



# GXII

400W RS-400-ACAA-B1  
 450W RS-450-ACAA-B1  
 550W RS-550-ACAA-B1  
 650W RS-650-ACAA-B1  
 750W RS-750-ACAA-B1



## Features

- Nonstop USB power - USB charging even when the PC is off
- Single +12V rail for superior load balancing and VGA compatibility
- High efficiency that meets 80 Plus Bronze
- Super silent & long lifespan HDB fan
- Dual filter from electromagnetic interference
- Huge bulk capacitor for hold-up times of >16ms when 80% loaded
- Multiple Protection Design (OVP/UVP/OC/OPP/SCP/OTP)
- High reliability (MTBF > 100,000 hrs)

## Package Information

EAN Code	4719512042052 (400W) 4719512042106 (450W) 4719512042113 (550W) 4719512042120 (650W) 4719512042274 (750W)
UPC Code	884102021176 (400W) 884102021220 (450W) 884102021237 (550W) 884102021244 (650W) 884102021398 (750W)
Package Information	227 x 223 x 96 mm
Carton Dimension	505 x 240 x 250 mm
Unit / Carton	5pcs
Carton / Pallet	30pcs

## Warranty

5 Year

## Specifications

Model	RS-400-ACAA-B1 RS-450-ACAA-B1 RS-550-ACAA-B1 RS-650-ACAA-B1 RS-750-ACAA-B1
Type	Intel Form Factor ATX 12V V2.31
PFC	Active PFC (>0.9 typical)
Dimension	150 x 140 x 86mm / 5.9 x 5.5 x 3.4 inch
Input Voltage	90-264Vac (Full range)
Input Frequency	47-63Hz
Fan Type	120mm intelligent fan
Efficiency	85%@ Typical Load
MTBF	>100,000 Hours
Protection	OVP / UVP / OCP / OPP / SCP / OTP CE, UL, FCC, CCC, TUV, C-tick, KCC, CSA, BSMI, GOST
Regulatory	
Connectors	<p><b>400W, 450W :</b>            MB 20+4 Pin x 1            CPU12V 4+4 Pin x 1            PCI-e 6 Pin x 1            SATA x 4            4Pin Peripheral x 2            4Pin Floppy x 1            USB Charger cable x 1</p> <p><b>550W, 650W :</b>            MB 20+4 Pin x 1            CPU12V 4+4 Pin x 1            PCI-e 6+2 Pin x 2            SATA x 6            4Pin Peripheral x 3            4Pin Floppy x 1            USB Charger cable x 1</p> <p><b>750W:</b>            MB 20+4 Pin x 1            CPU12V 4+4 Pin x 1            PCI-e 6+2 Pin x 4            SATA x 9            4Pin Peripheral x 3            4Pin Floppy x 1            USB Charger cable x 1</p>



## Output Rating

### 400W:

AC INPUT	100-240V~ 6-3A 60-50Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vsb
	20A	15A	30A	0.3A	2.5A
OUTPUT POWER	120W		360W	3.6W	12.5W
	400W				

### 450W:

AC INPUT	100-240V~ 7-3.5A 60-50Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vsb
	20A	15A	35A	0.3A	2.5A
OUTPUT POWER	120W		420W	3.6W	12.5W
	450W				

### 550W:

AC INPUT	100-240V~ 9-4.5A 60-50Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vsb
	20A	20A	44A	0.3A	2.5A
OUTPUT POWER	120W		528W	3.6W	12.5W
	550W				

### 650W:


AC INPUT	100-240V~ 10-5A 60-50Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vsb
	20A	20A	52A	0.3A	2.5A
OUTPUT POWER	120W		624W	3.6W	12.5W
	650W				

### 750W:

AC INPUT	100-240V~ 12-6A 60-50Hz				
DC OUTPUT	+3.3V	+5V	+12V	-12V	+5Vsb
	20A	20A	60A	0.3A	2.5A
OUTPUT POWER	120W		720W	3.6W	12.5W
	750W				

Cable info

400&450W:

<p>1 x</p> <p>MB 20+4 pins</p> 	<p>500mm</p> 
<p>1 x</p> <p>CPU 4+4 pins</p> 	<p>600mm</p> 
<p>1 x</p> <p>PCI-e 6 pins</p> 	<p>500mm</p> 
<p>4 x</p> <p>SATA</p>  <p>2 x</p> <p>Peripherals</p>  <p>1 x</p> <p>Floppy</p> 	
<p>1 x</p> <p>USB charger cable</p> 	<p>300mm</p> 



**550&650W:**


<p>1 x</p> <p>MB 20+4 pins</p> 	<p>500mm</p> 
<p>1 x</p> <p>CPU 4+4 pins</p> 	<p>600mm</p> 
<p>2 x</p> <p>PCI-e 6+2 pins</p> 	<p>500mm 150mm</p> 
<p>6 x</p> <p>SATA</p>  <p>3 x</p> <p>Peripherals</p>  <p>1 x</p> <p>Floppy</p> 	<p>450mm 100mm 100mm</p>  <p>450mm 100mm 100mm</p>  <p>450mm 150mm 150mm 150mm</p> 
<p>1 x</p> <p>USB charger cable</p> 	<p>300mm</p> 



750W:

<p>1 x</p> <p>MB 20+4 pins</p> 	<p>500mm</p> 
<p>1 x</p> <p>CPU 4+4 pins</p> 	<p>600mm</p> 
<p>4 x</p> <p>PCI-e 6+2 pins</p> 	<p>500mm 150mm</p>  <p>500mm 150mm</p> 
<p>9 x</p> <p>SATA</p>  <p>3 x</p> <p>Peripherals</p>  <p>1 x</p> <p>Floppy</p> 	<p>450mm 100mm 100mm 100mm</p>  <p>450mm 100mm 100mm 100mm</p>  <p>450mm 150mm 150mm 150mm 150mm</p> 
<p>1 x</p> <p>USB charger cable</p> 	<p>300mm</p> 

USB Charger Cable

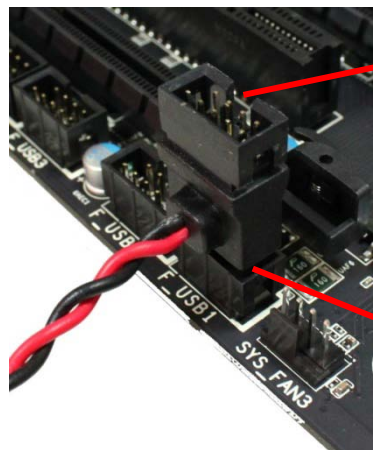

Connect case front panel USB

Connect to M/B USB header