


SC APC Fiber Optic Pigtail

Avalon angle polished (APC) pigtails are made by polishing the fiber either at 8 or 9 degrees angle with a radius of curvature between 5mm and 12mm. This fiber has a typical insertion loss of 0.2 dB per connection and APC polished end faces at 65dB minimum return loss. It also passes the international standards of all TIA/EIA-568-B.3, ISO/IEC 11801 OS1 performances and complies with the UL 1666 flame rating.

Features

- Pass all ISO/IEC 11801 IS1 performance requirements
- Jacketed cable compliant with UL 1666 flame rating
- 100% factory inspected end face geometry in Compliance with TELCODIA GR-326-Core
- Typical Insertion loss per connection is 0.2dB
- APC Polished end faces 65db minimum return loss

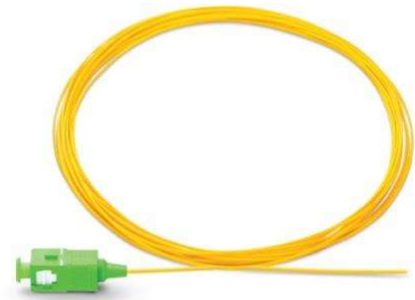

Applications

- Telecommunication Networks
- LAN, WAN, CATV
- FTTX, FTTH
- Fiber Communication Systems Data Processing Networks, Industrial, Mechanical and Military

Specification

Part Number	Description
Fiber Type	Single-mode, Simplex
Return Loss	.45dB
Mating Durability	0.2dB typical change, 1000 times
Operating Temperature	-40 — +75°C
Storage Temperature	-40 — +85°C

Ordering information

Part Number *	Description
ANPT-SM-SC/APC-1MT	Fiber SC Pigtail, Single Mode, APC, 0.9MM LSZH, 1 Meter