

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB


7380A SAM™ Studio Subwoofer Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

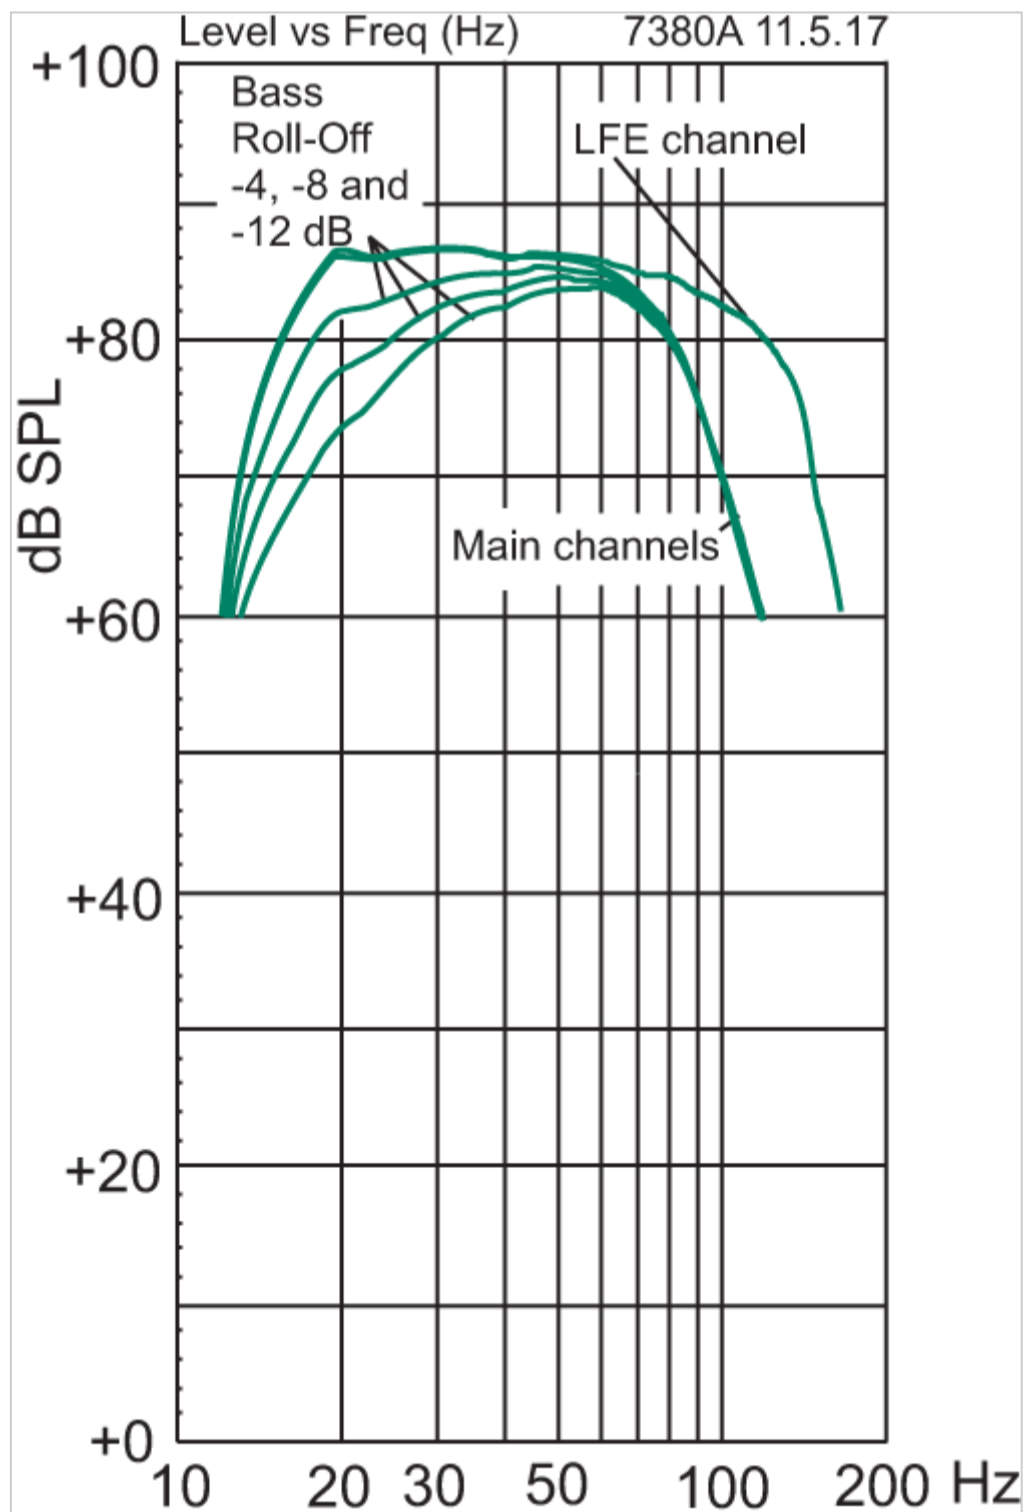

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB

7380A SAM™ Studio Subwoofer


Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

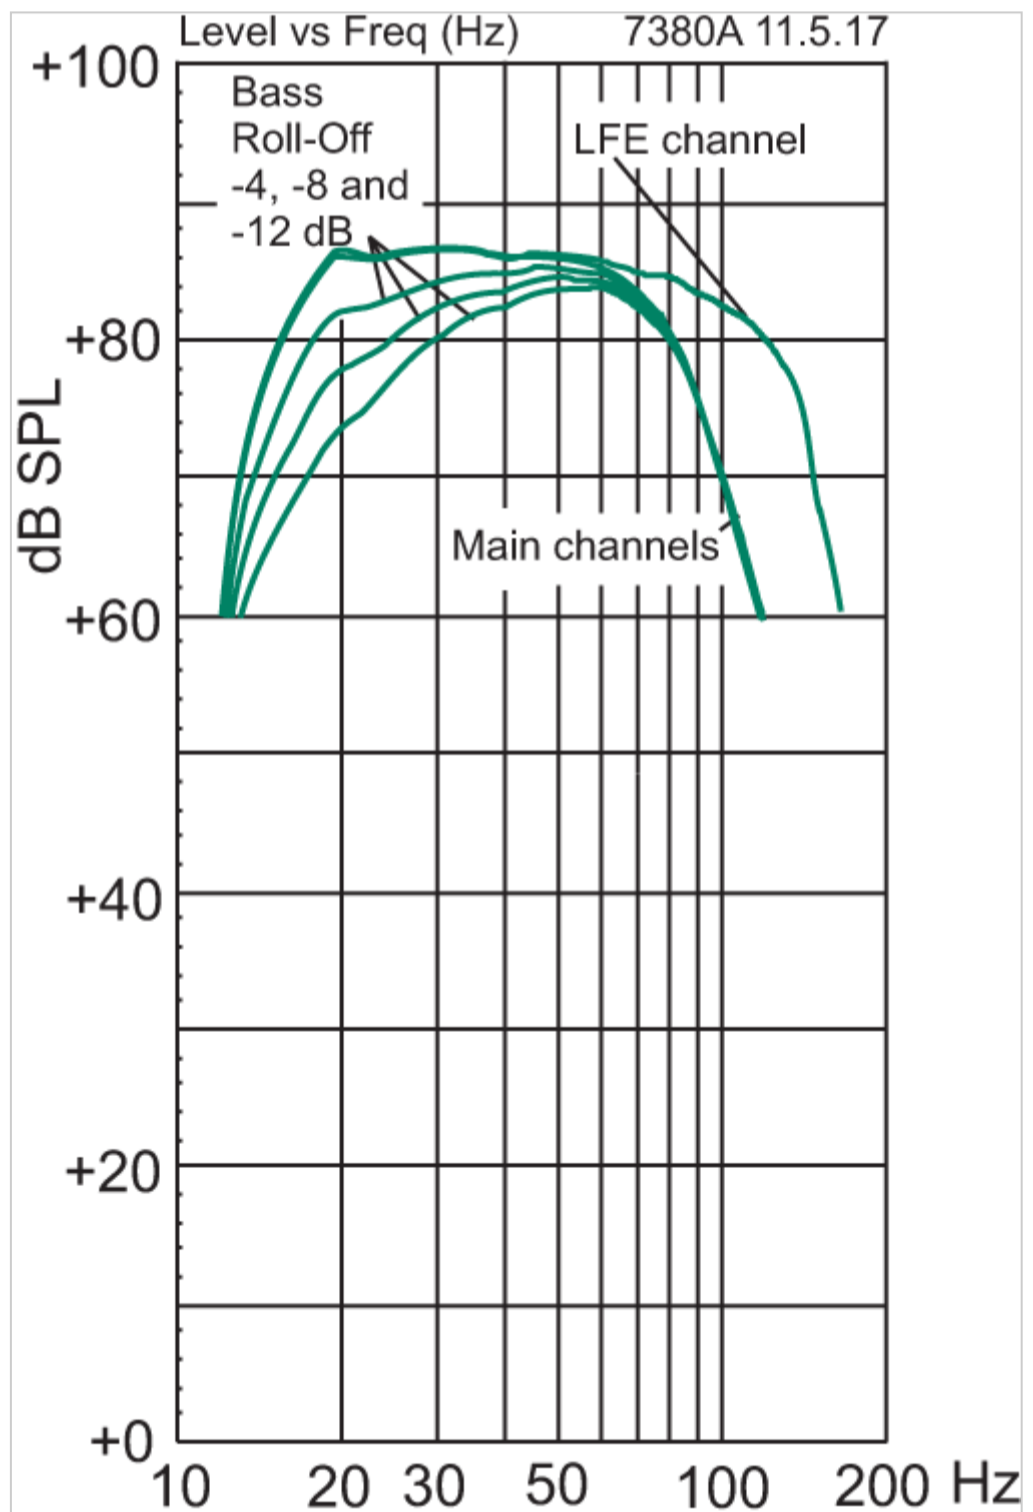

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB

7380A SAM™ Studio Subwoofer


Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

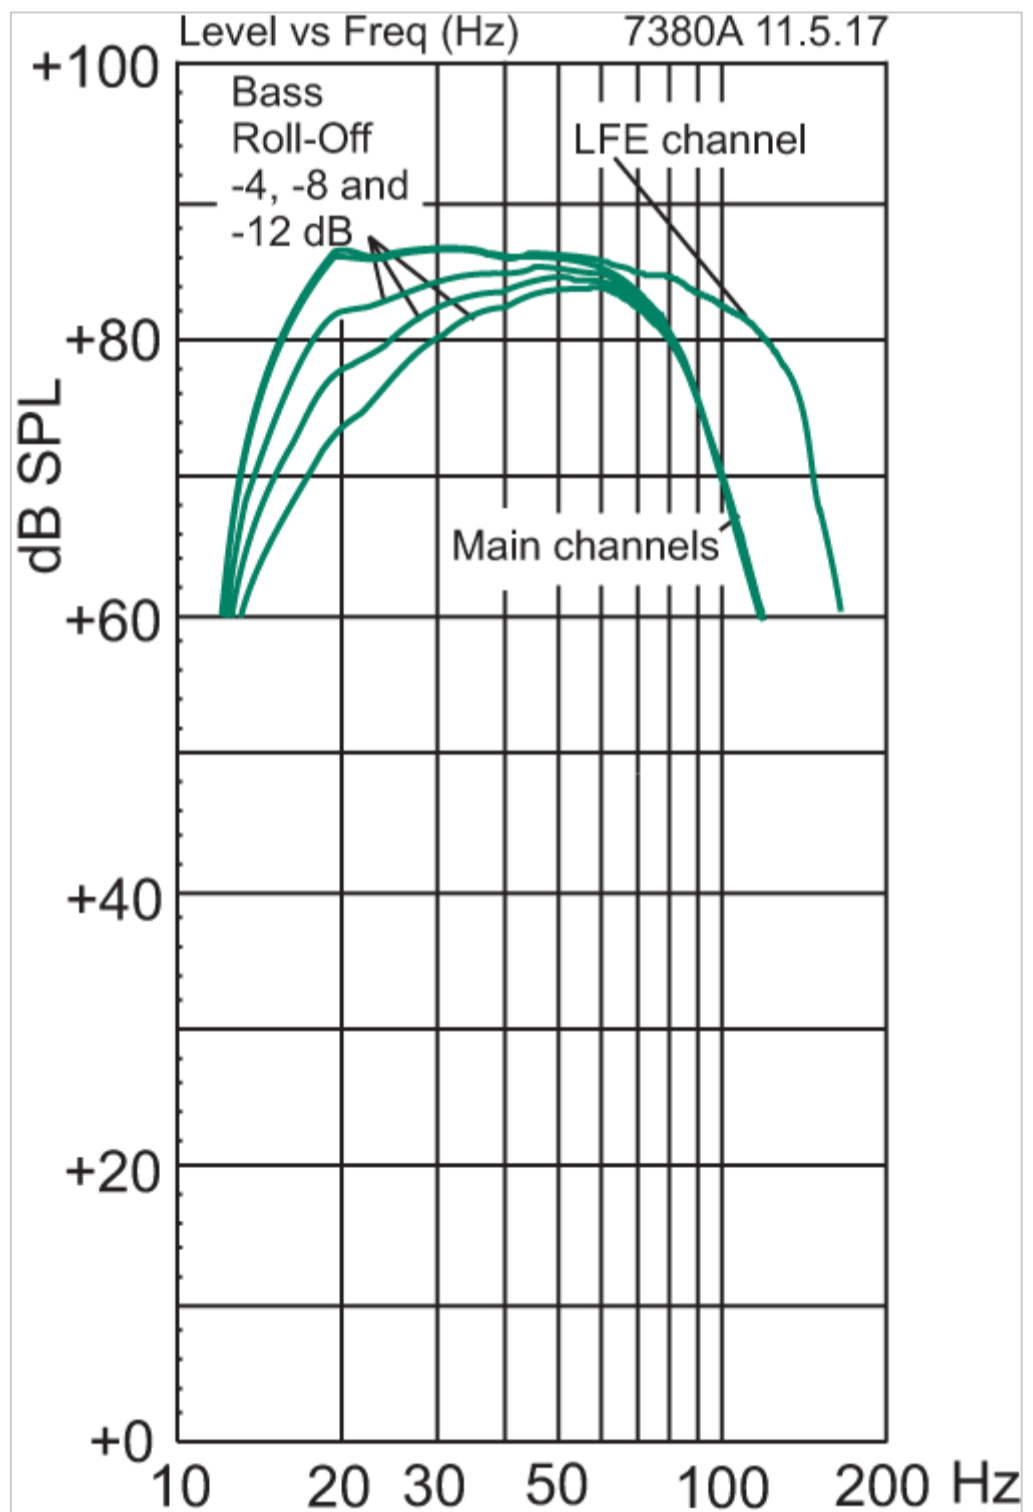

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB

7380A SAM™ Studio Subwoofer


Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

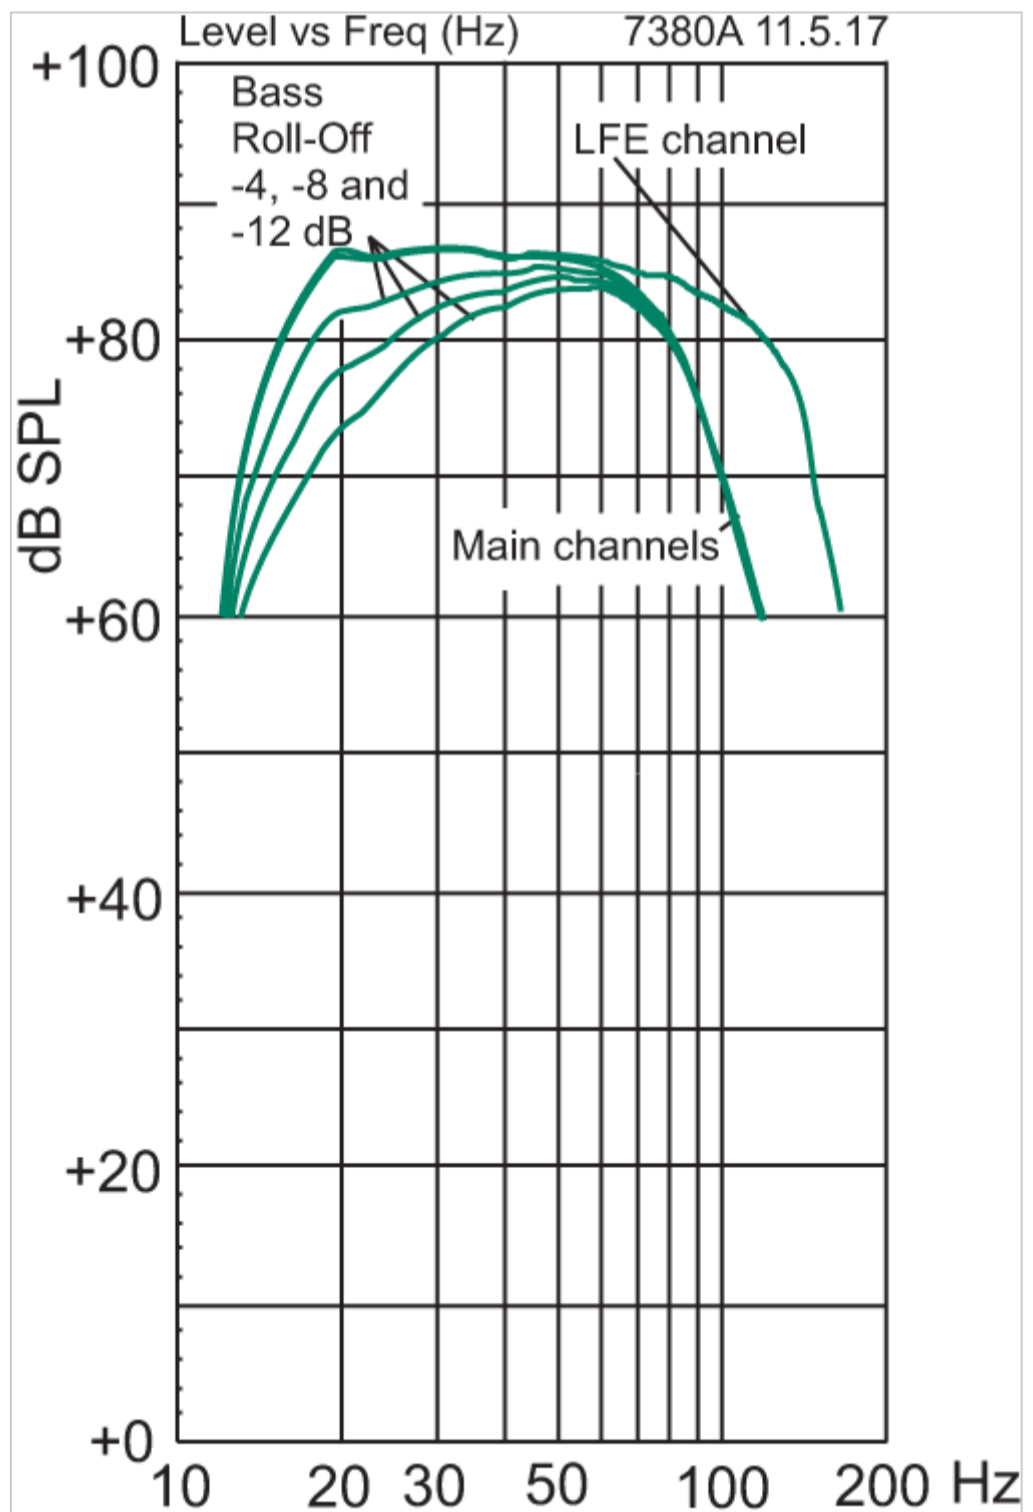

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB

7380A SAM™ Studio Subwoofer


Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

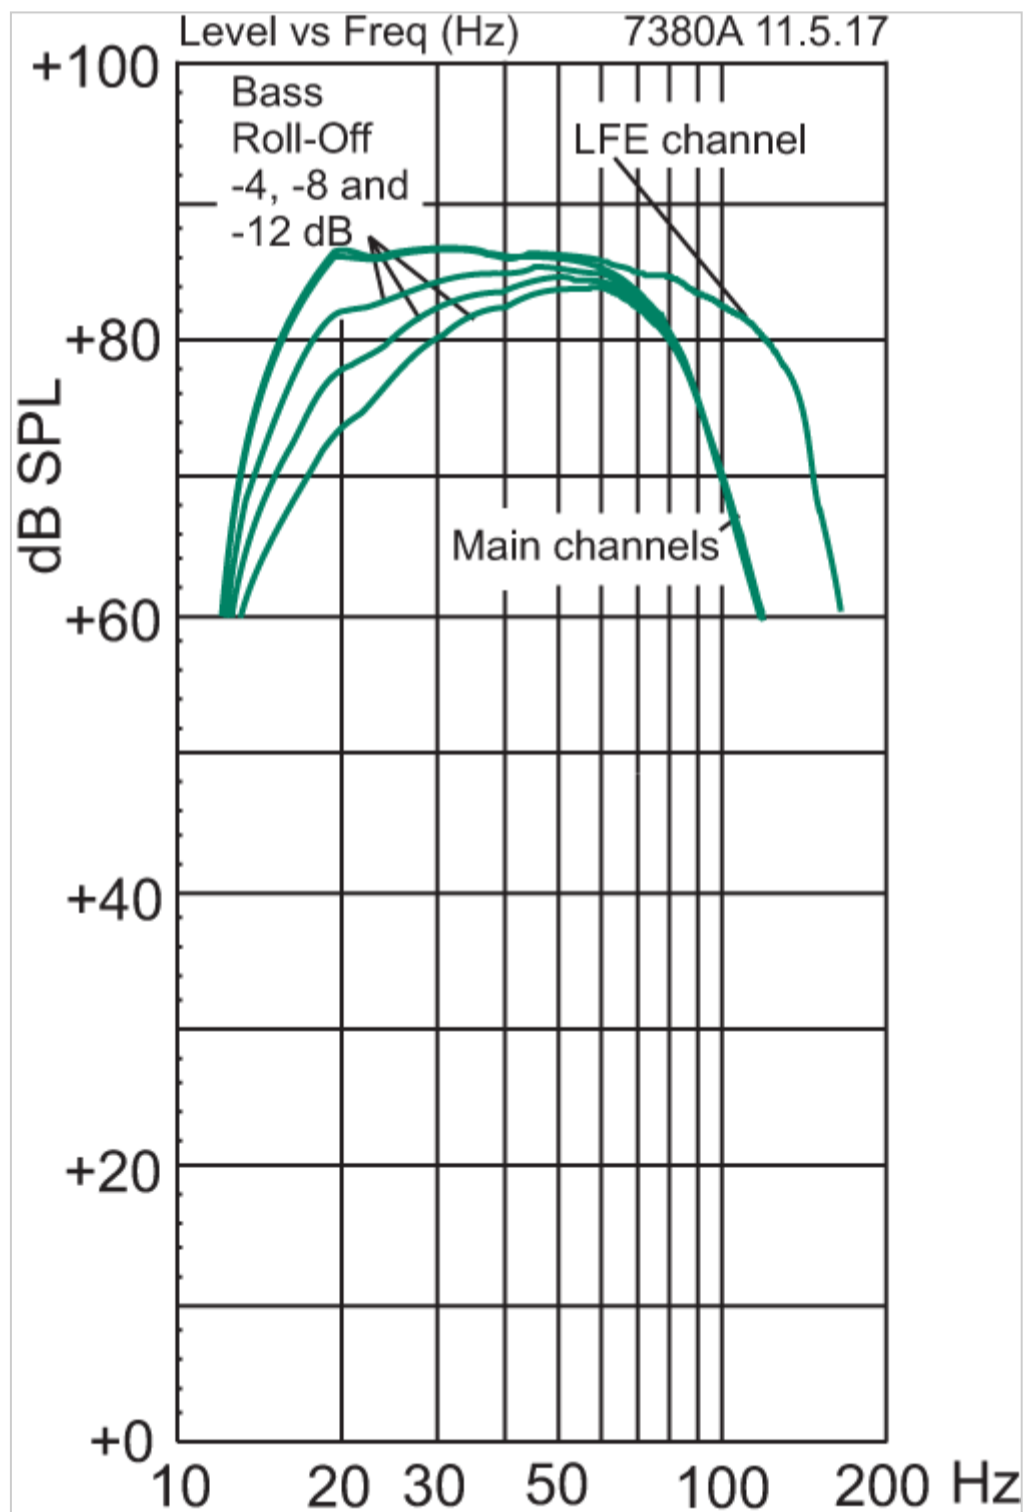

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB

7380A SAM™ Studio Subwoofer


Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

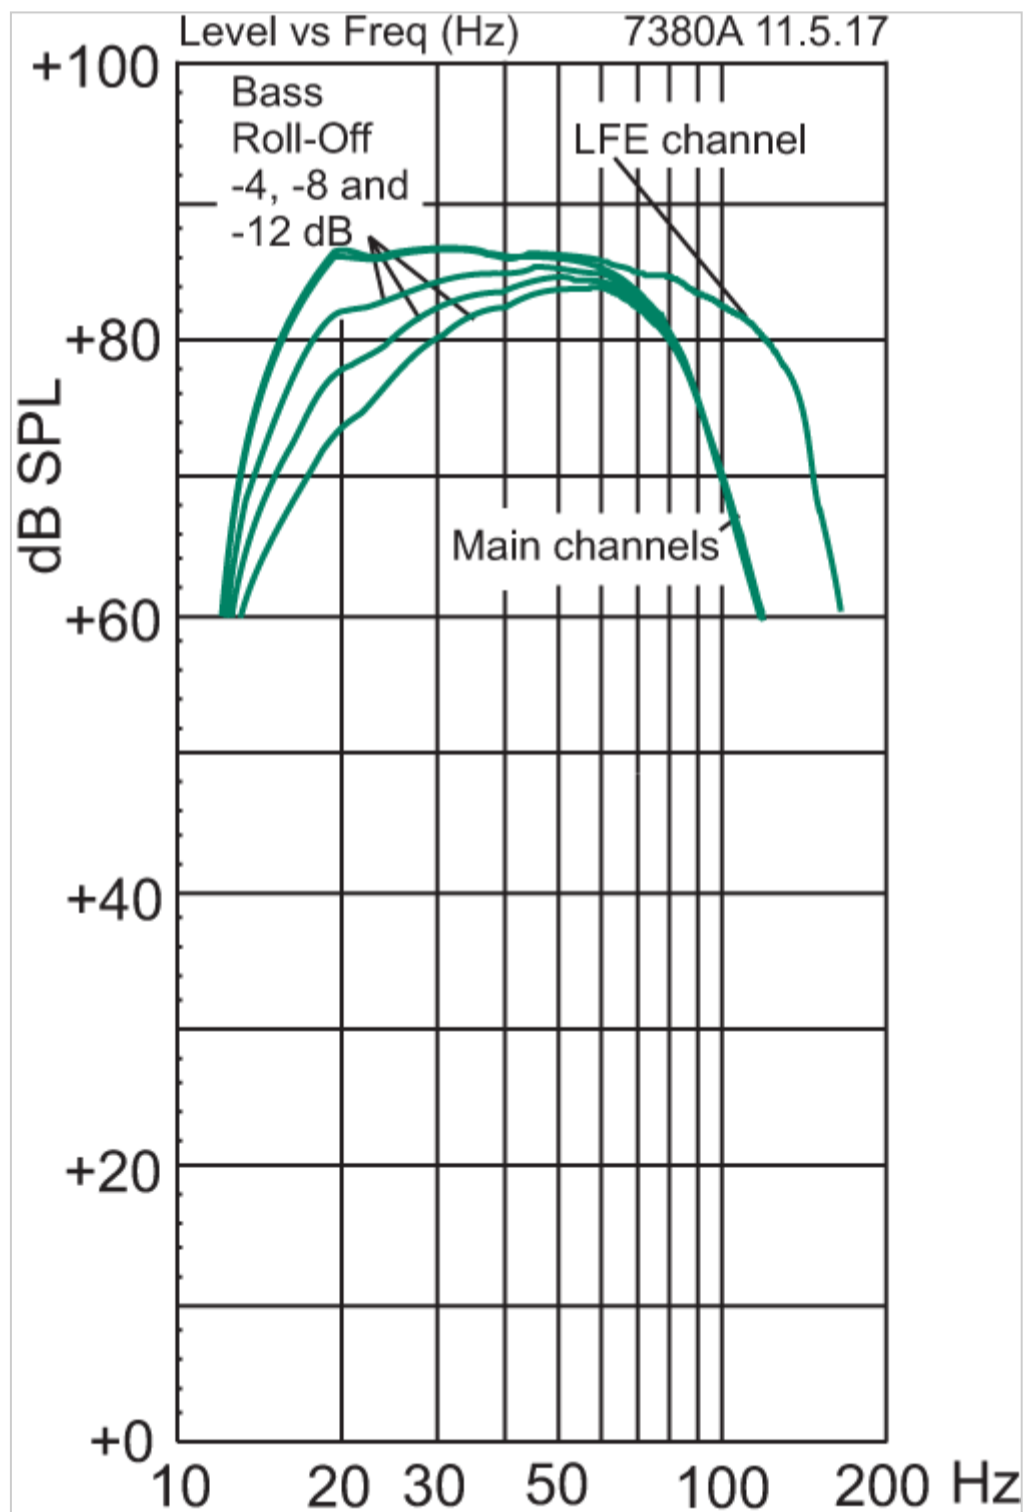

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
≤5 dB

7380A SAM™ Studio Subwoofer


Technical Specifications

System Specifications

Frequency Response

Low cutoff -6dB
16 Hz

High cutoff -6dB
100 Hz

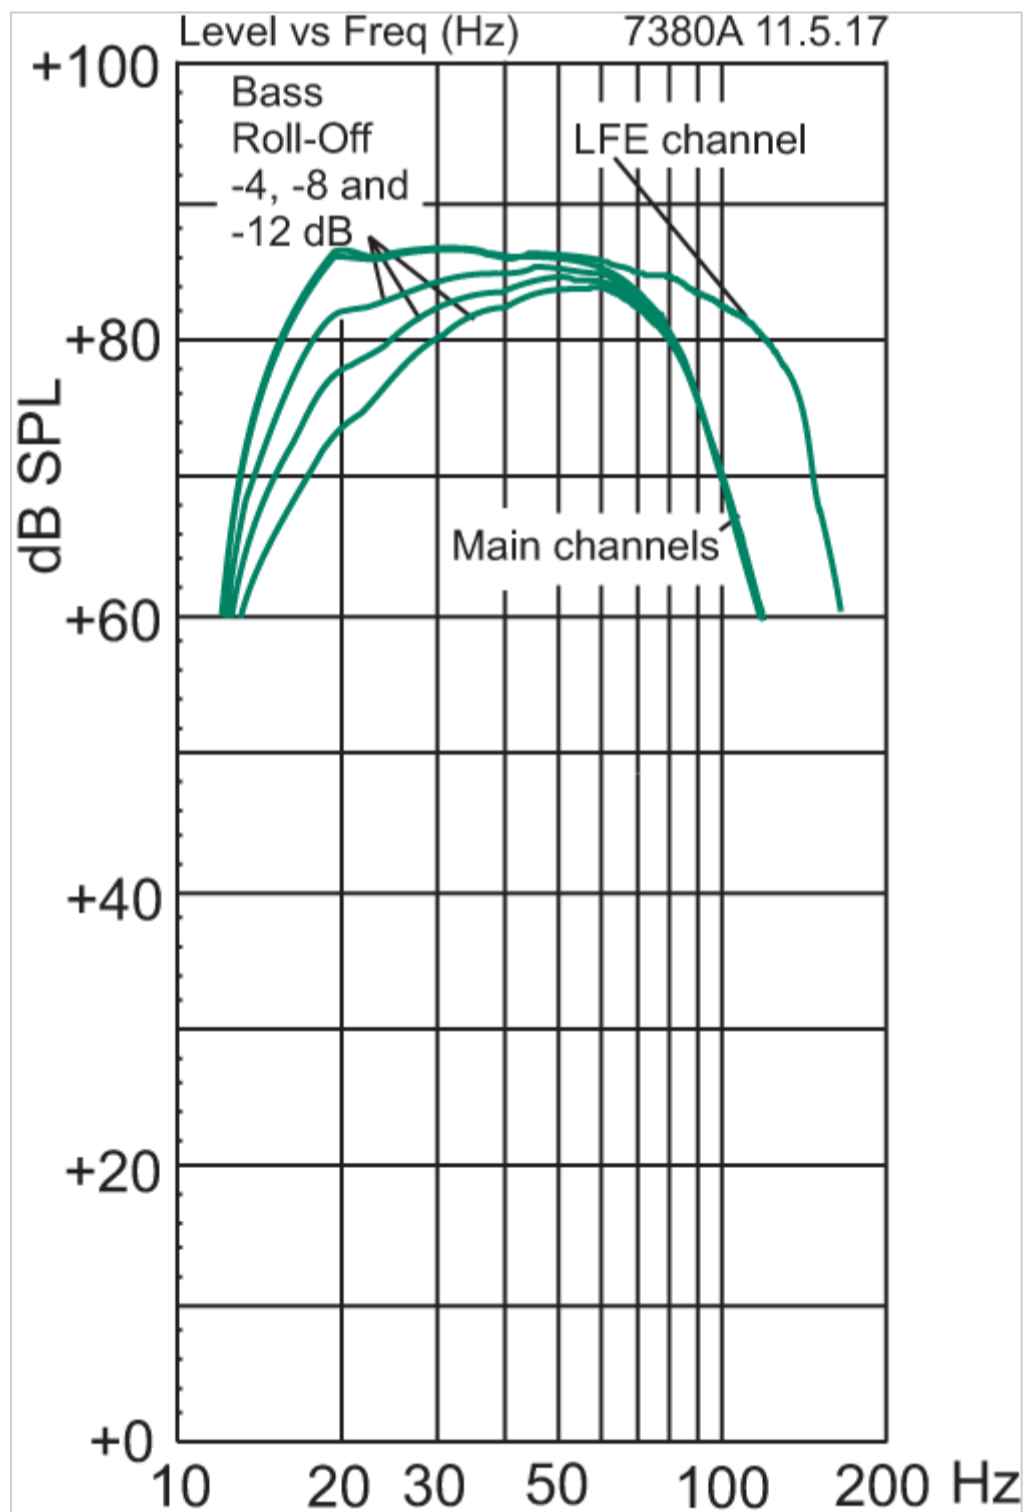

SPL

Peak SPL
≥123 dB

Maximum peak SPL output with random pink noise, measured in half space at 1 meter.

Short term max SPL
≥119 dB

≥119 dB

Maximum short term sine wave SPL output averaged from 30 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise

≤5 dB

