

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

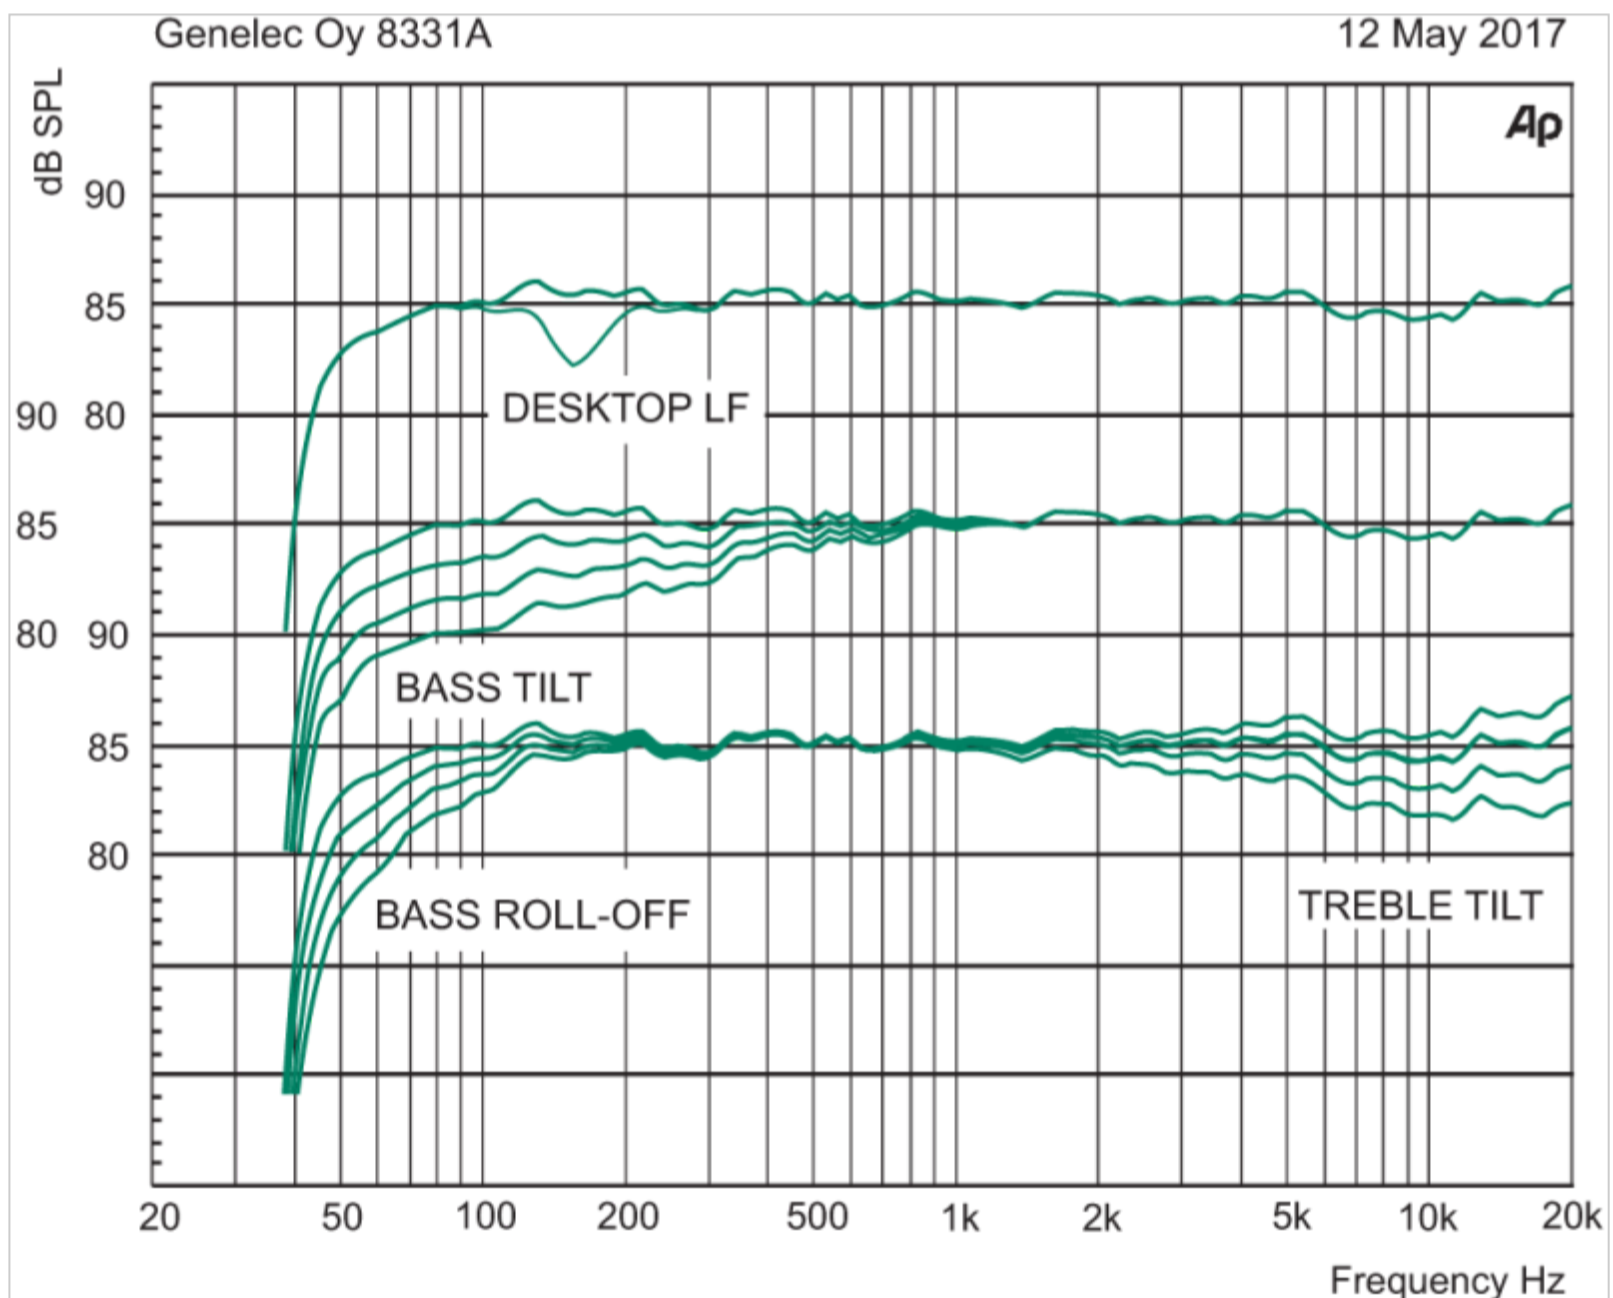

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor

Technical Specifications

System Specifications

Frequency Response


58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB

45 Hz

High cutoff -6dB

37 kHz

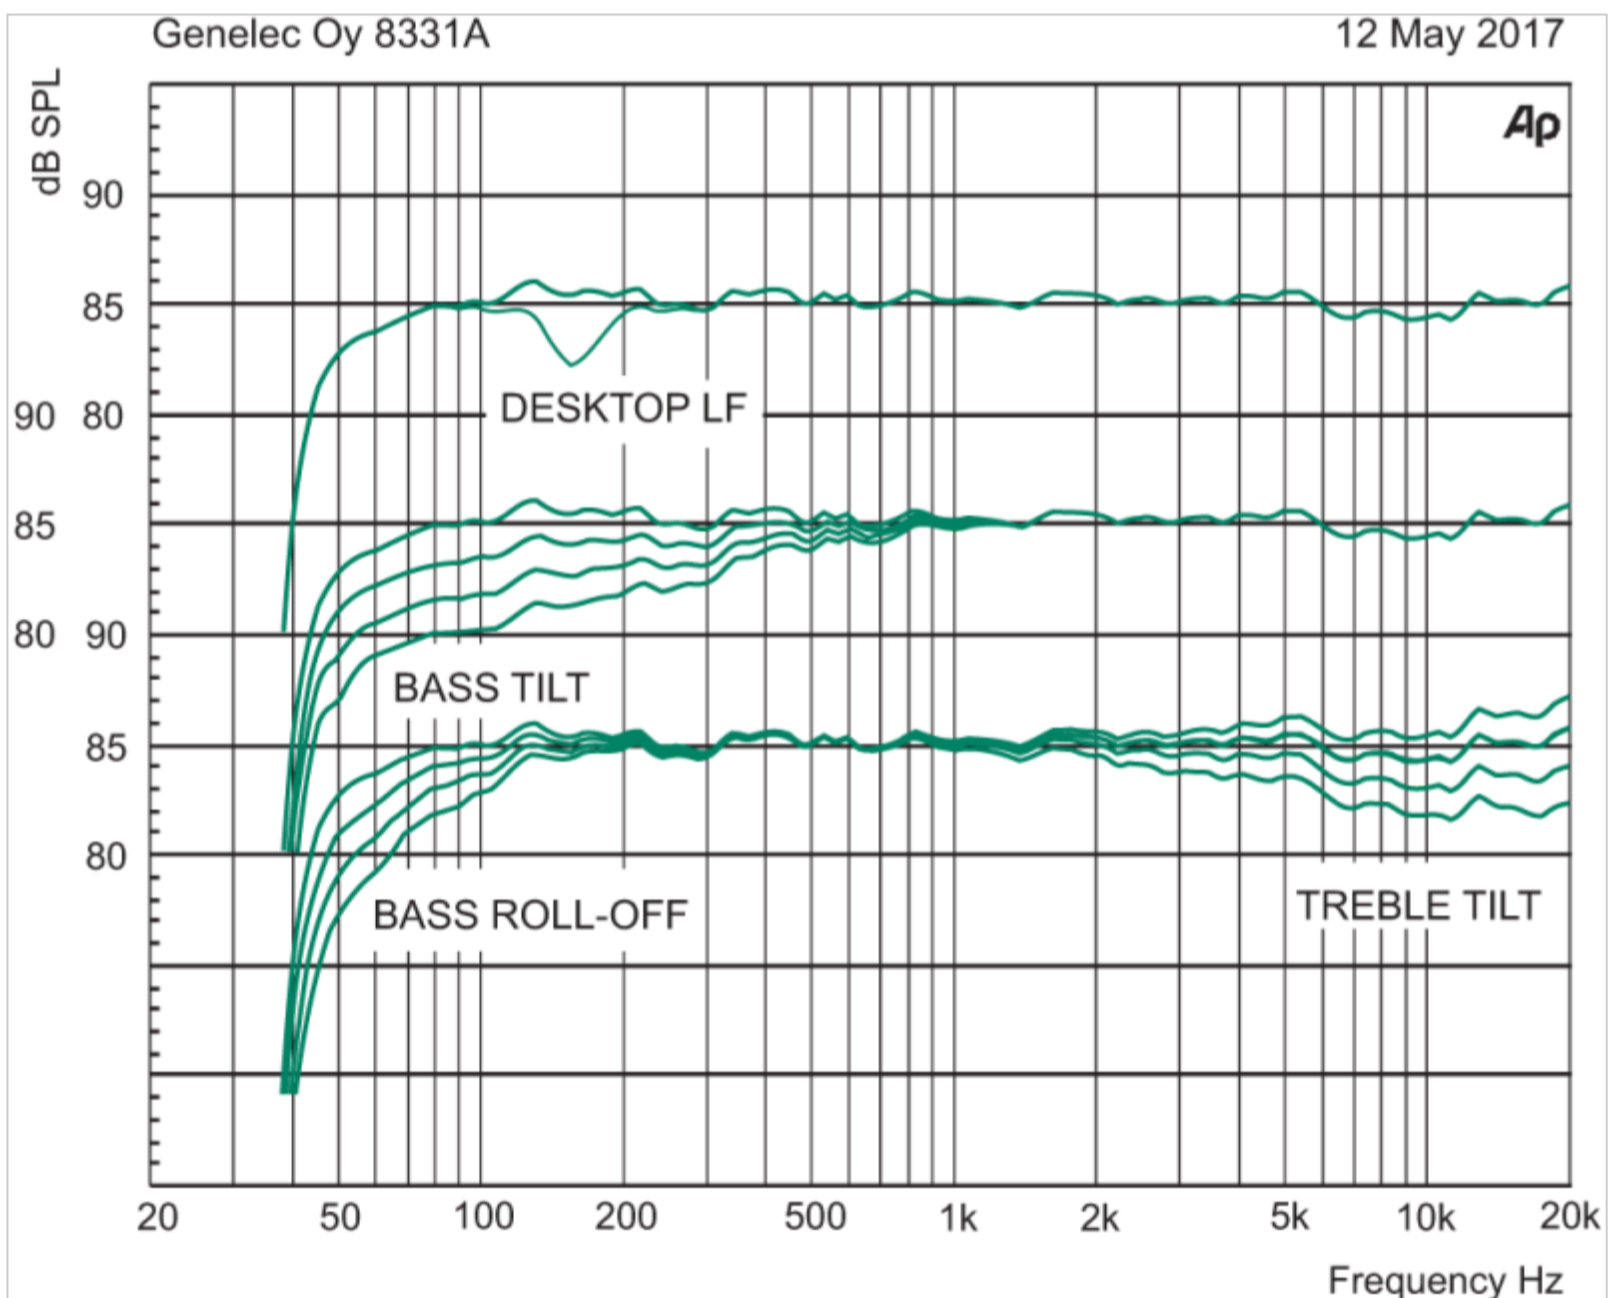

SPL

Peak SPL

≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL

≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

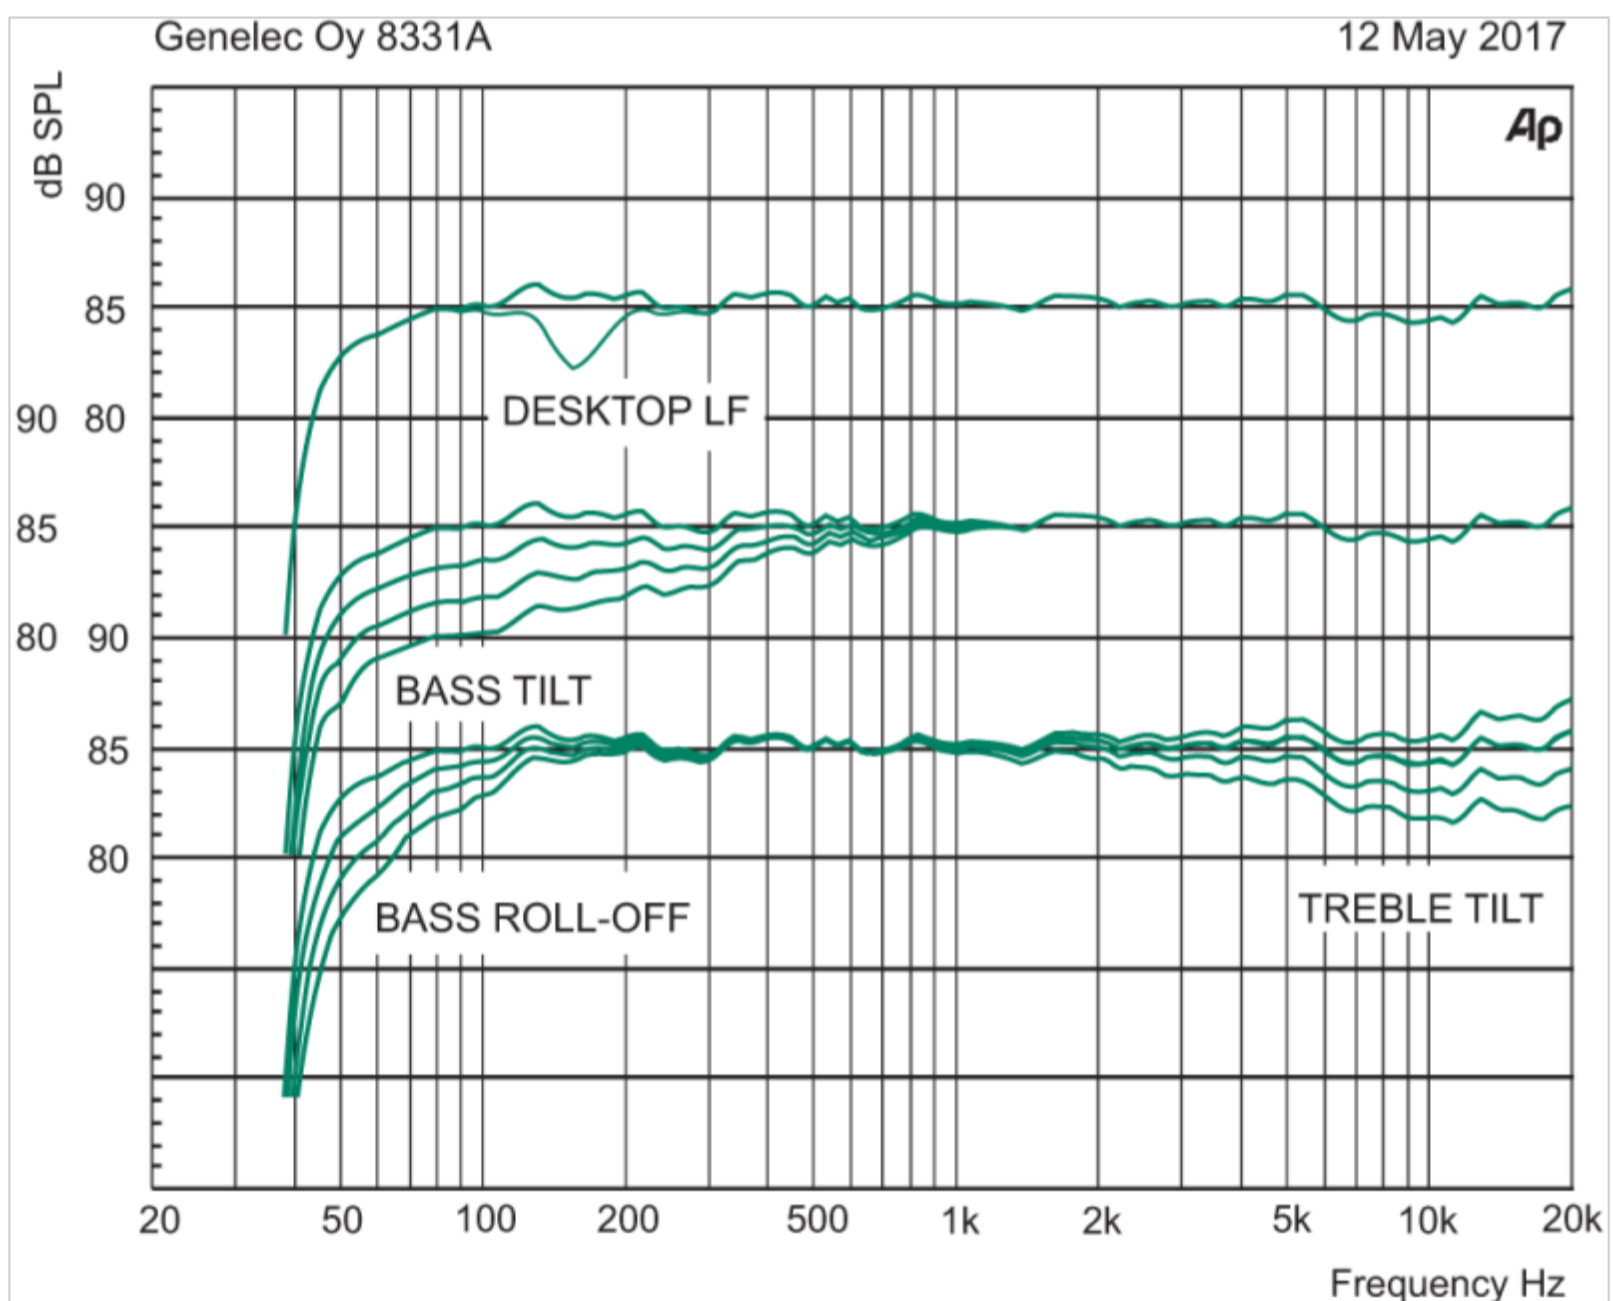

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

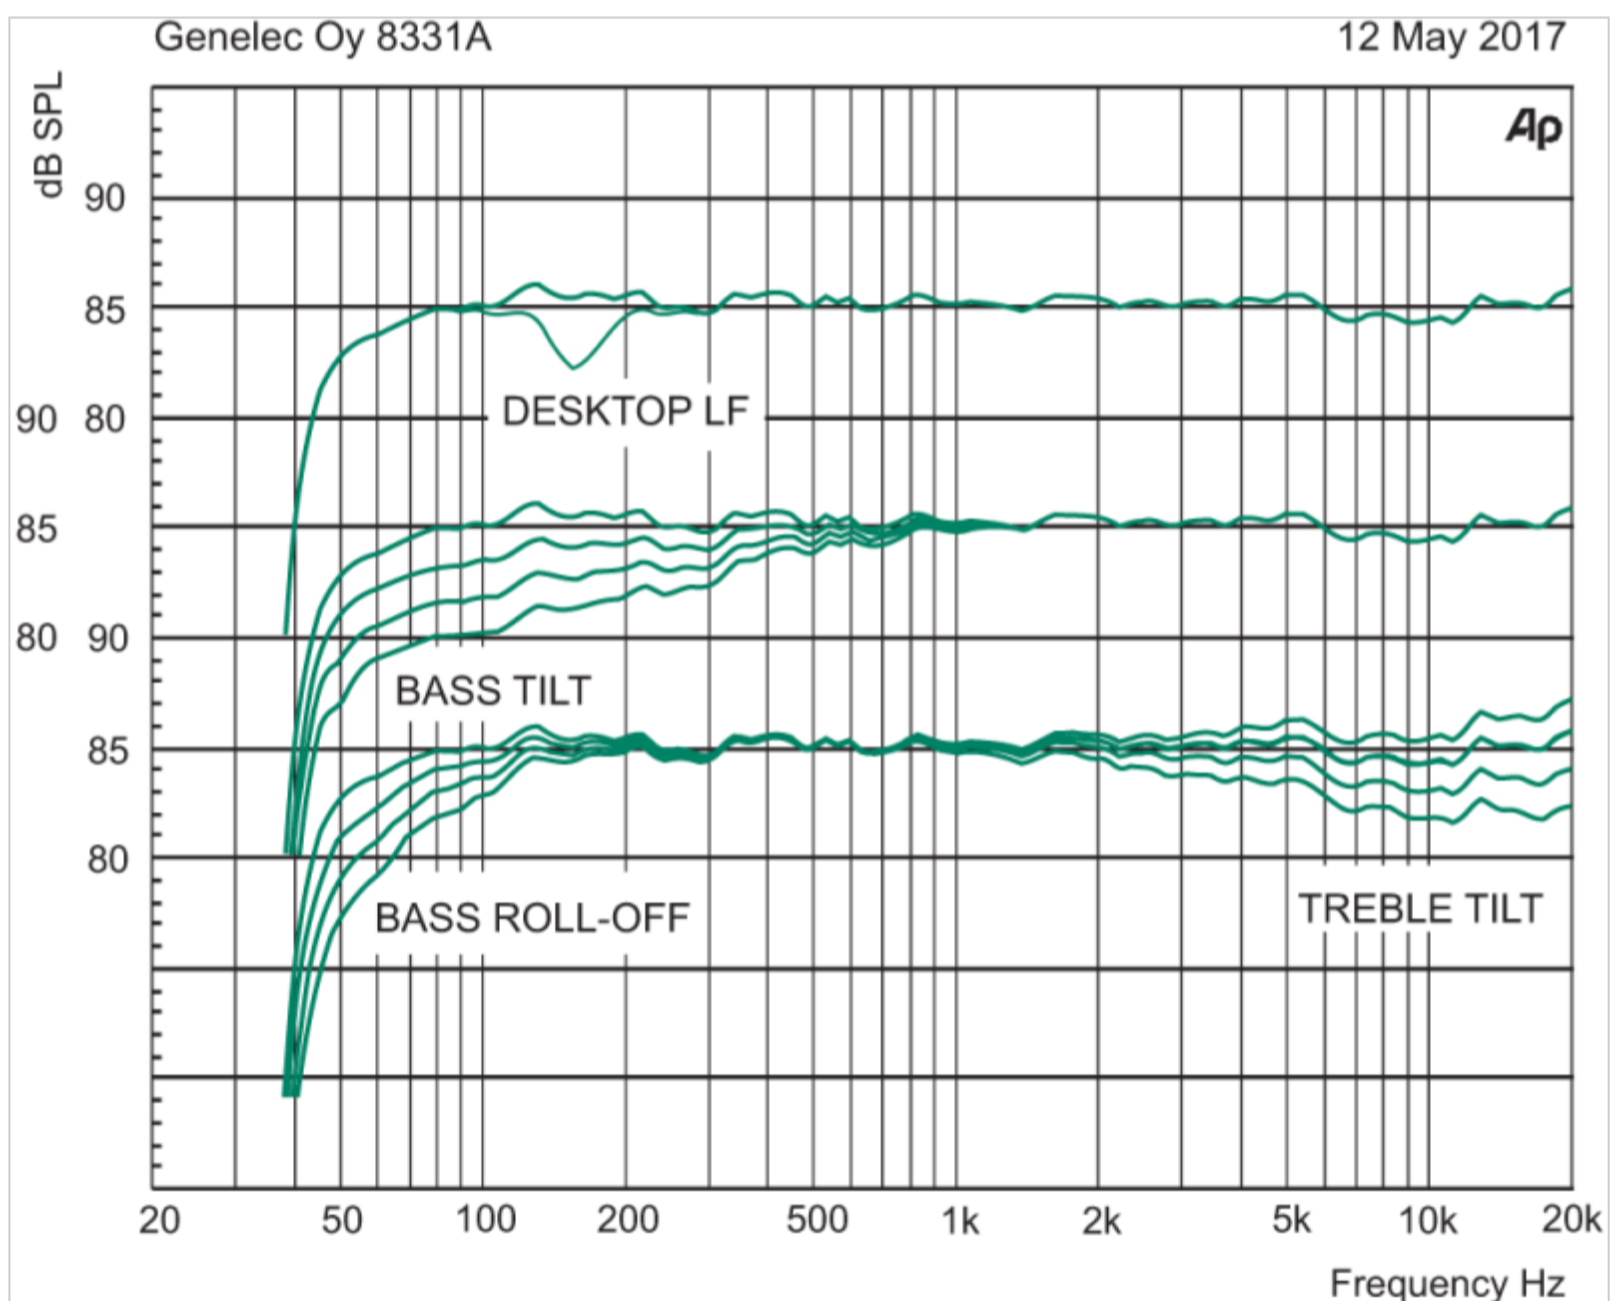

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

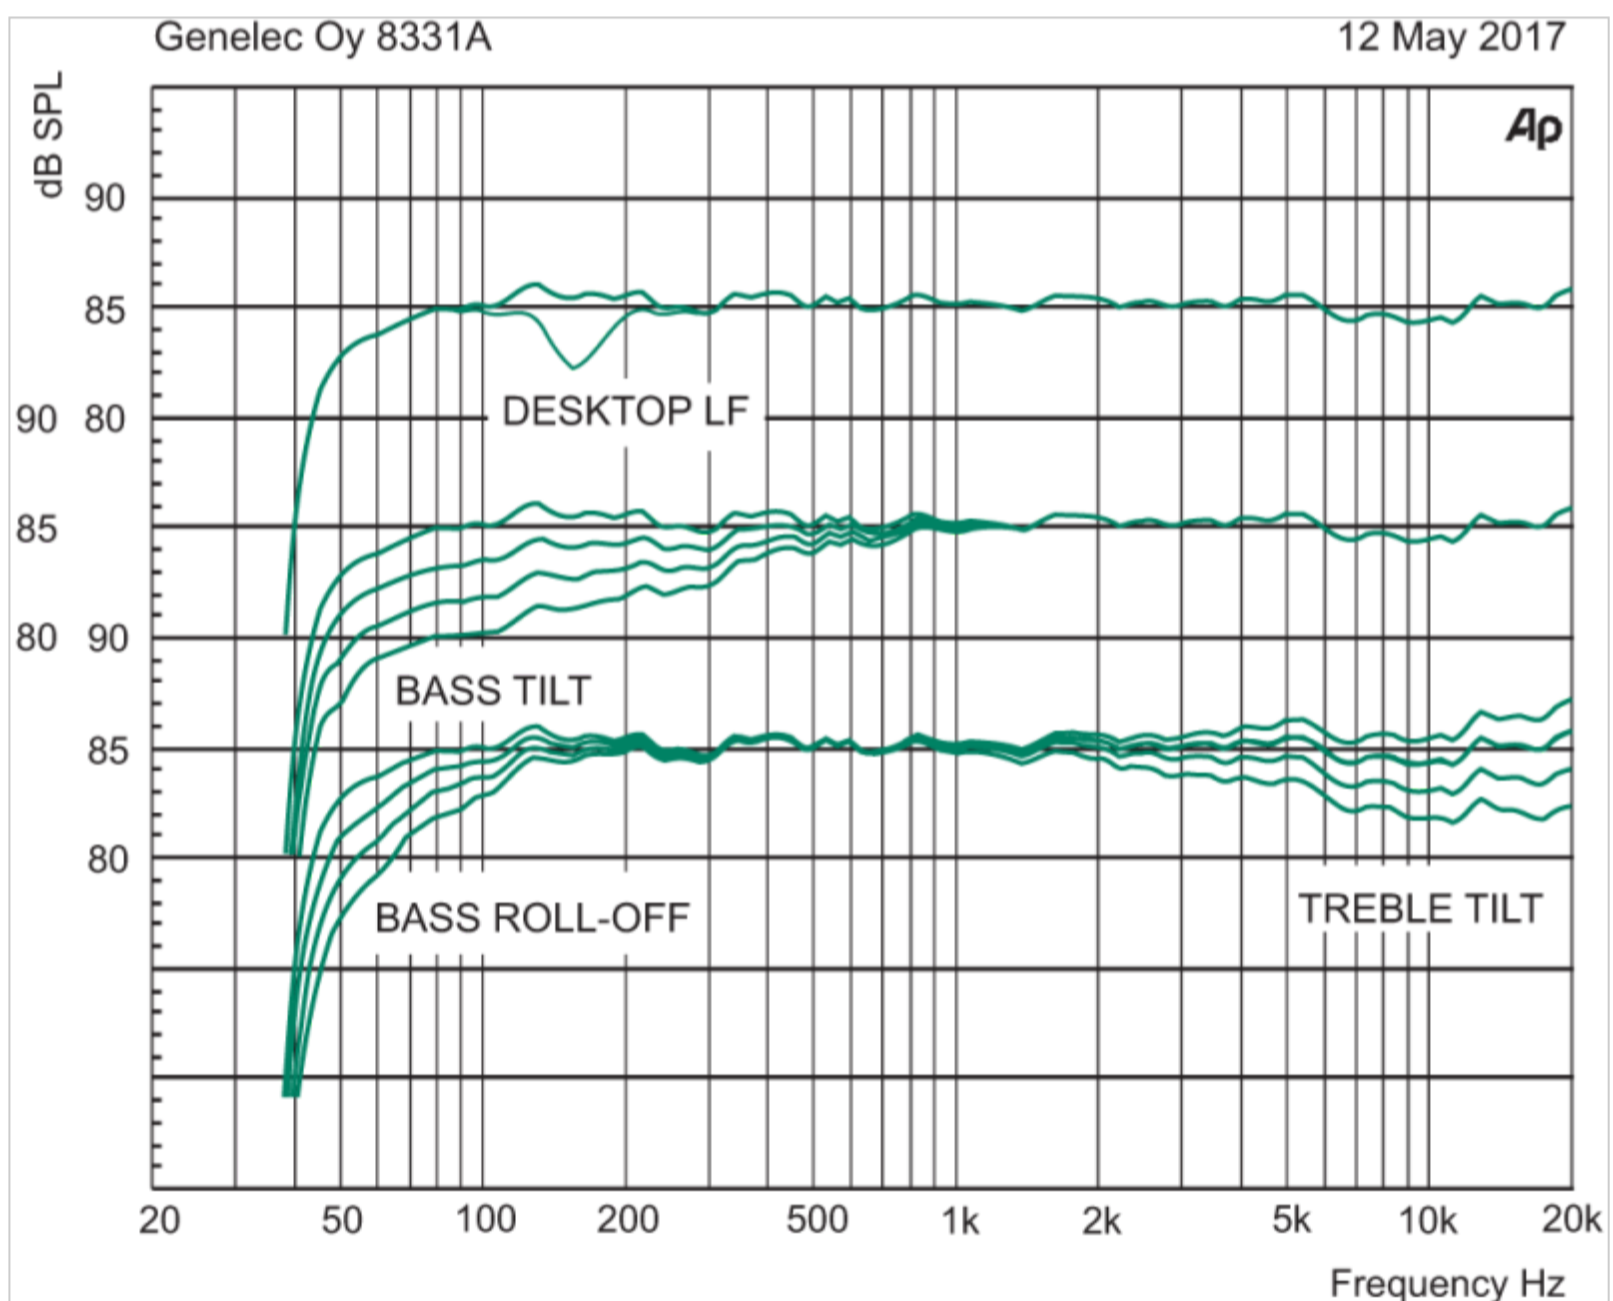

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

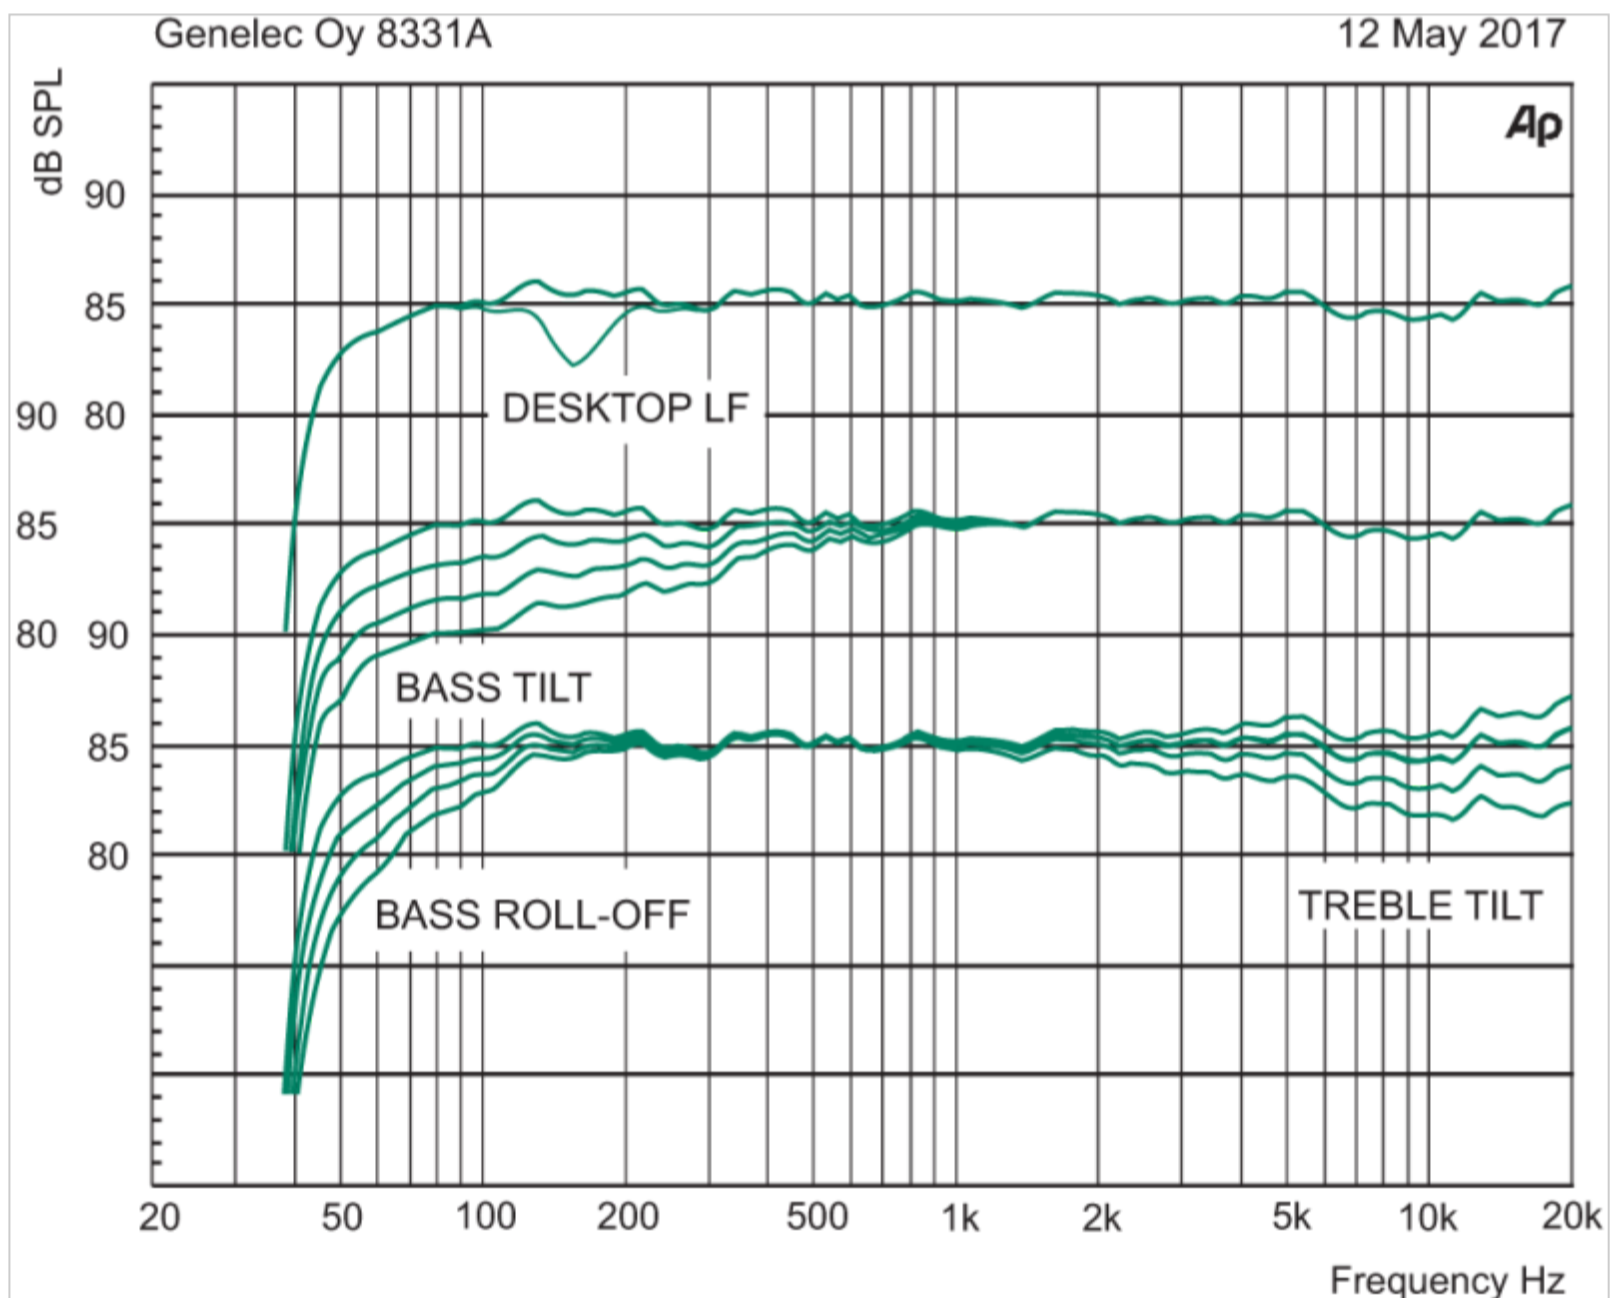

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

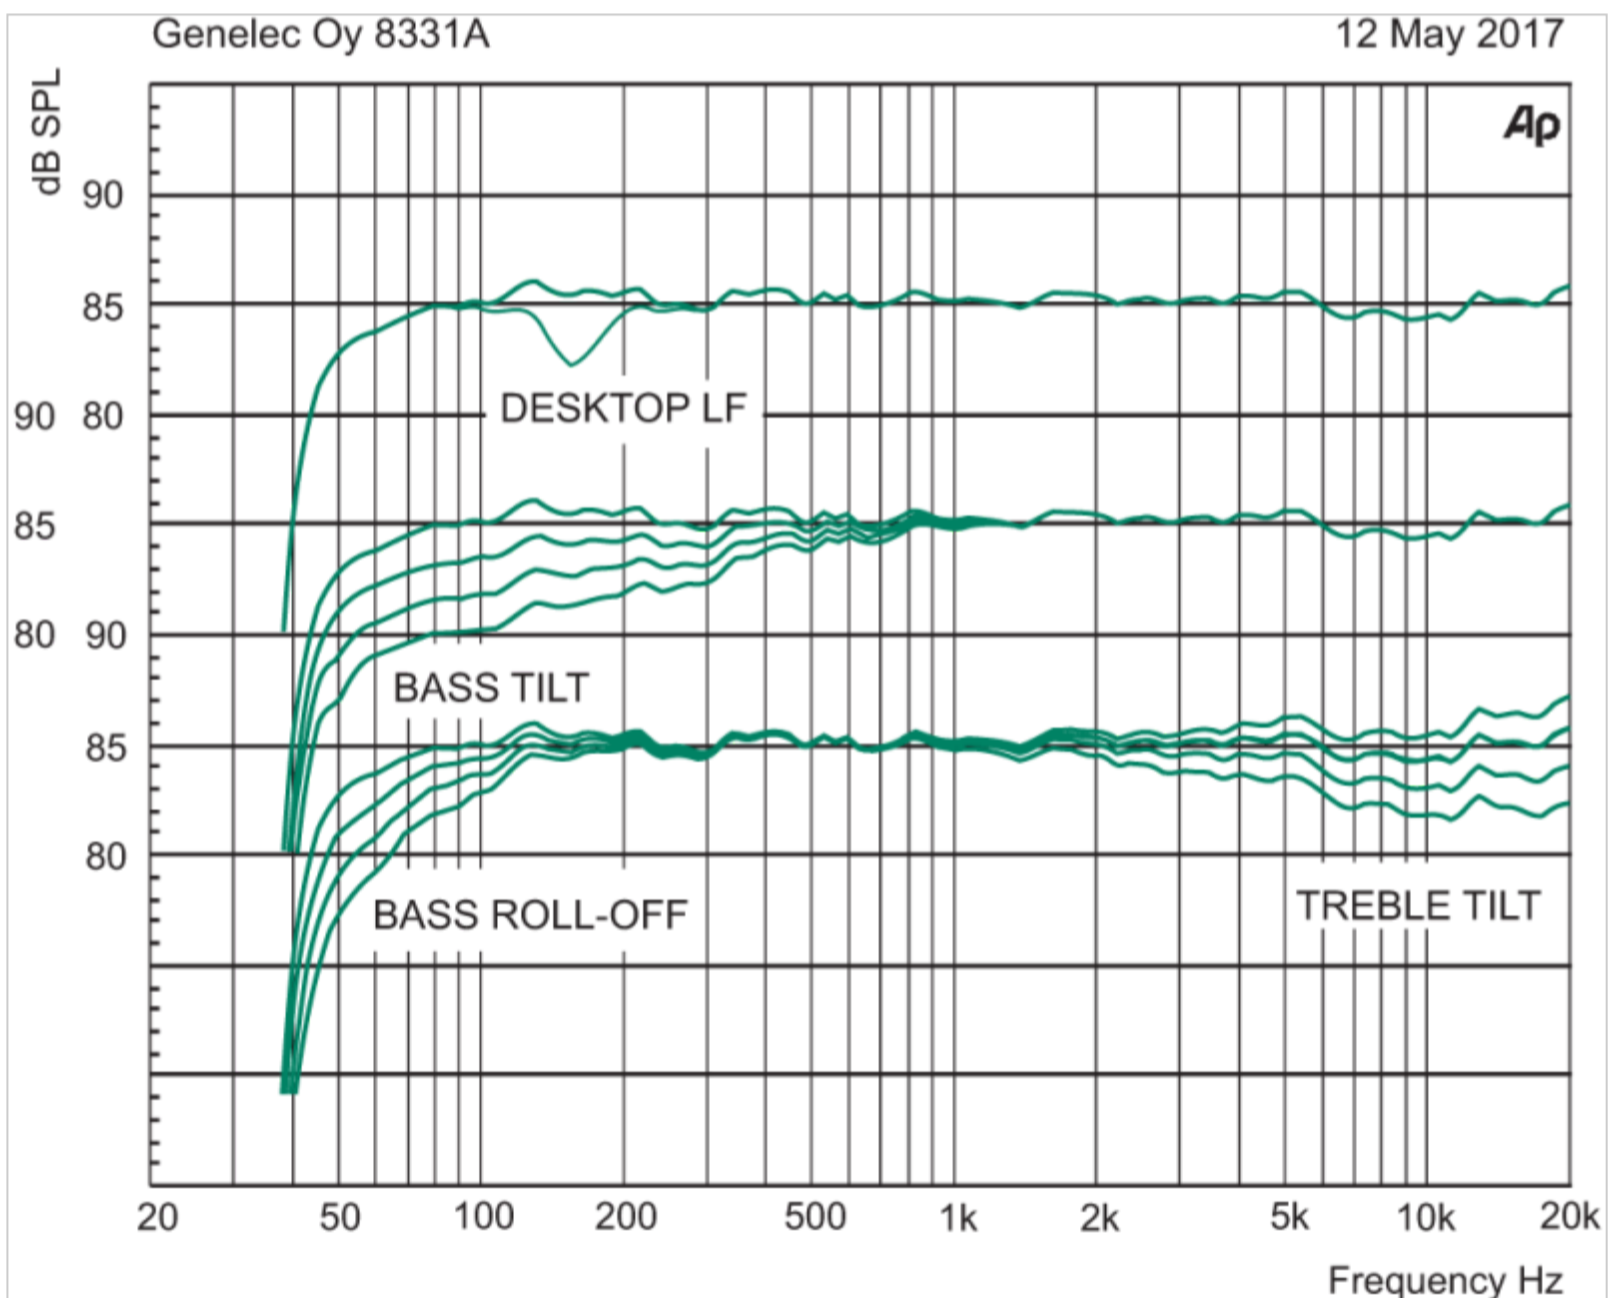

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8331A SAM™ Studio Monitor Technical Specifications


System Specifications

Frequency Response

58 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
45 Hz

High cutoff -6dB
37 kHz

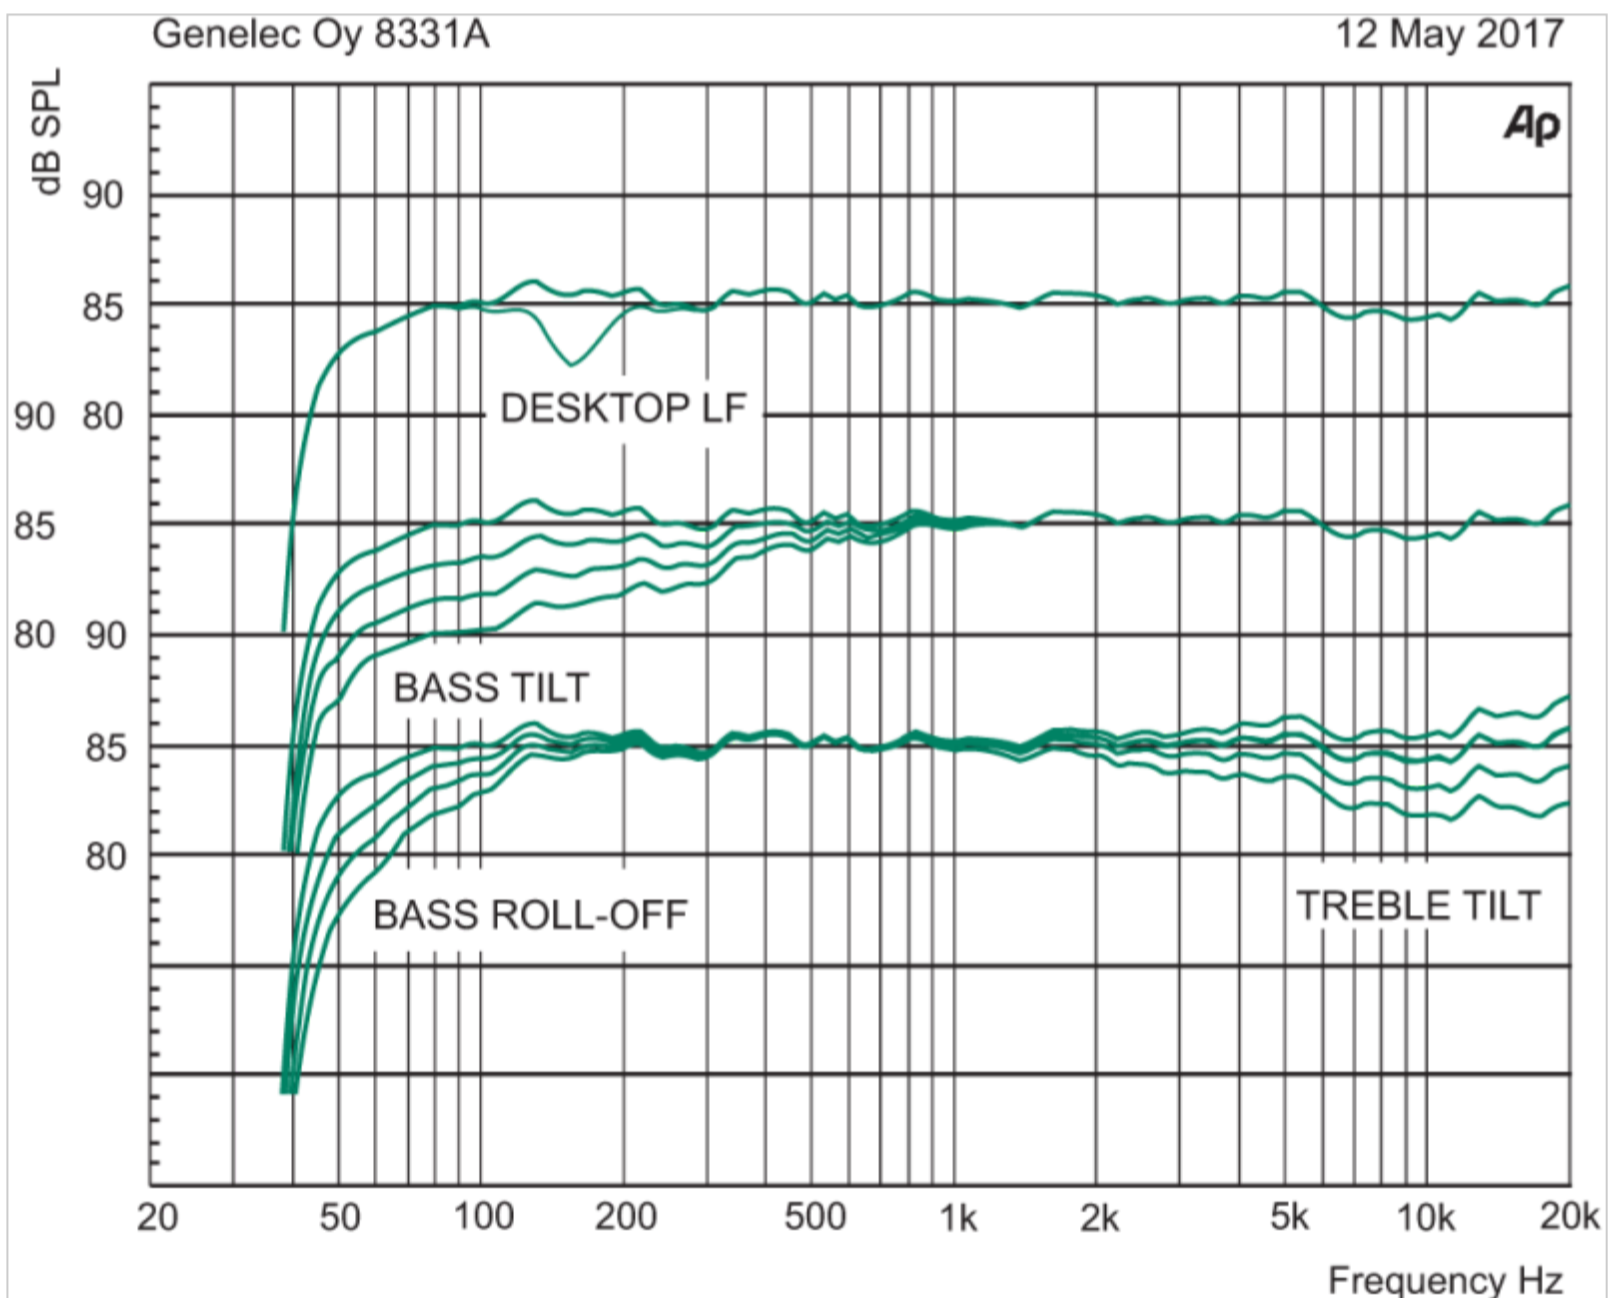

SPL

Peak SPL
≥110 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥104 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 5 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

Self-generated noise

