

SPL

Peak SPL
≥124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

1032C SAM™ Studio Monitor
Technical Specifications


System Specifications


Frequency Response

40 Hz - 20 kHz (± 2.5 dB)

Low cutoff -6dB
 33 Hz

High cutoff -6dB
 23 kHz

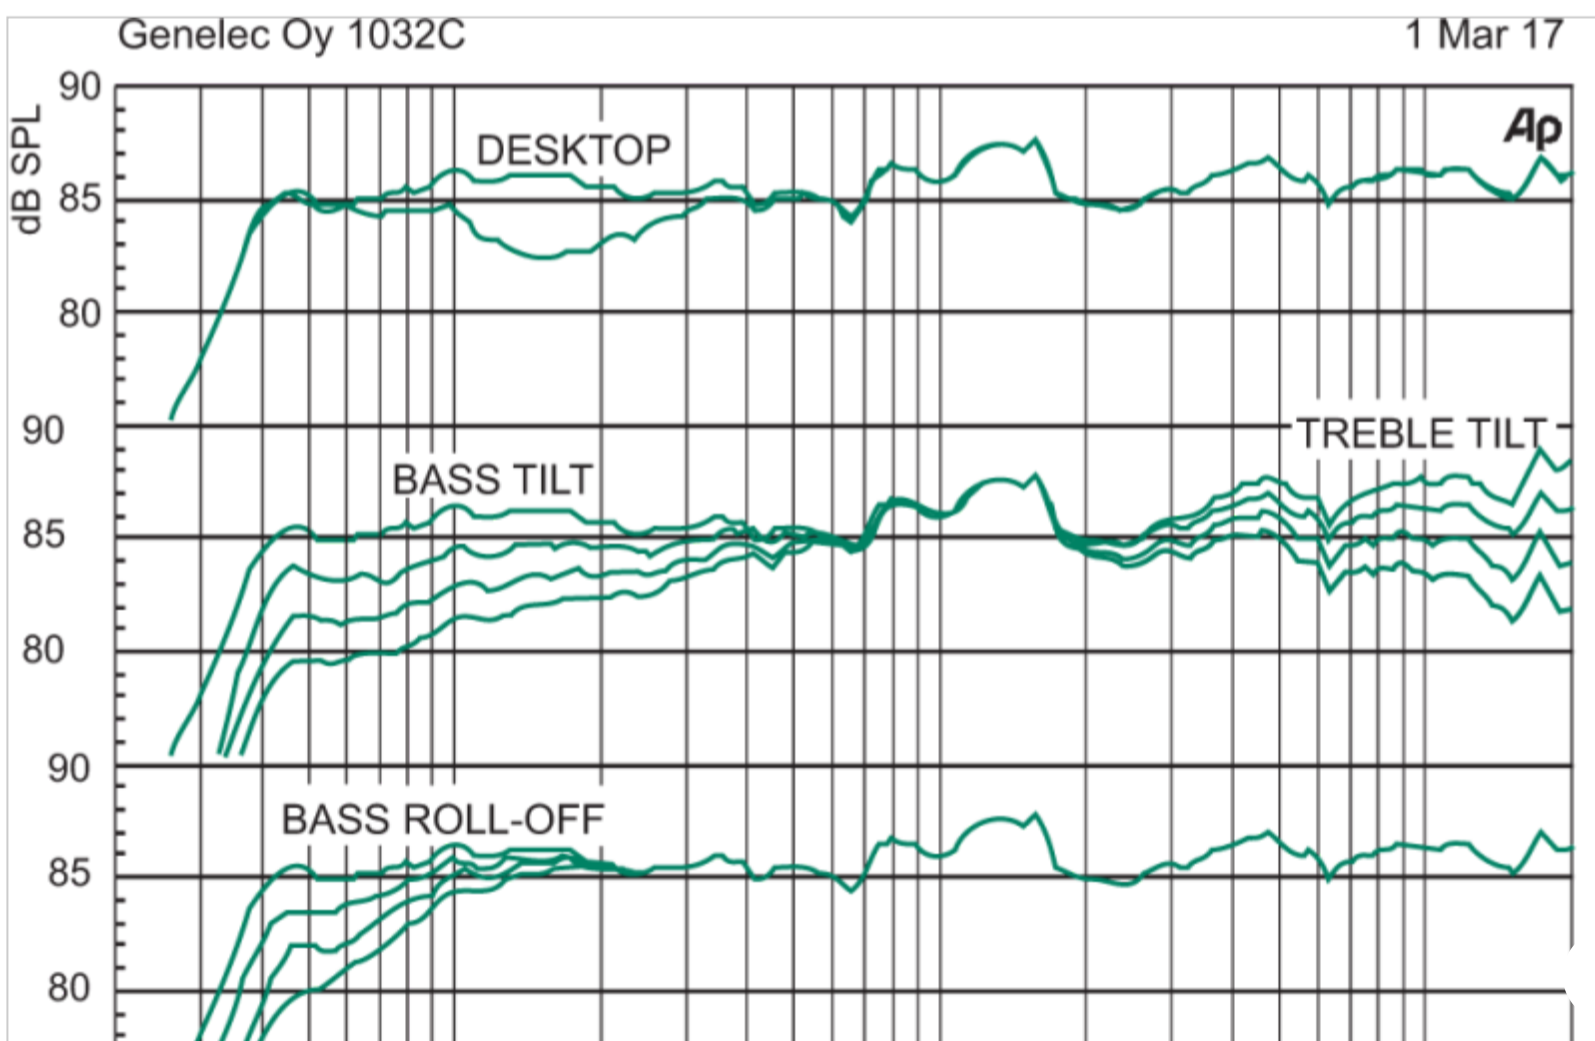

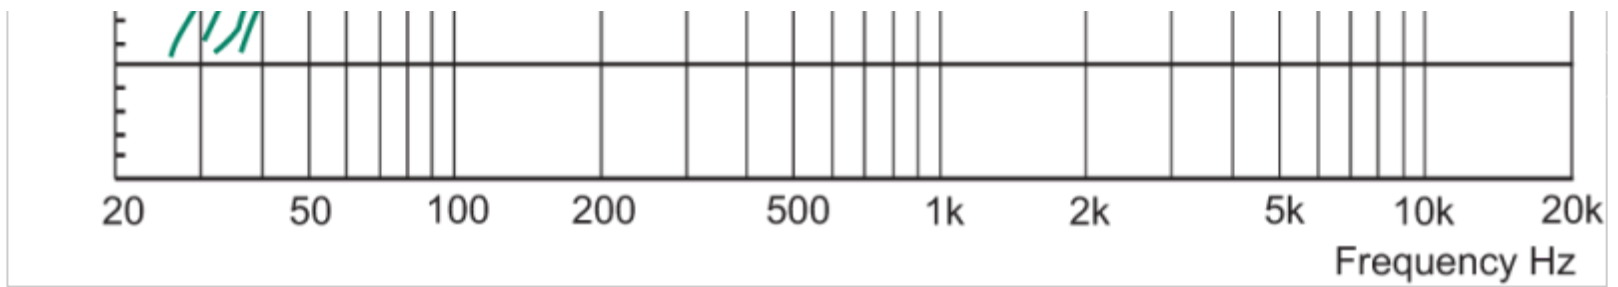

SPL

Peak SPL
 ≥ 124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
 ≥ 114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
 ≥ 104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

1032C SAM™ Studio Monitor
Technical Specifications


System Specifications


Frequency Response

40 Hz - 20 kHz (± 2.5 dB)

Low cutoff -6dB
 33 Hz

High cutoff -6dB
 23 kHz

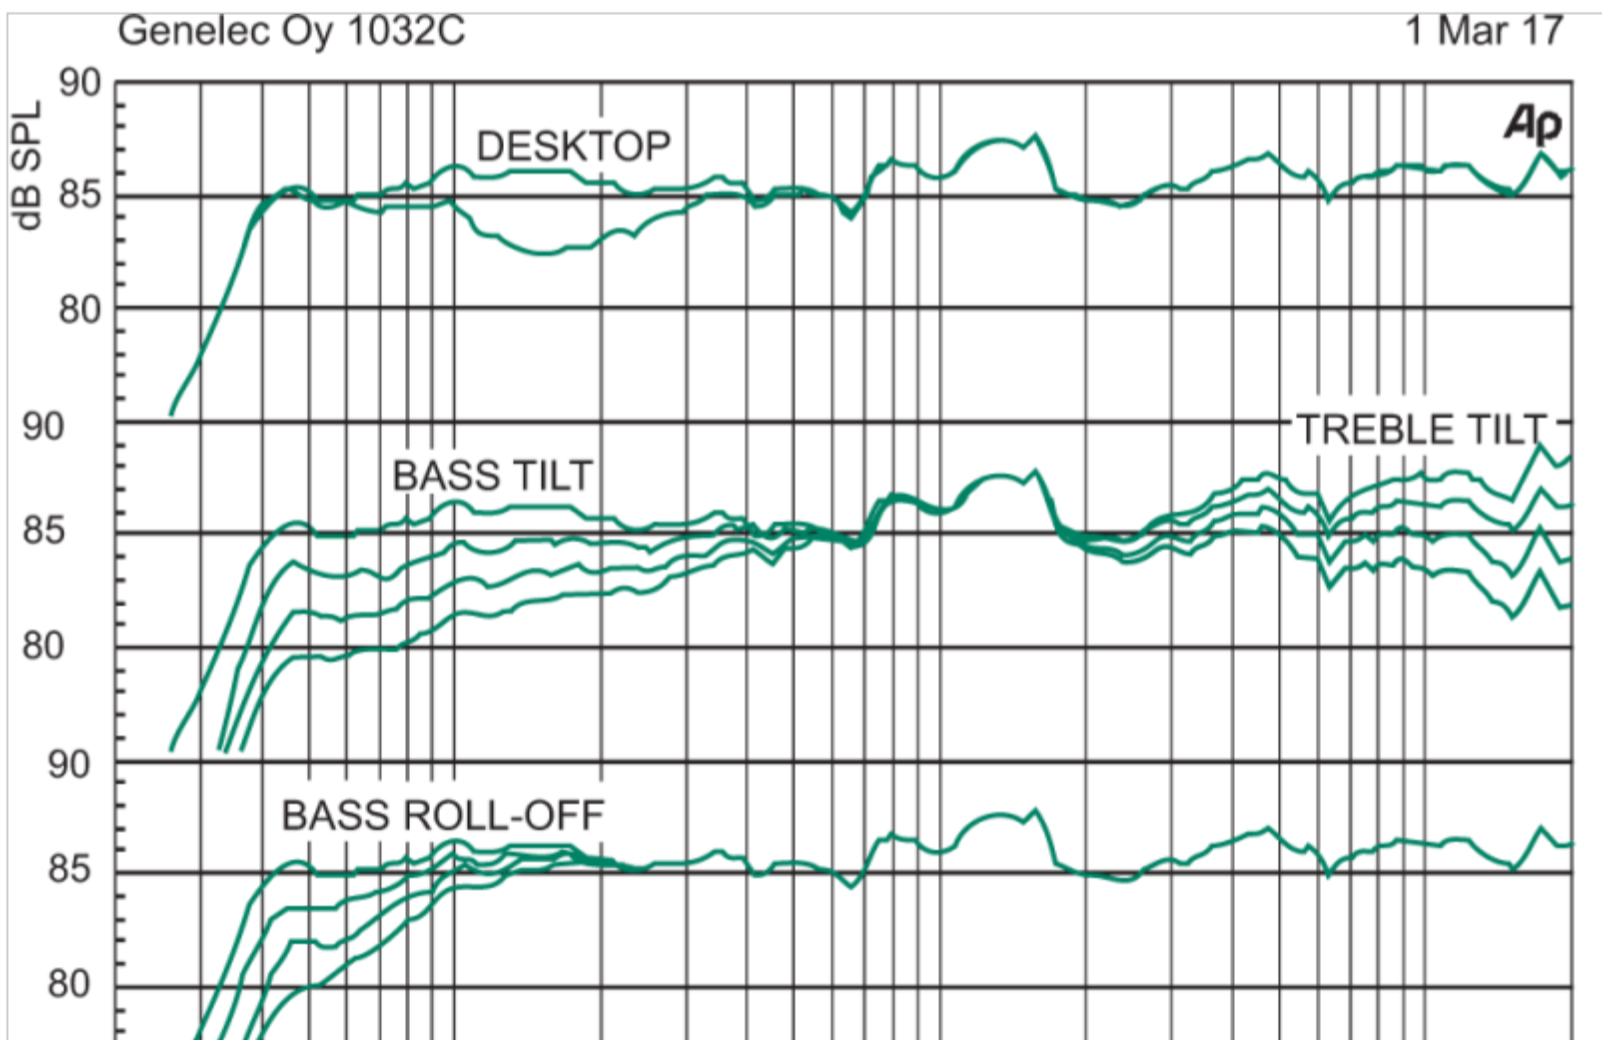

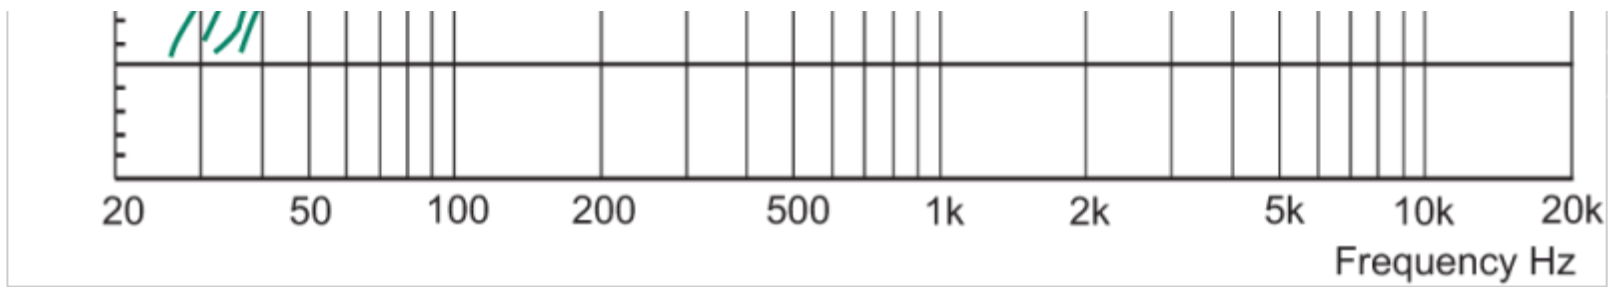

SPL

Peak SPL
 ≥ 124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
 ≥ 114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
 ≥ 104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

1032C SAM™ Studio Monitor
Technical Specifications


System Specifications


Frequency Response

40 Hz - 20 kHz (± 2.5 dB)

Low cutoff -6dB
 33 Hz

High cutoff -6dB
 23 kHz

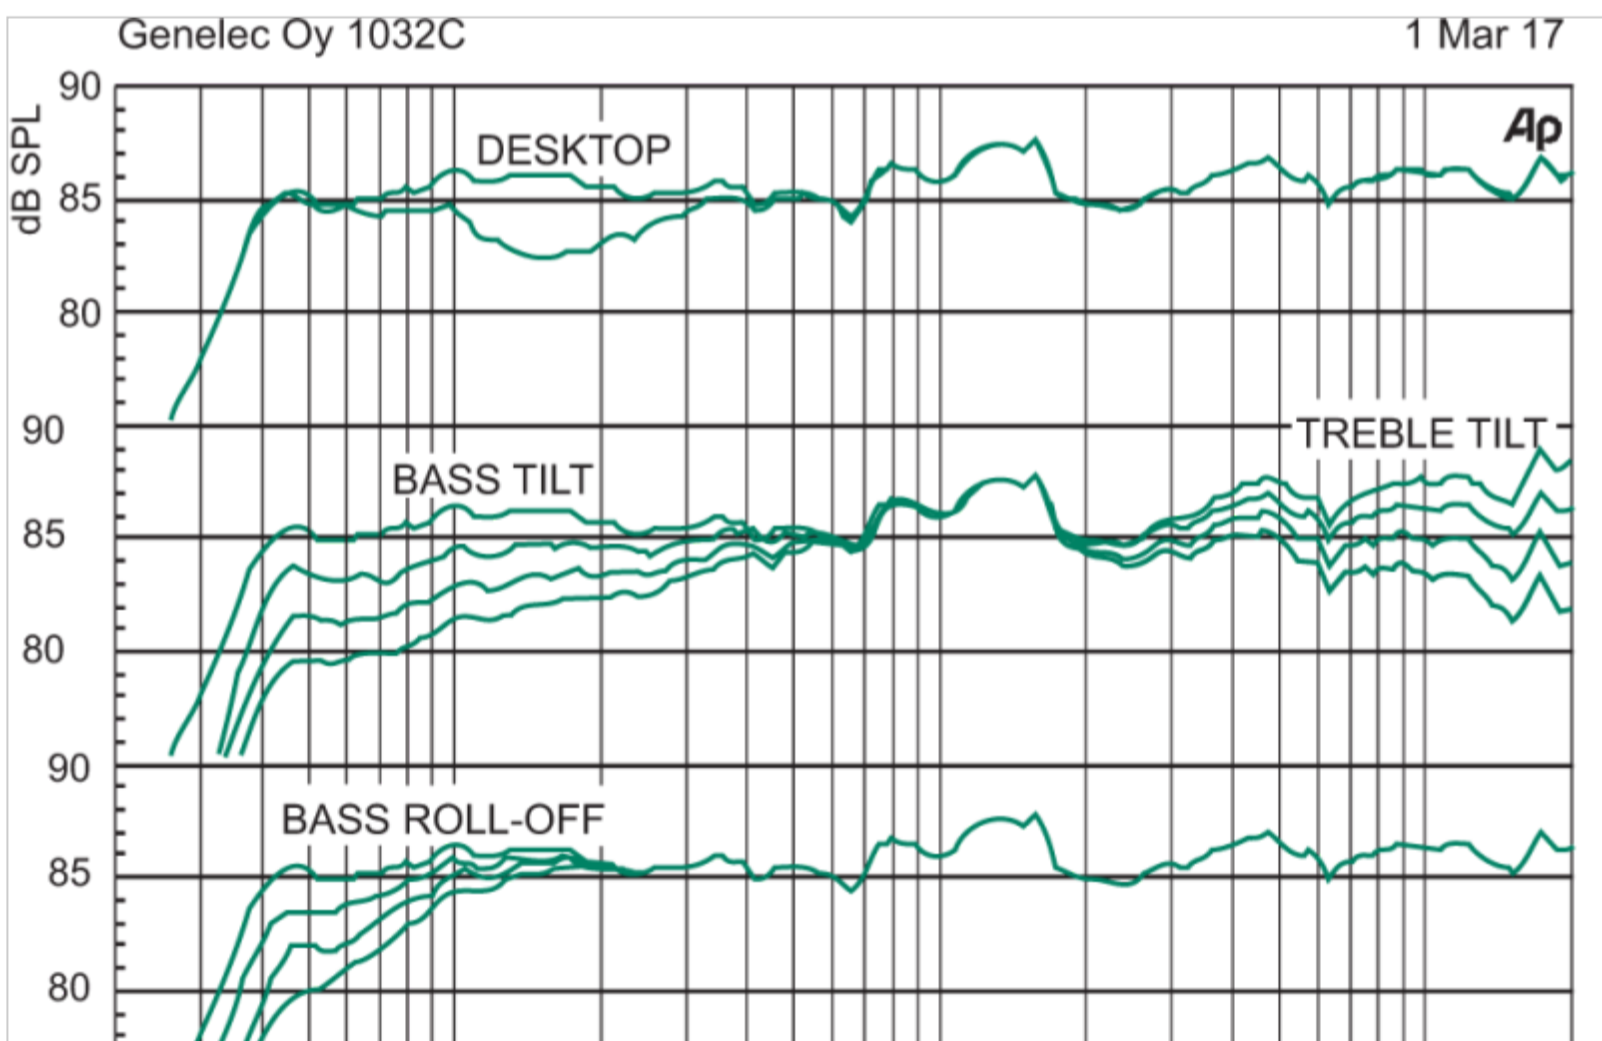

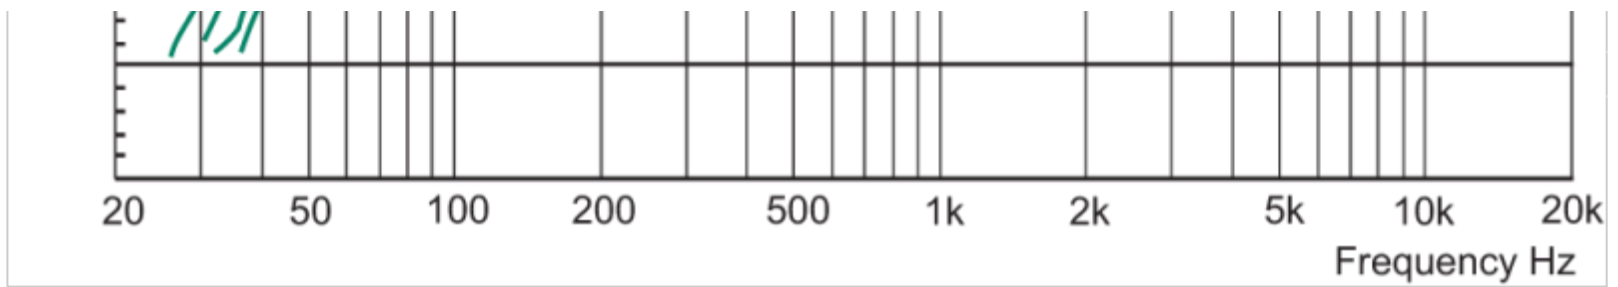

SPL

Peak SPL
 ≥ 124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
 ≥ 114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
 ≥ 104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

1032C SAM™ Studio Monitor
Technical Specifications


System Specifications


Frequency Response

40 Hz - 20 kHz (± 2.5 dB)

Low cutoff -6dB
 33 Hz

High cutoff -6dB
 23 kHz

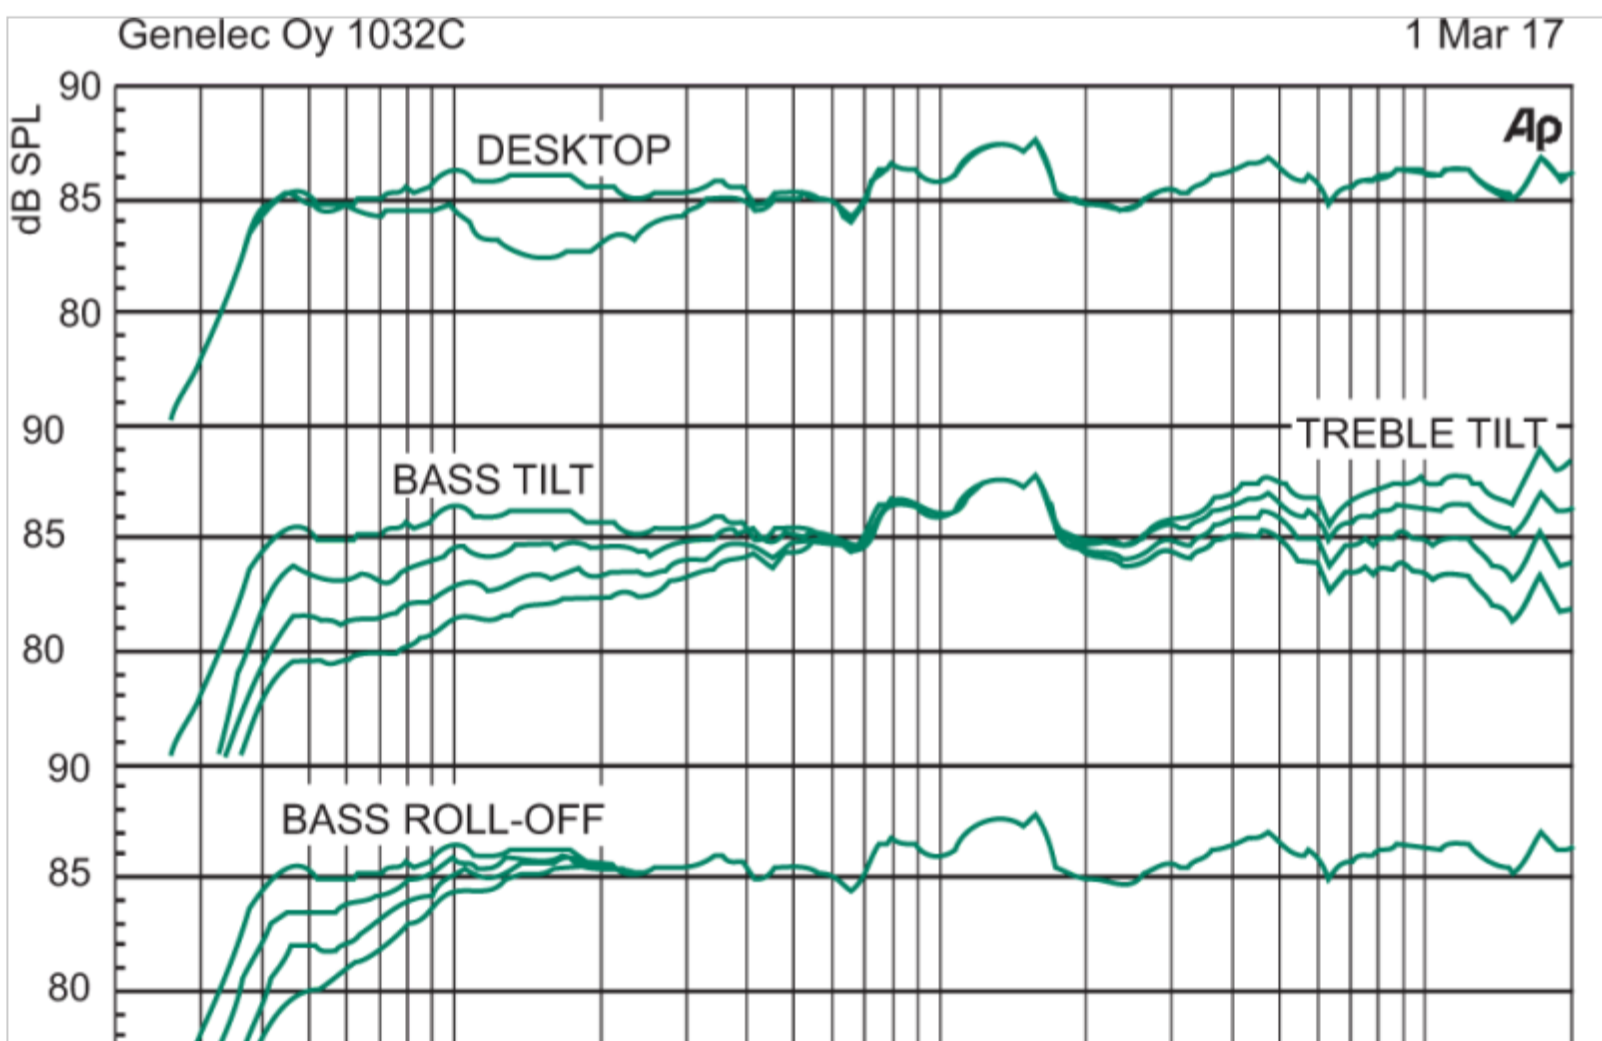

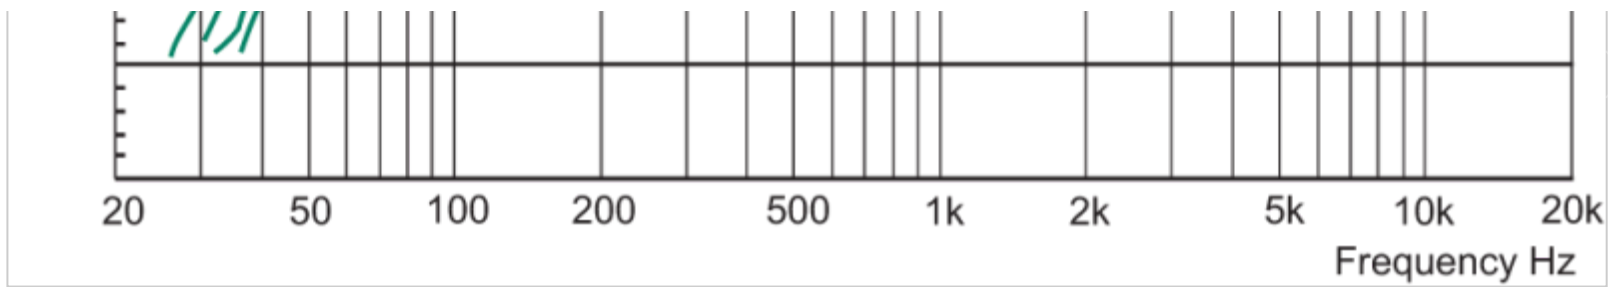

SPL

Peak SPL
 ≥ 124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
 ≥ 114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
 ≥ 104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

1032C SAM™ Studio Monitor

Technical Specifications


System Specifications


Frequency Response

40 Hz - 20 kHz (± 2.5 dB)

Low cutoff -6dB
 33 Hz

High cutoff -6dB
 23 kHz

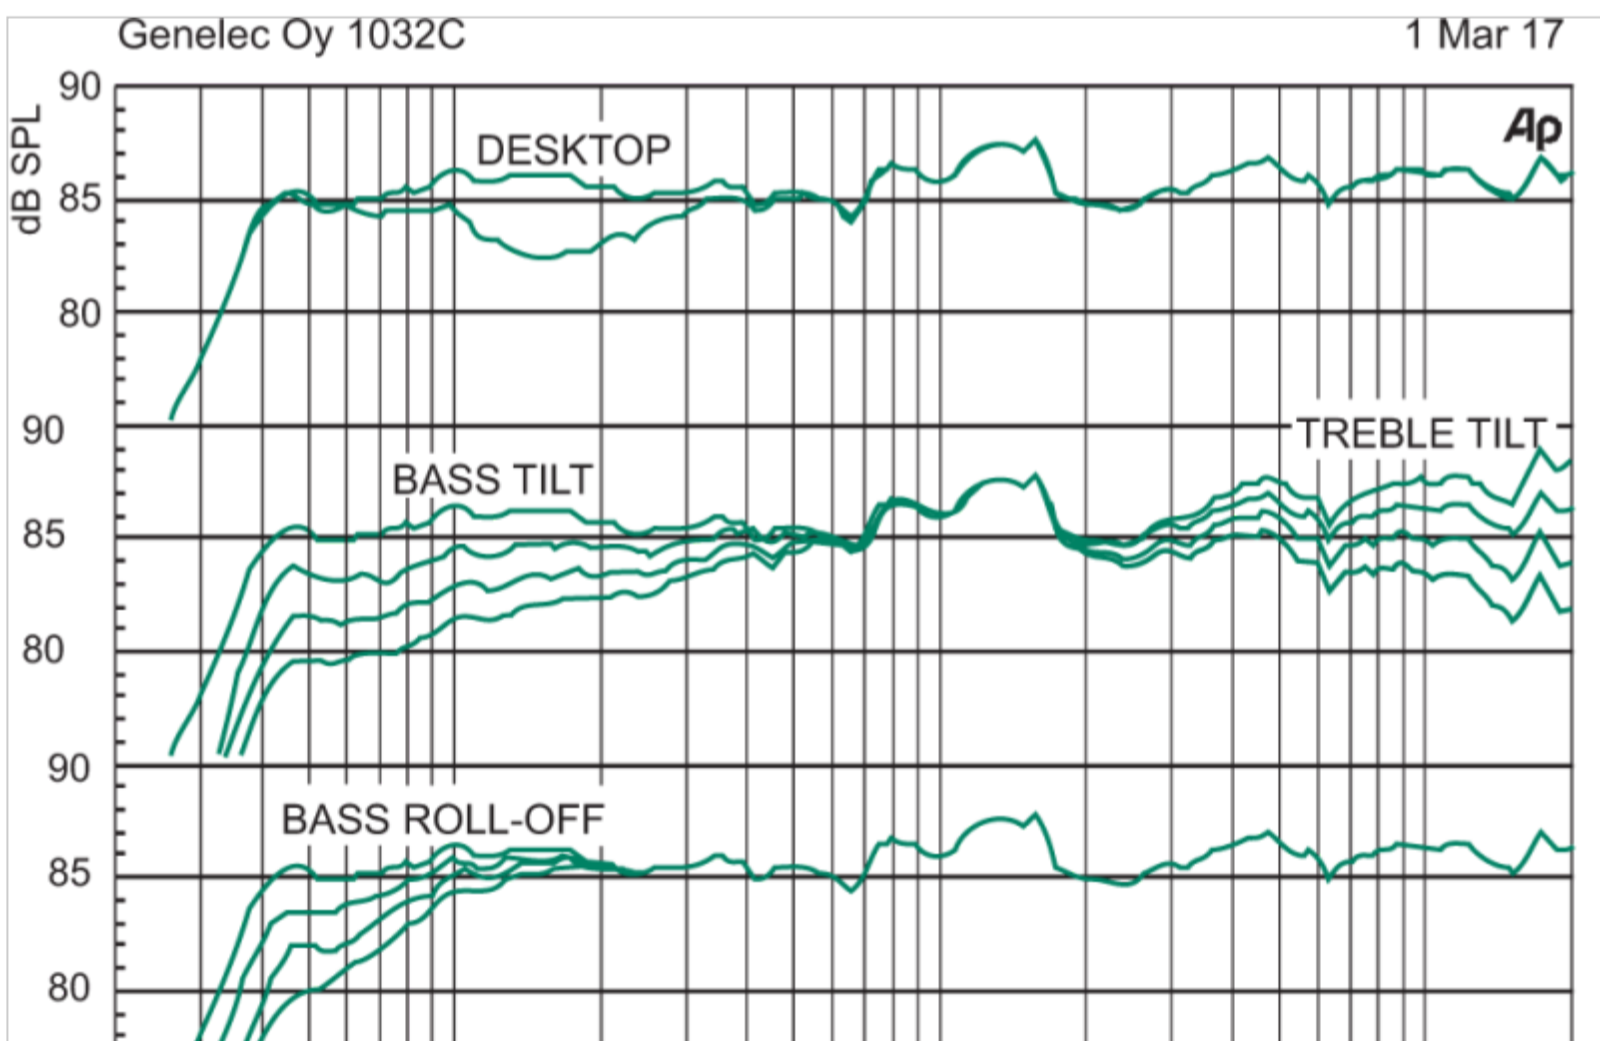

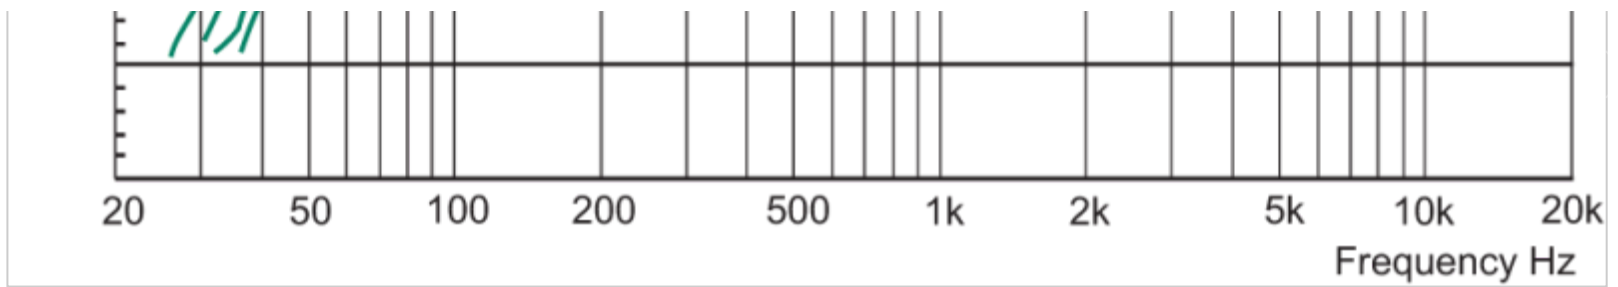

SPL

Peak SPL
≥124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

1032C SAM™ Studio Monitor
Technical Specifications


System Specifications


Frequency Response

40 Hz - 20 kHz (± 2.5 dB)

Low cutoff -6dB
 33 Hz

High cutoff -6dB
 23 kHz

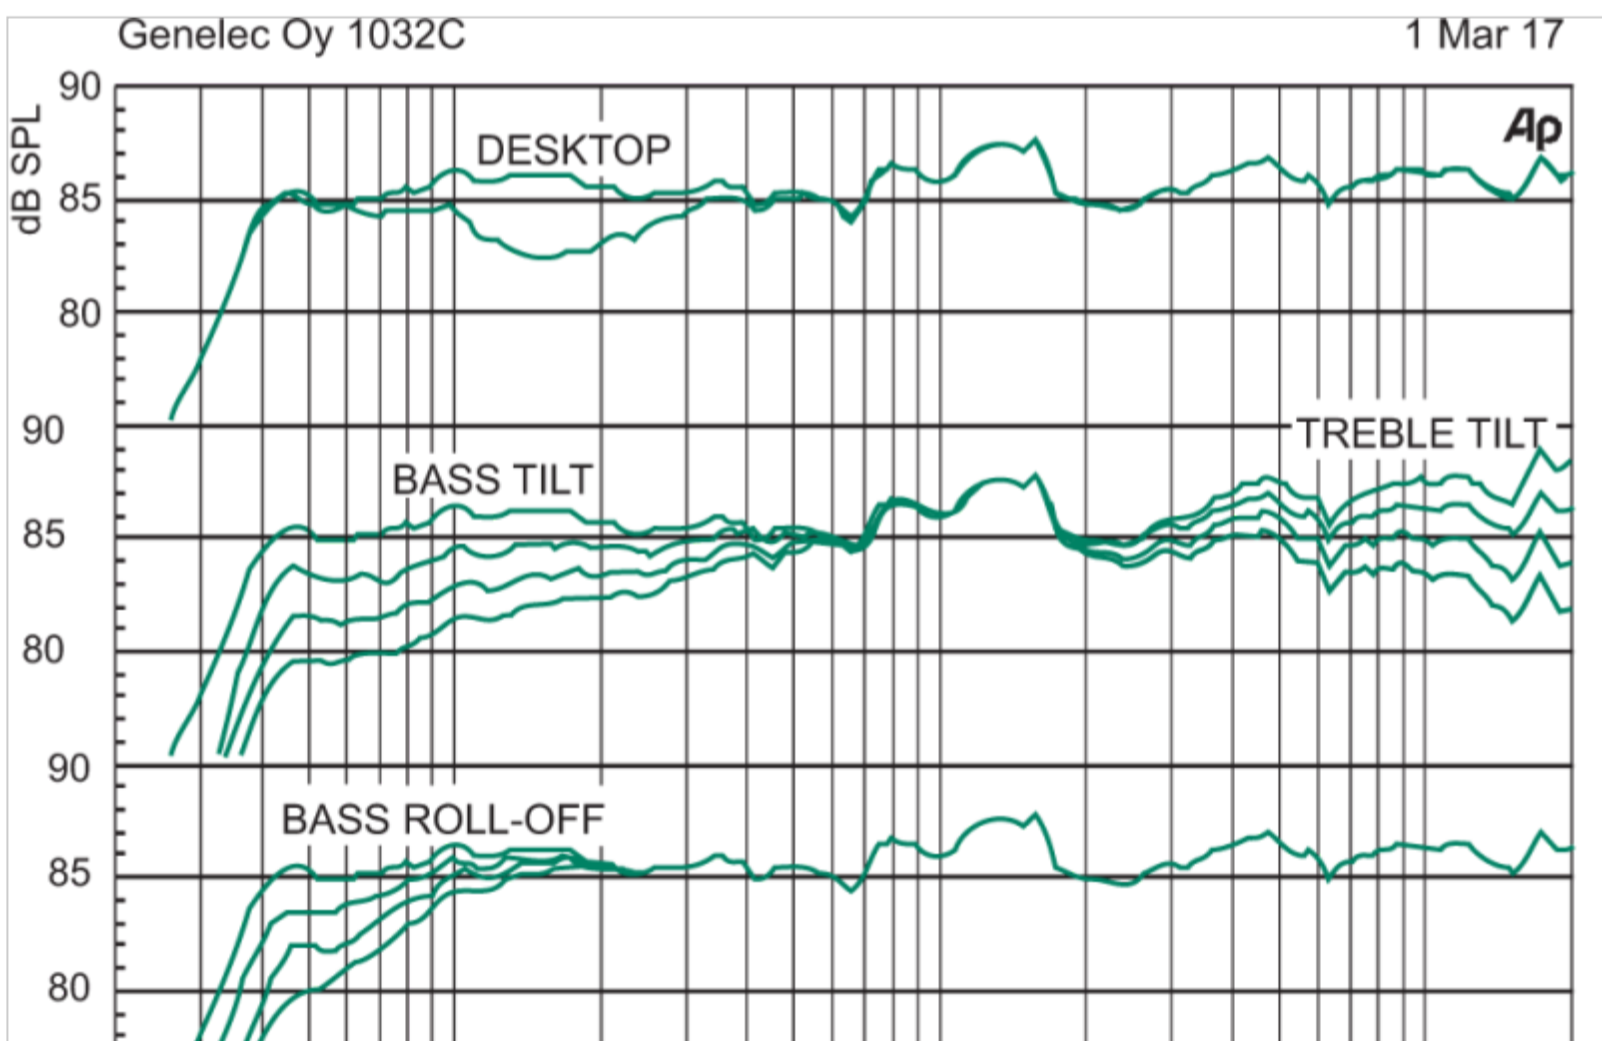

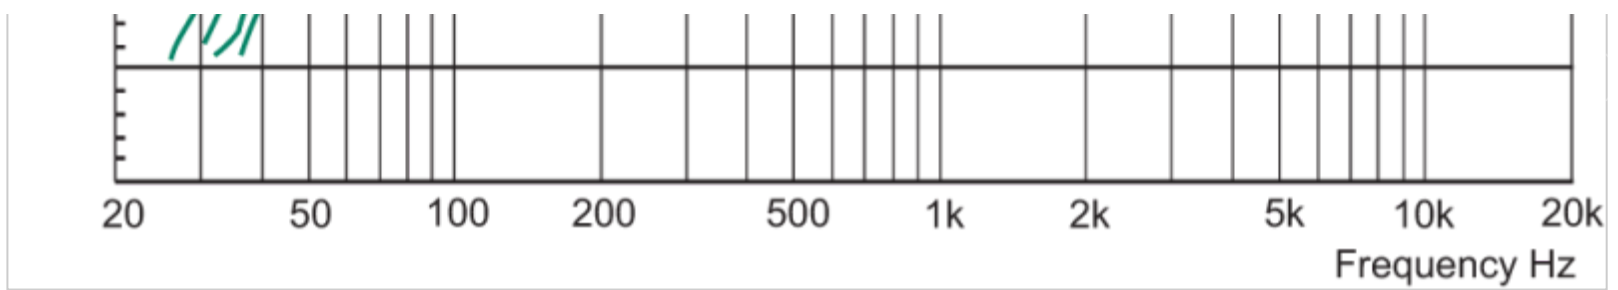

SPL

Peak SPL
≥124 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥114 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥104 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver protection circuit) at 1 m.

Self-generated noise

