

SPL

Peak SPL
≥121 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥112 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥103 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8350A SAM™ Studio Monitor

Technical Specifications


System Specifications

Frequency Response

38 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
33 Hz

High cutoff -6dB
22 kHz

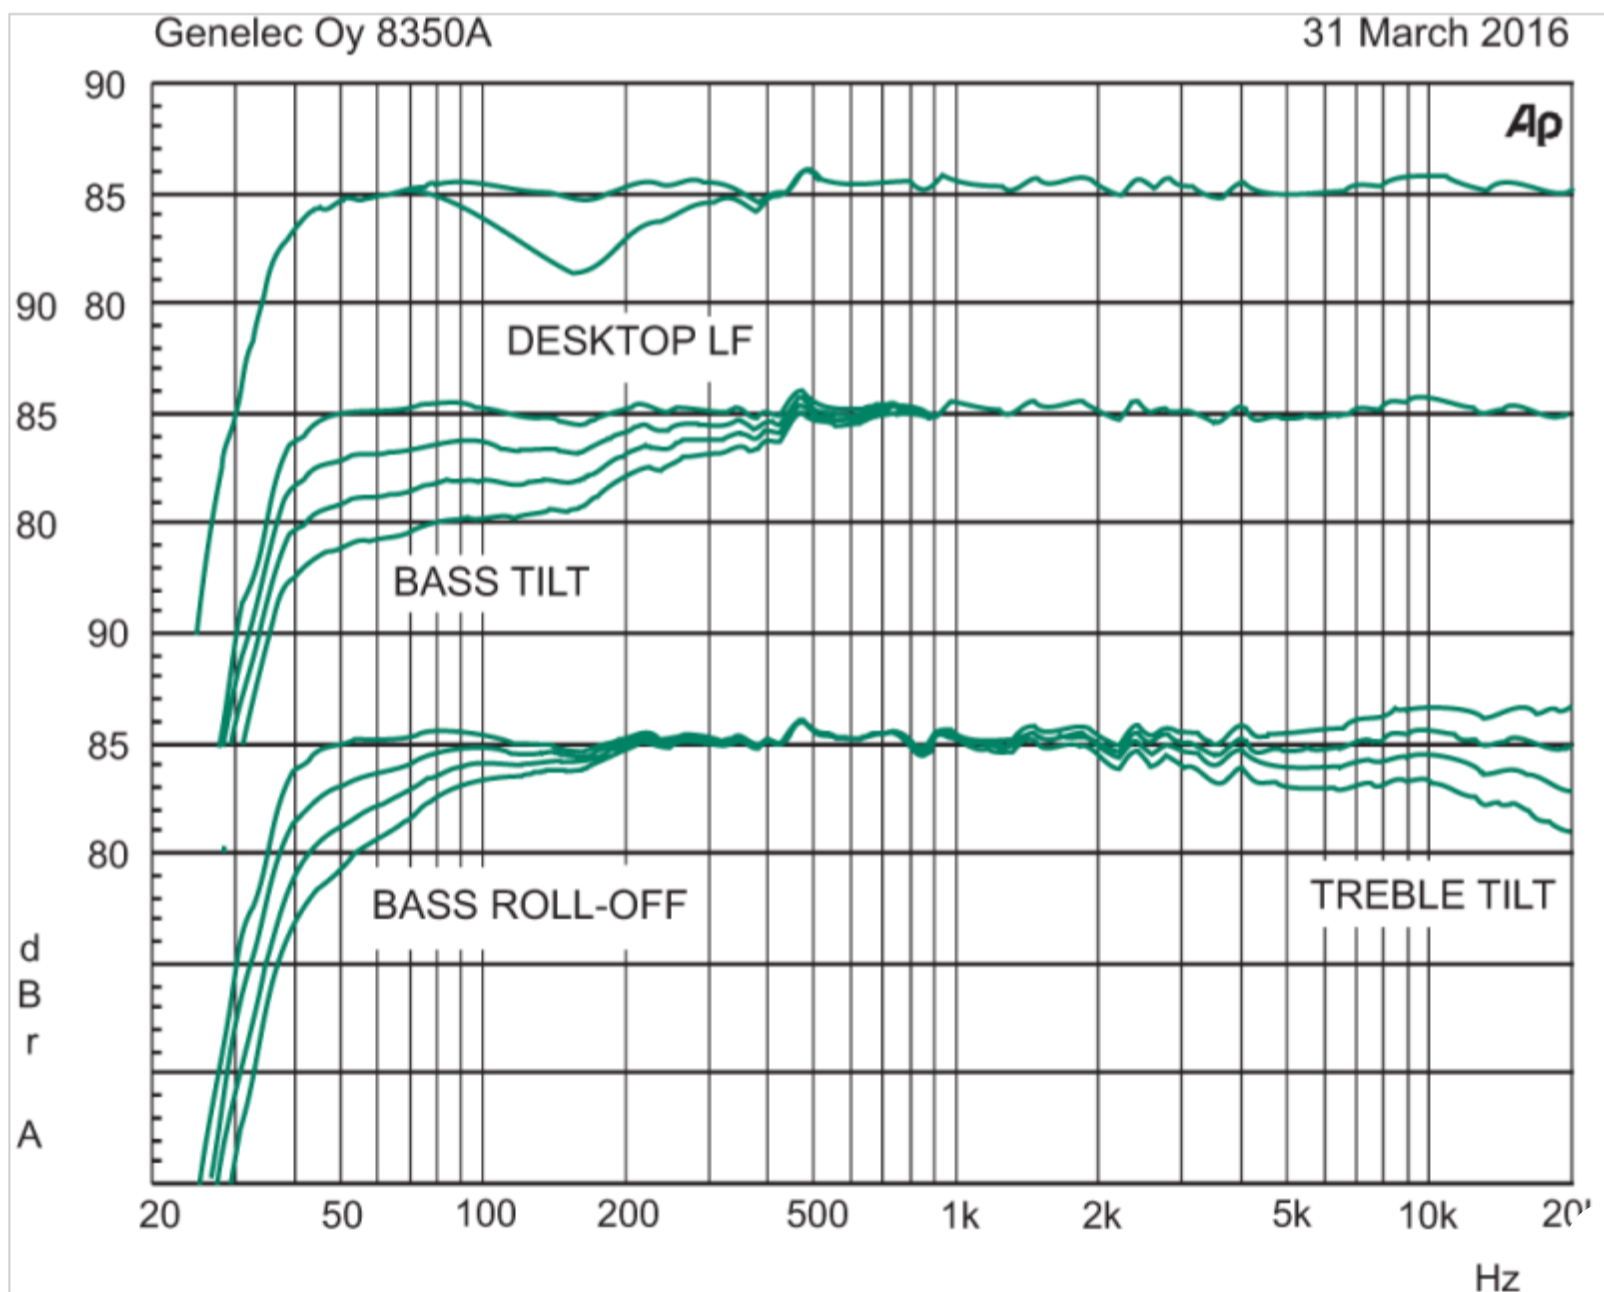

SPL

Peak SPL
≥121 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥112 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥103 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8350A SAM™ Studio Monitor

Technical Specifications


System Specifications

Frequency Response

38 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
33 Hz

High cutoff -6dB
22 kHz

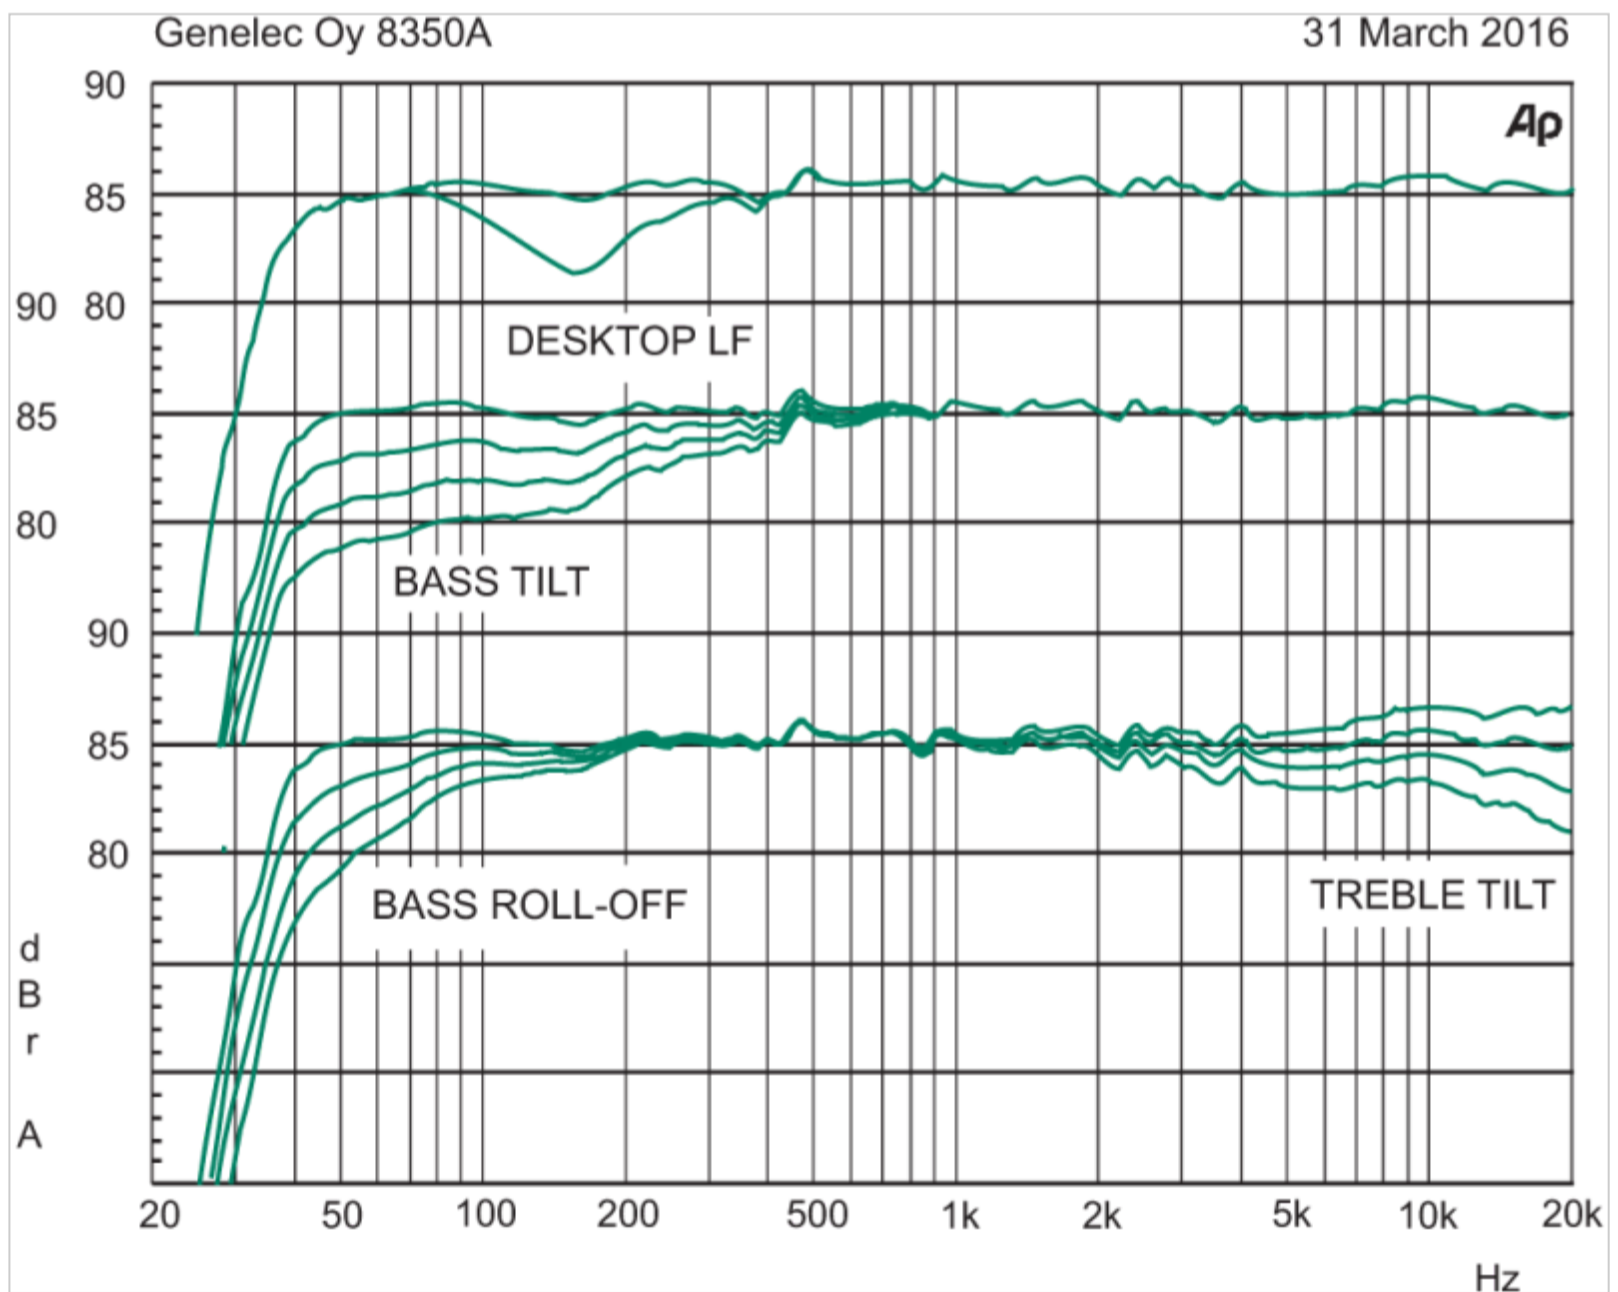

SPL

Peak SPL
≥121 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥112 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥103 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8350A SAM™ Studio Monitor

Technical Specifications


System Specifications

Frequency Response

38 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
33 Hz

High cutoff -6dB
22 kHz

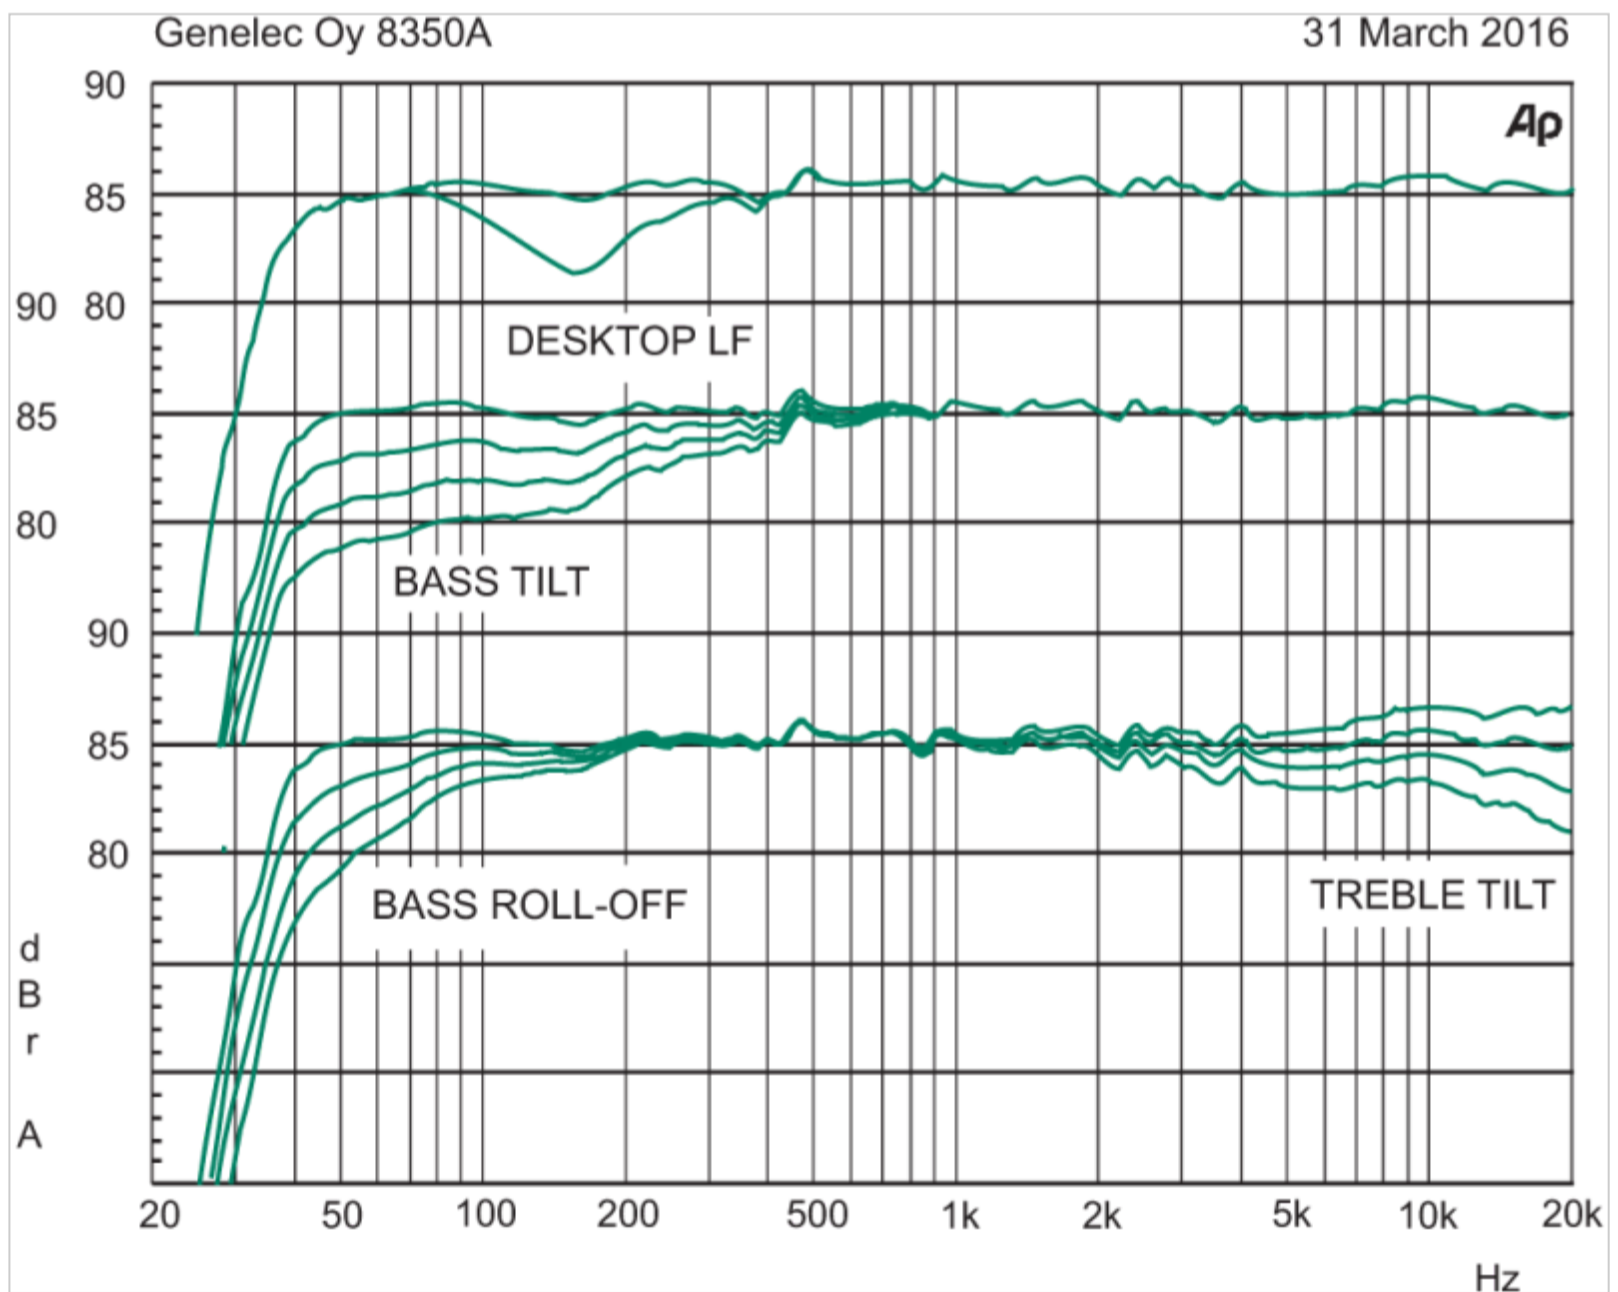

SPL

Peak SPL
≥121 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥112 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥103 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8350A SAM™ Studio Monitor

Technical Specifications


System Specifications

Frequency Response

38 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
33 Hz

High cutoff -6dB
22 kHz

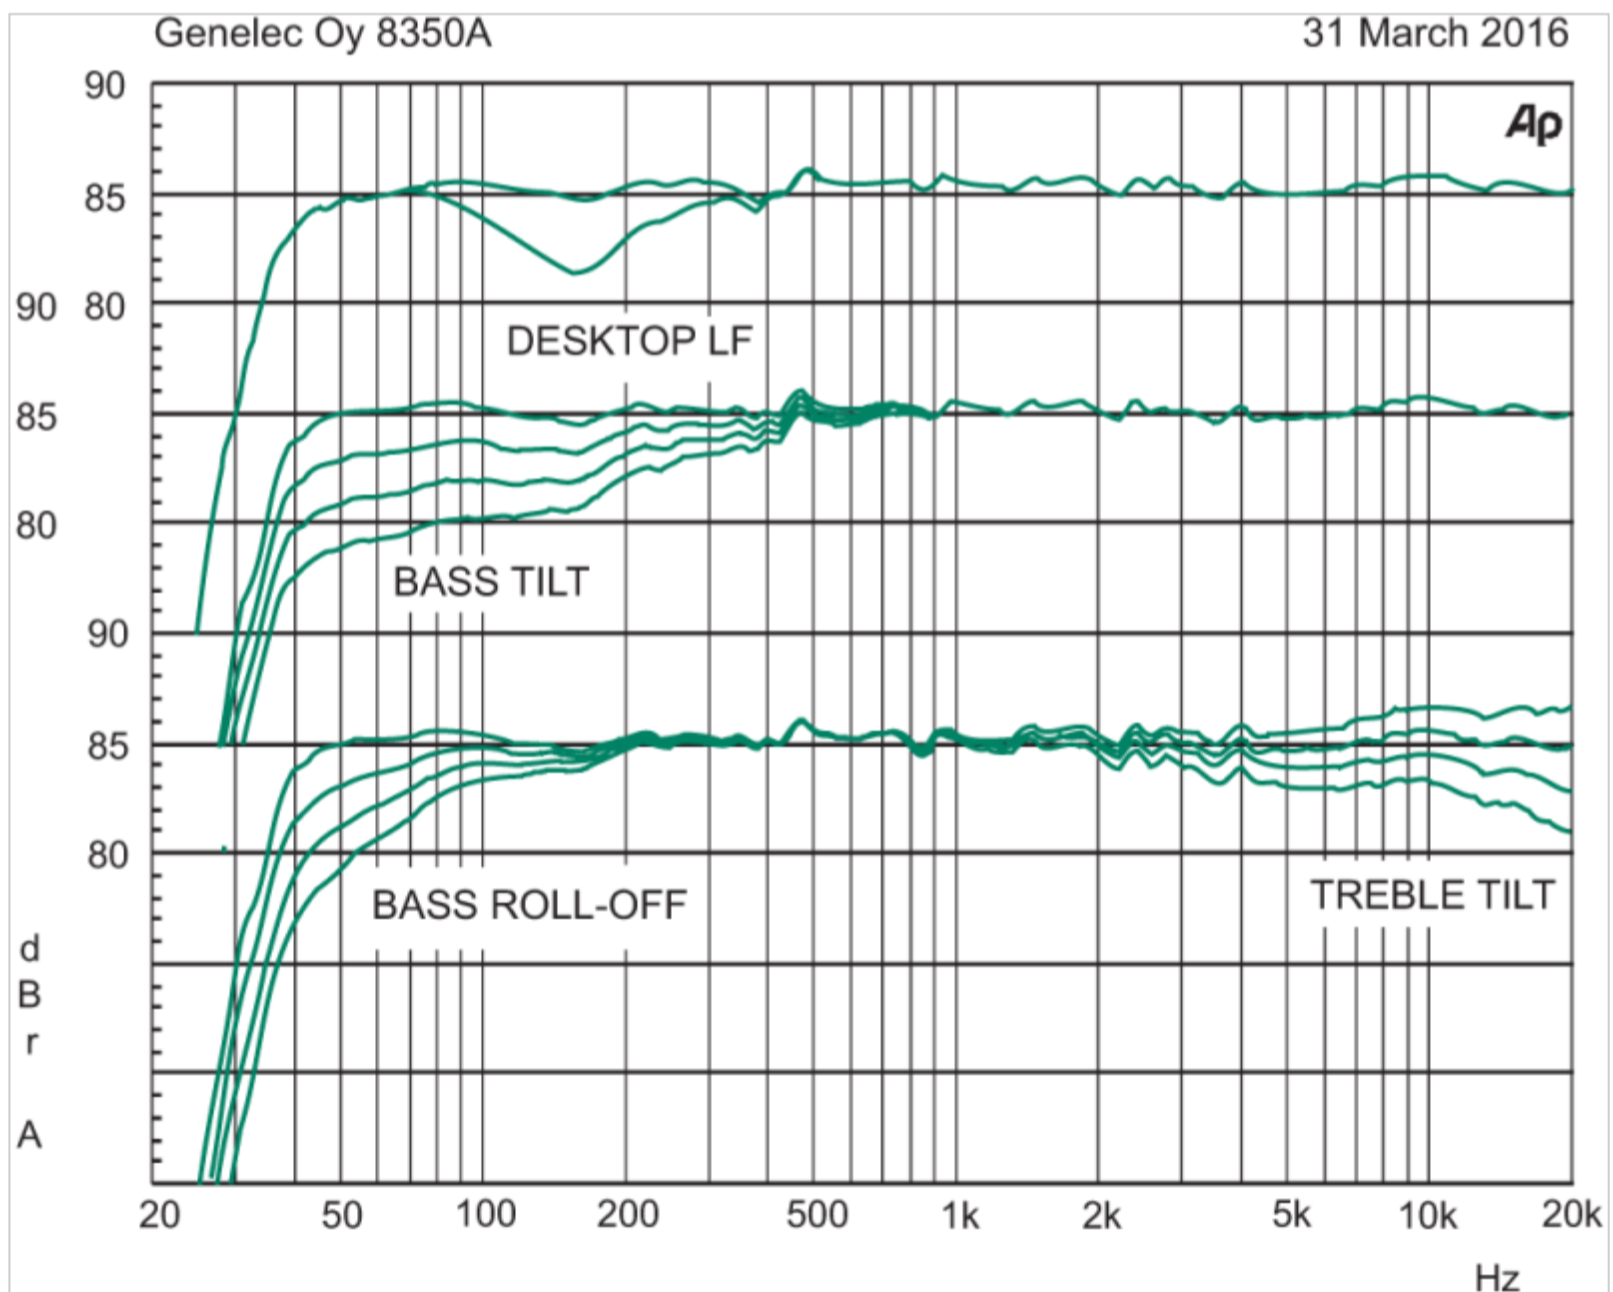

SPL

Peak SPL
≥121 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL
≥112 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL
≥103 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

Self-generated noise

Self-generated noise

8350A SAM™ Studio Monitor

Technical Specifications


System Specifications

Frequency Response

38 Hz - 20 kHz (± 1.5 dB)

Low cutoff -6dB
33 Hz

High cutoff -6dB
22 kHz

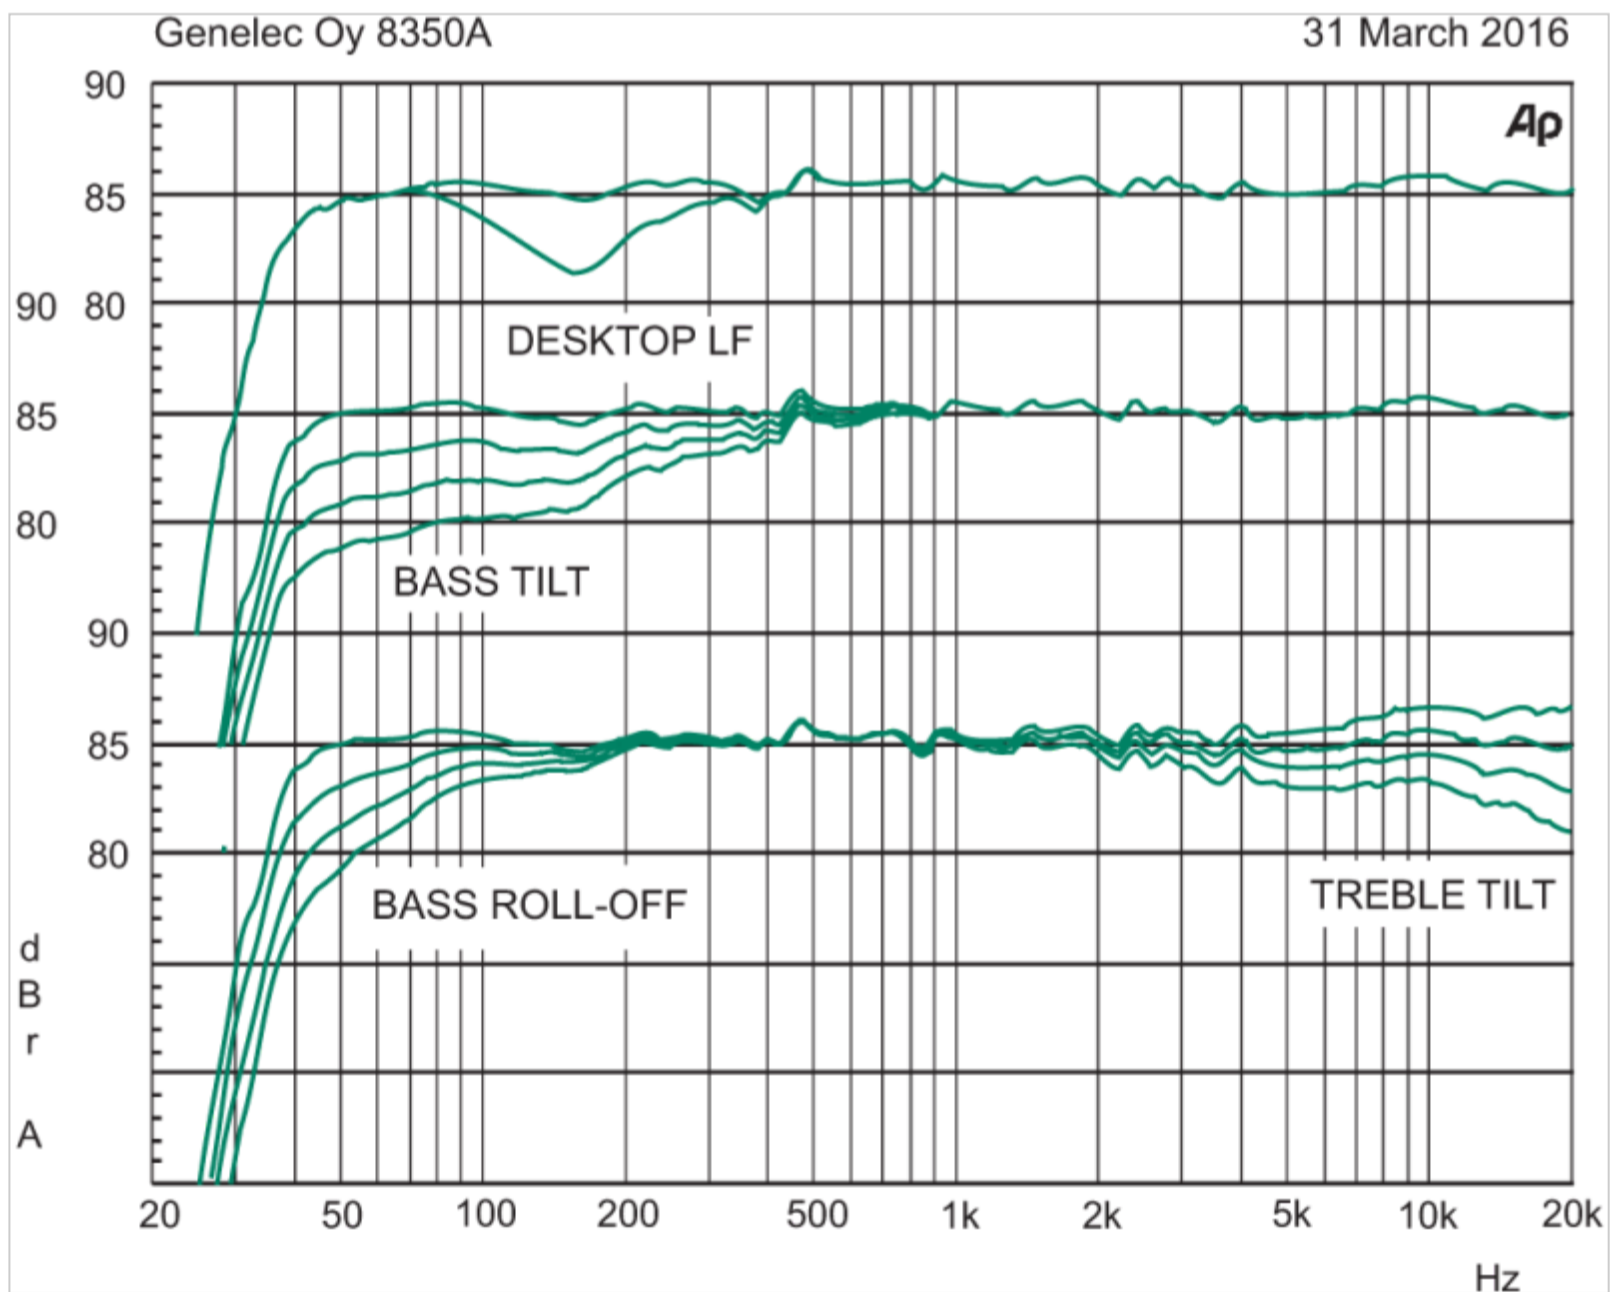

SPL

Peak SPL

≥121 dB

Maximum peak acoustic output per pair in a listening room with music material at 1 m.

Short term max SPL

≥112 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥103 dB

Maximum long term RMS acoustic output in the same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

Self-generated noise

Self-generated noise

