

Self-generated noise

Self-generated noise
 ≤ 5 dB

Self generated noise level in half space at 1 m (A-weighted).

7040A Studio Subwoofer Technical Specifications


System Specifications

Frequency Response

33 Hz - 85 Hz (± 3 dB)

Low cutoff -6dB
30 Hz

High cutoff -6dB
90 Hz

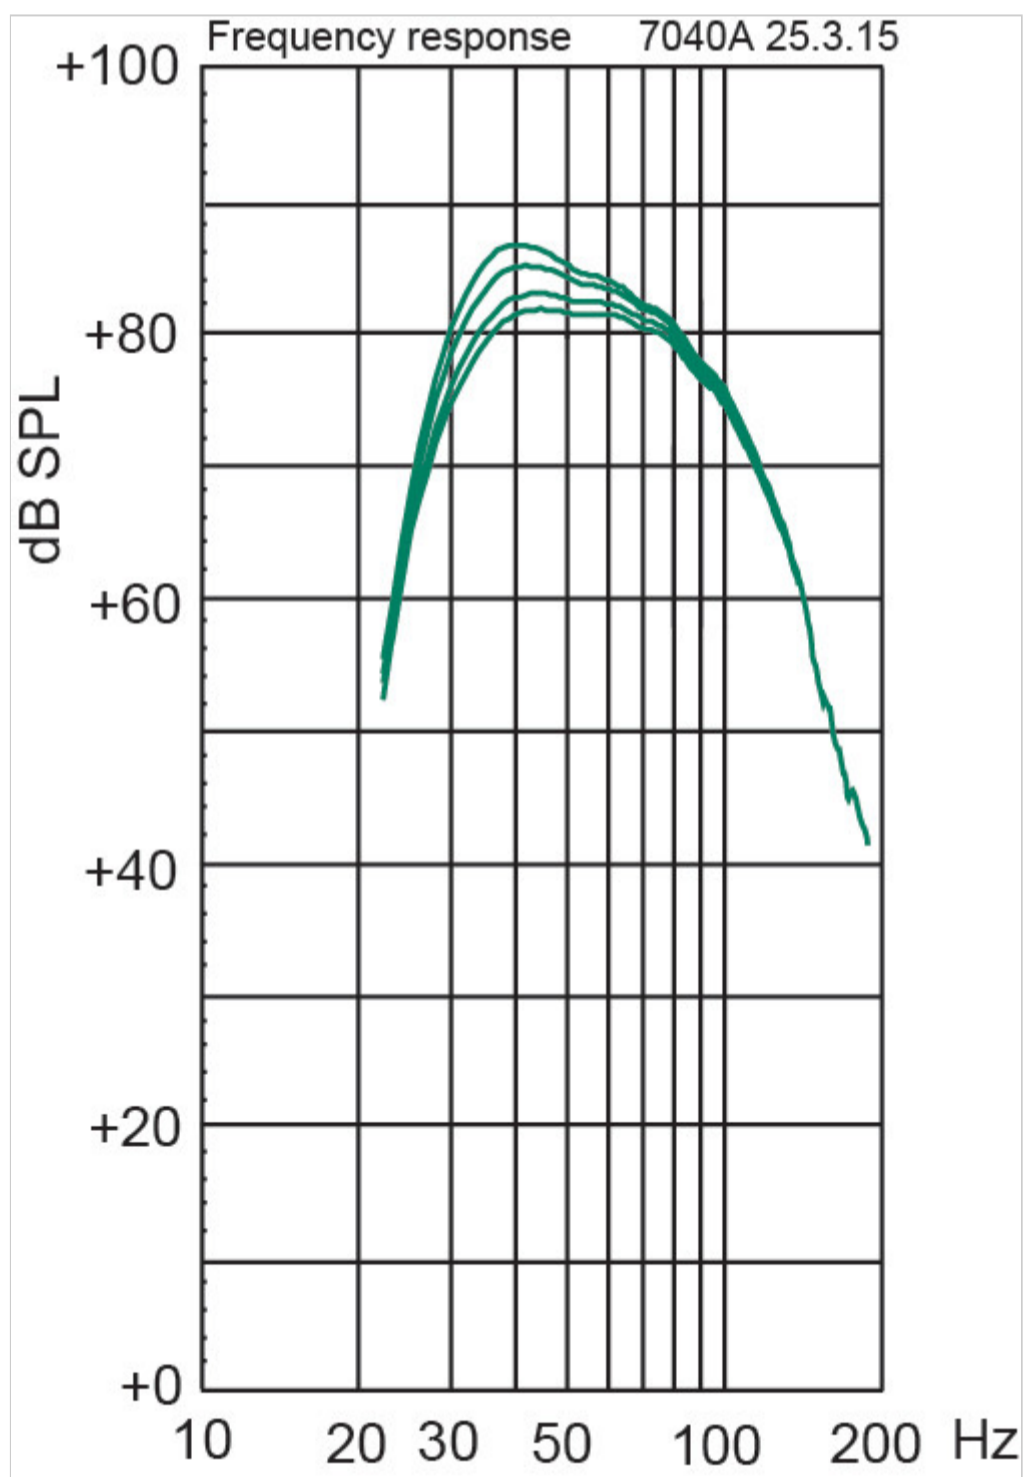

SPL

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
 ≤ 5 dB

Self generated noise level in half space at 1 m (A-weighted).

7040A Studio Subwoofer Technical Specifications


System Specifications

Frequency Response

33 Hz - 85 Hz (± 3 dB)

Low cutoff -6dB
30 Hz

High cutoff -6dB
90 Hz

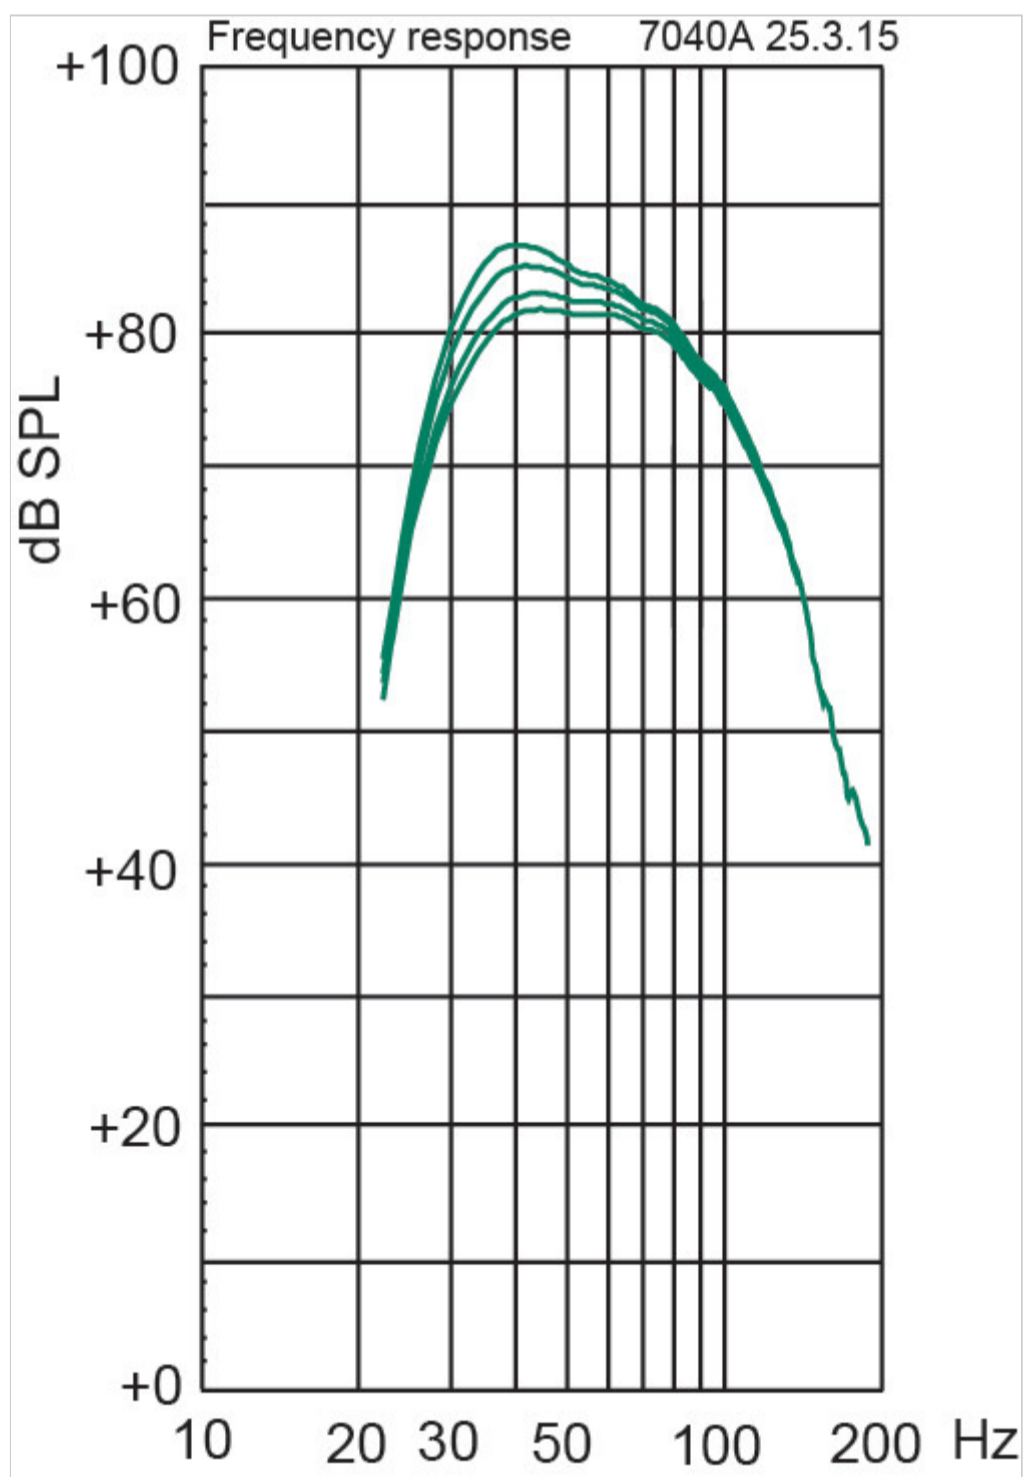

SPL

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
 ≤ 5 dB

Self generated noise level in half space at 1 m (A-weighted).

7040A Studio Subwoofer Technical Specifications


System Specifications

Frequency Response

33 Hz - 85 Hz (± 3 dB)

Low cutoff -6dB
30 Hz

High cutoff -6dB
90 Hz

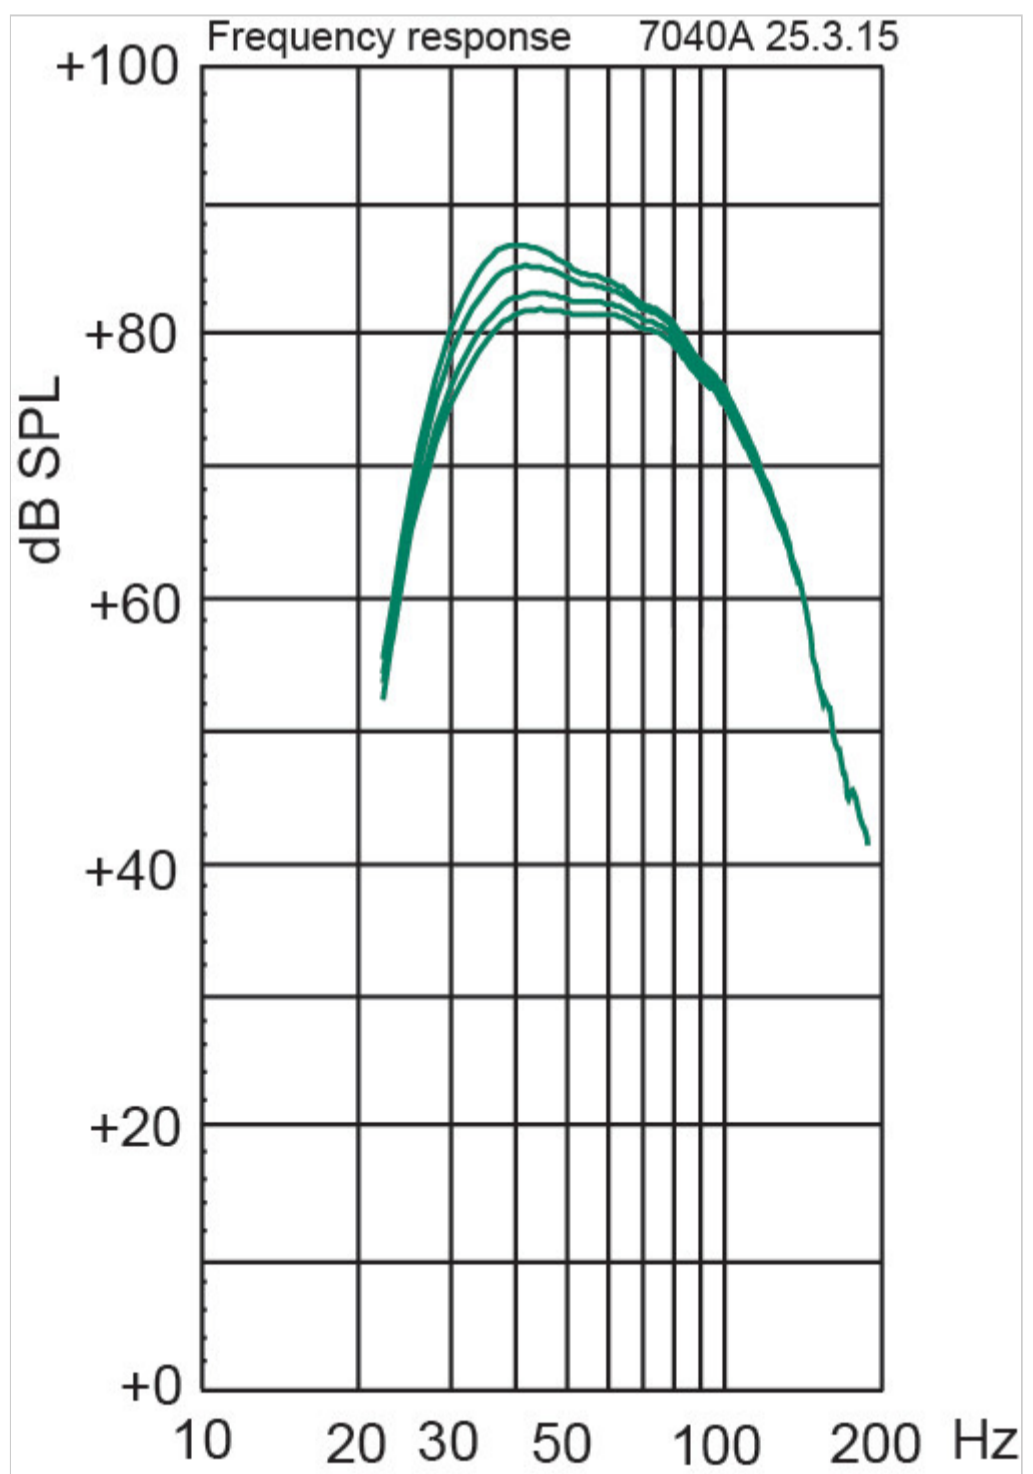

SPL

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
 ≤ 5 dB

Self generated noise level in half space at 1 m (A-weighted).

7040A Studio Subwoofer Technical Specifications


System Specifications

Frequency Response

33 Hz - 85 Hz (± 3 dB)

Low cutoff -6dB
30 Hz

High cutoff -6dB
90 Hz

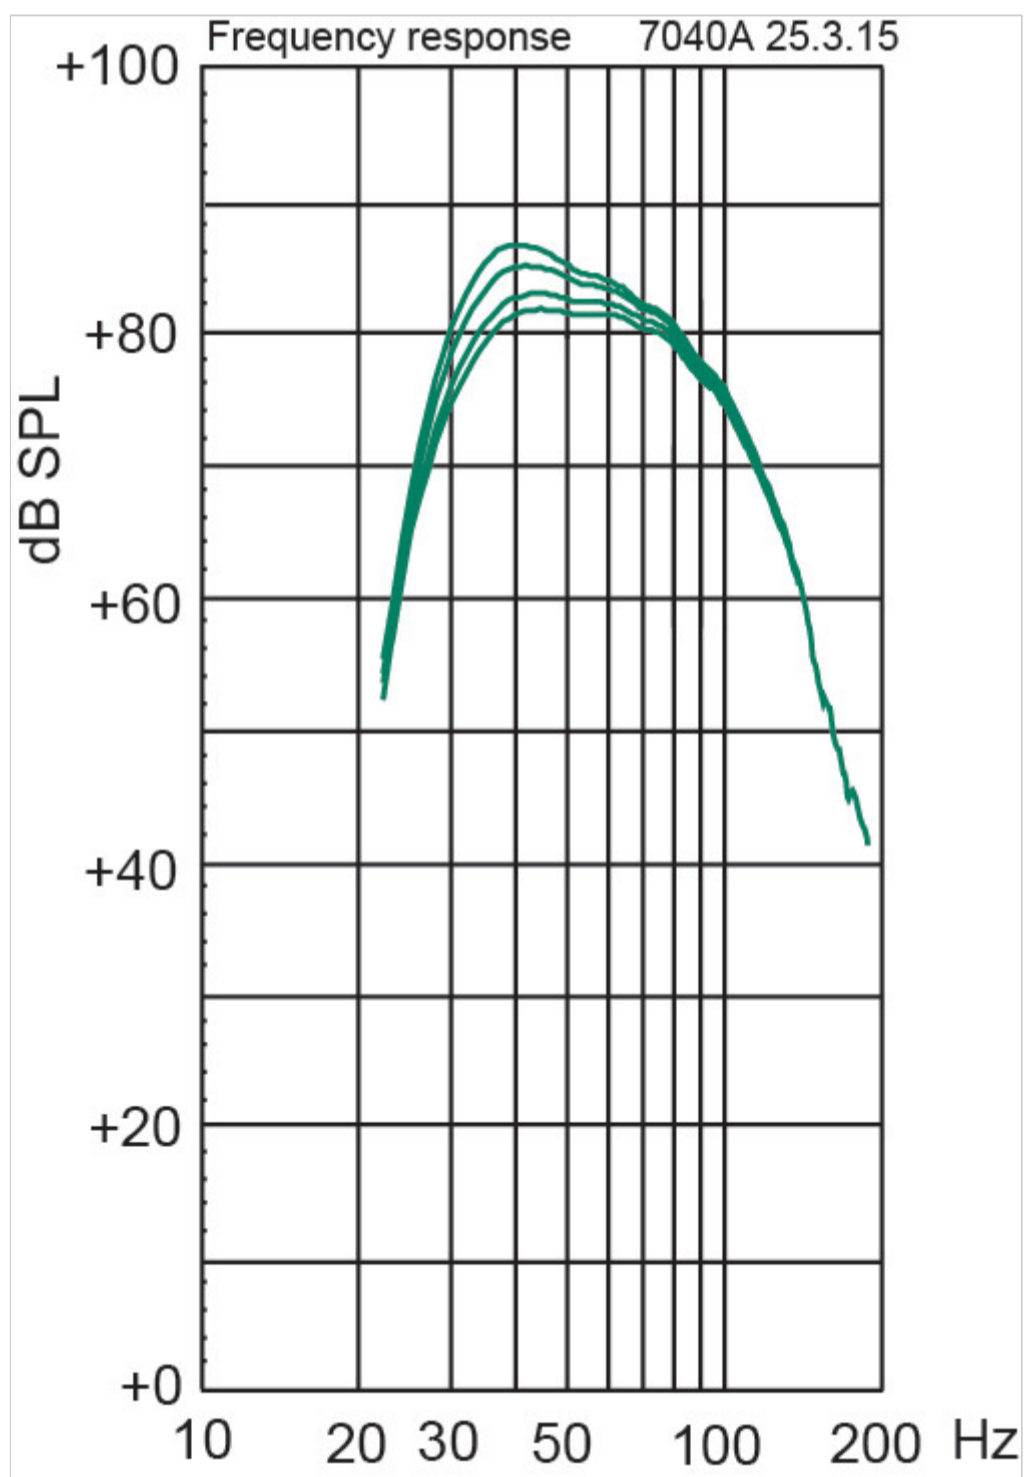

SPL

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
 ≤ 5 dB

Self generated noise level in half space at 1 m (A-weighted).

7040A Studio Subwoofer Technical Specifications


System Specifications

Frequency Response

33 Hz - 85 Hz (± 3 dB)

Low cutoff -6dB
30 Hz

High cutoff -6dB
90 Hz

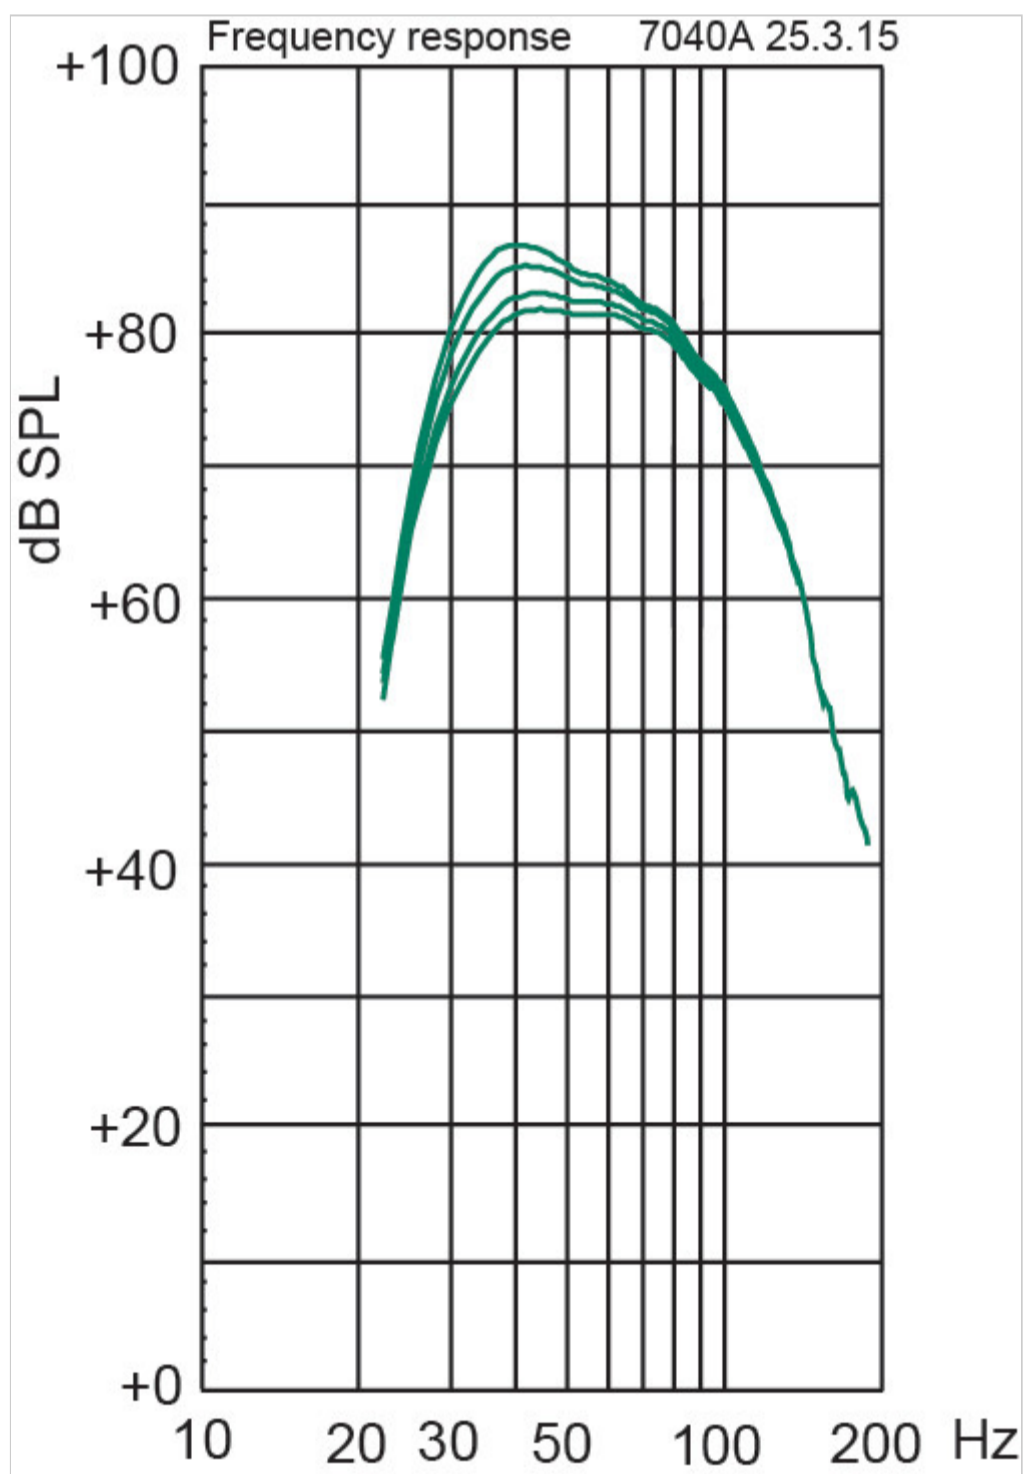

SPL

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise
 ≤ 5 dB

Self generated noise level in half space at 1 m (A-weighted).

7040A Studio Subwoofer Technical Specifications


System Specifications

Frequency Response

33 Hz - 85 Hz (± 3 dB)

Low cutoff -6dB
30 Hz

High cutoff -6dB
90 Hz

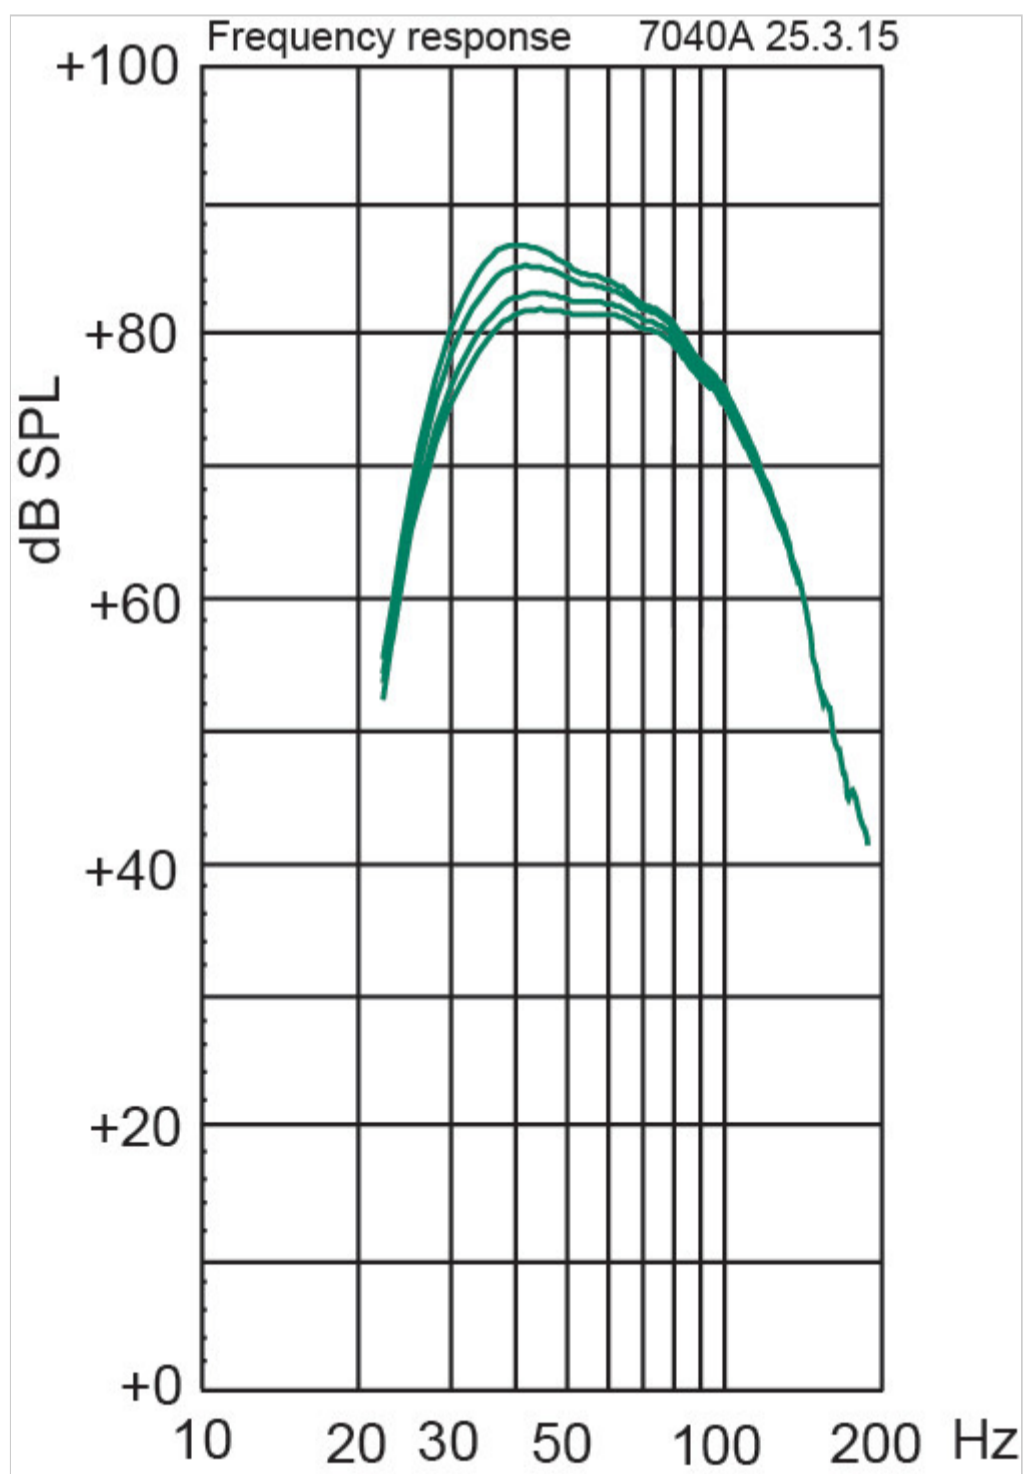

SPL

Short term max SPL
 ≥ 100 dB

Maximum short term sine wave SPL output averaged from 40 to 85 Hz, measured in half space at 1 meter.

Self-generated noise

Self-generated noise

≤5 dB

Self generated noise level in half space at 1 m (A-weighted).