

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

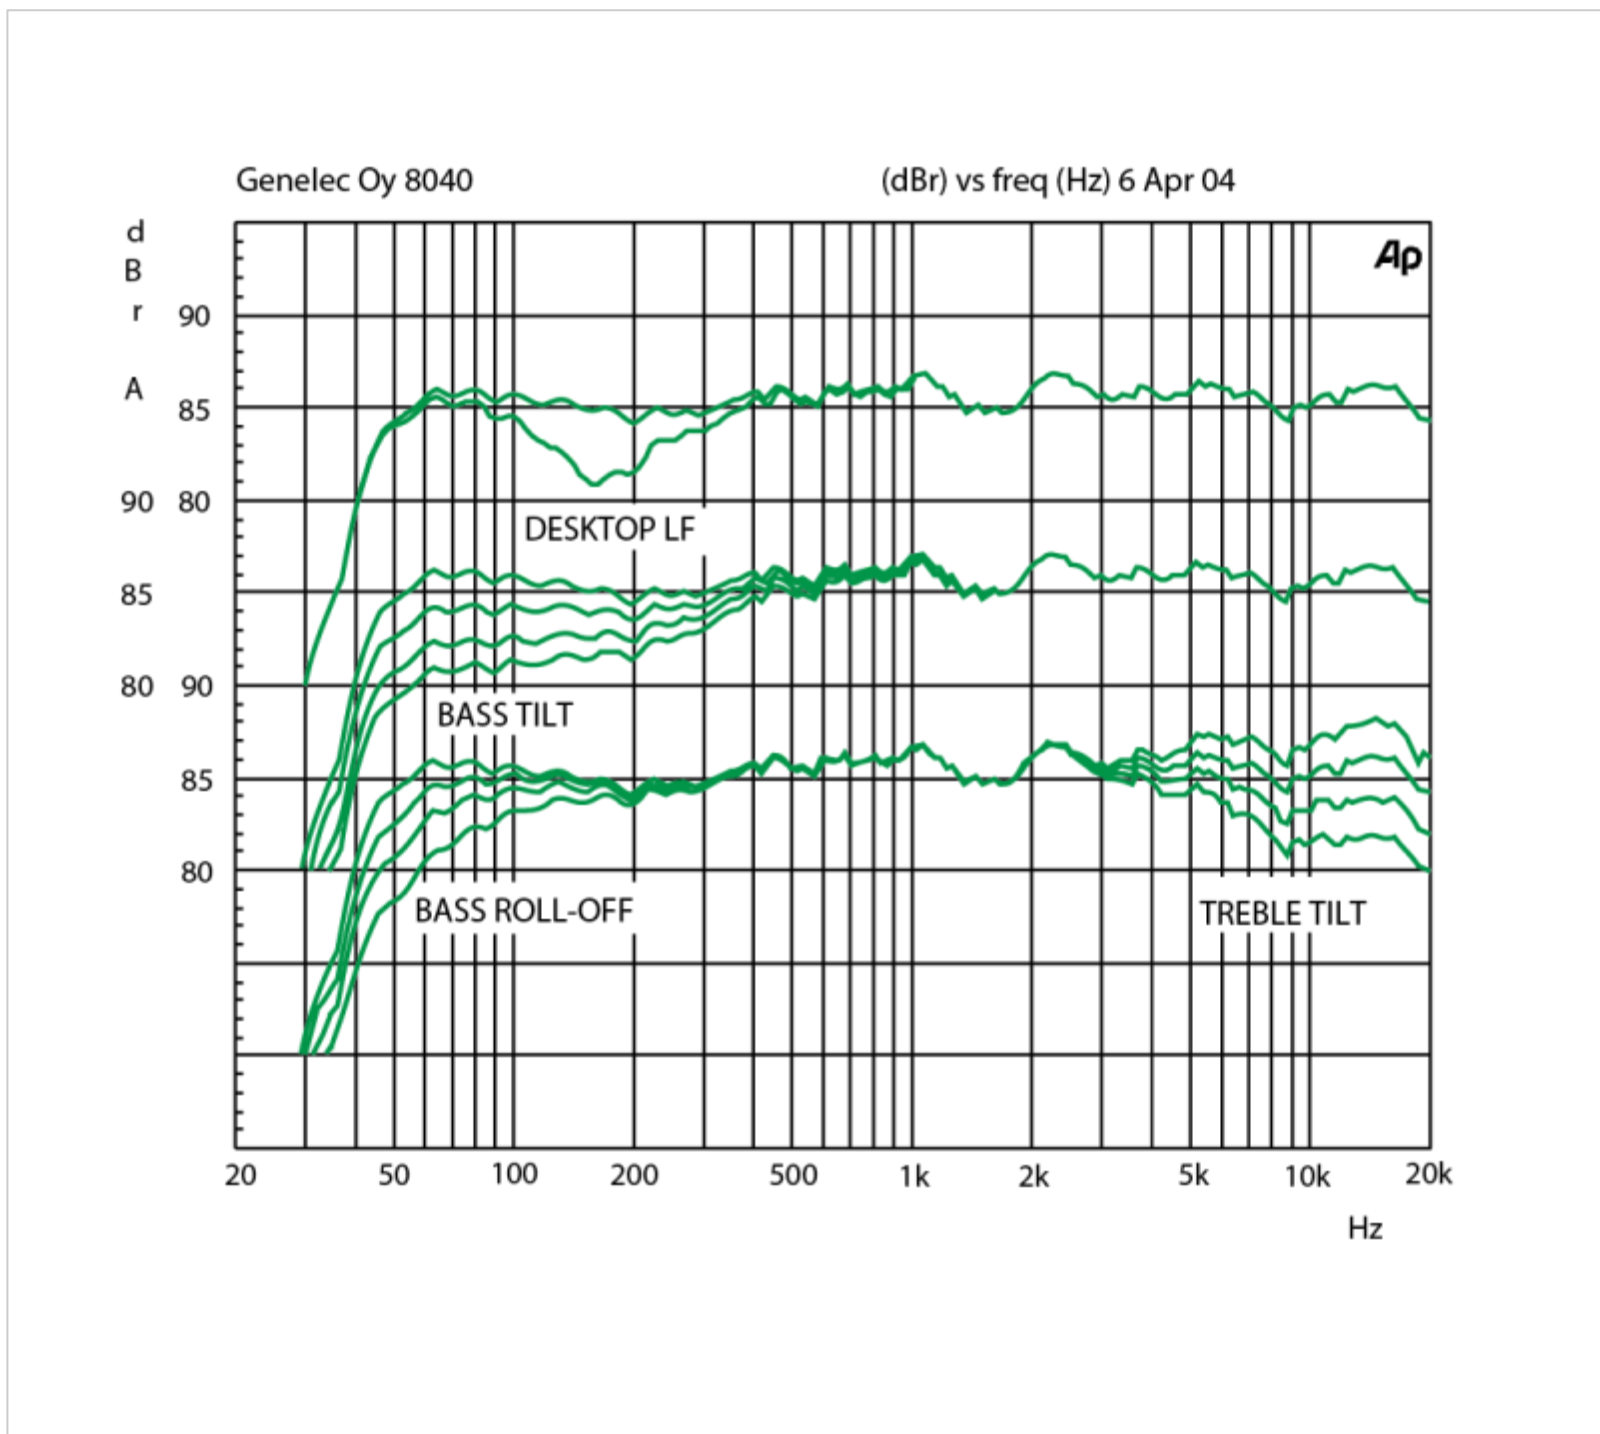

SPL

Peak SPL
≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

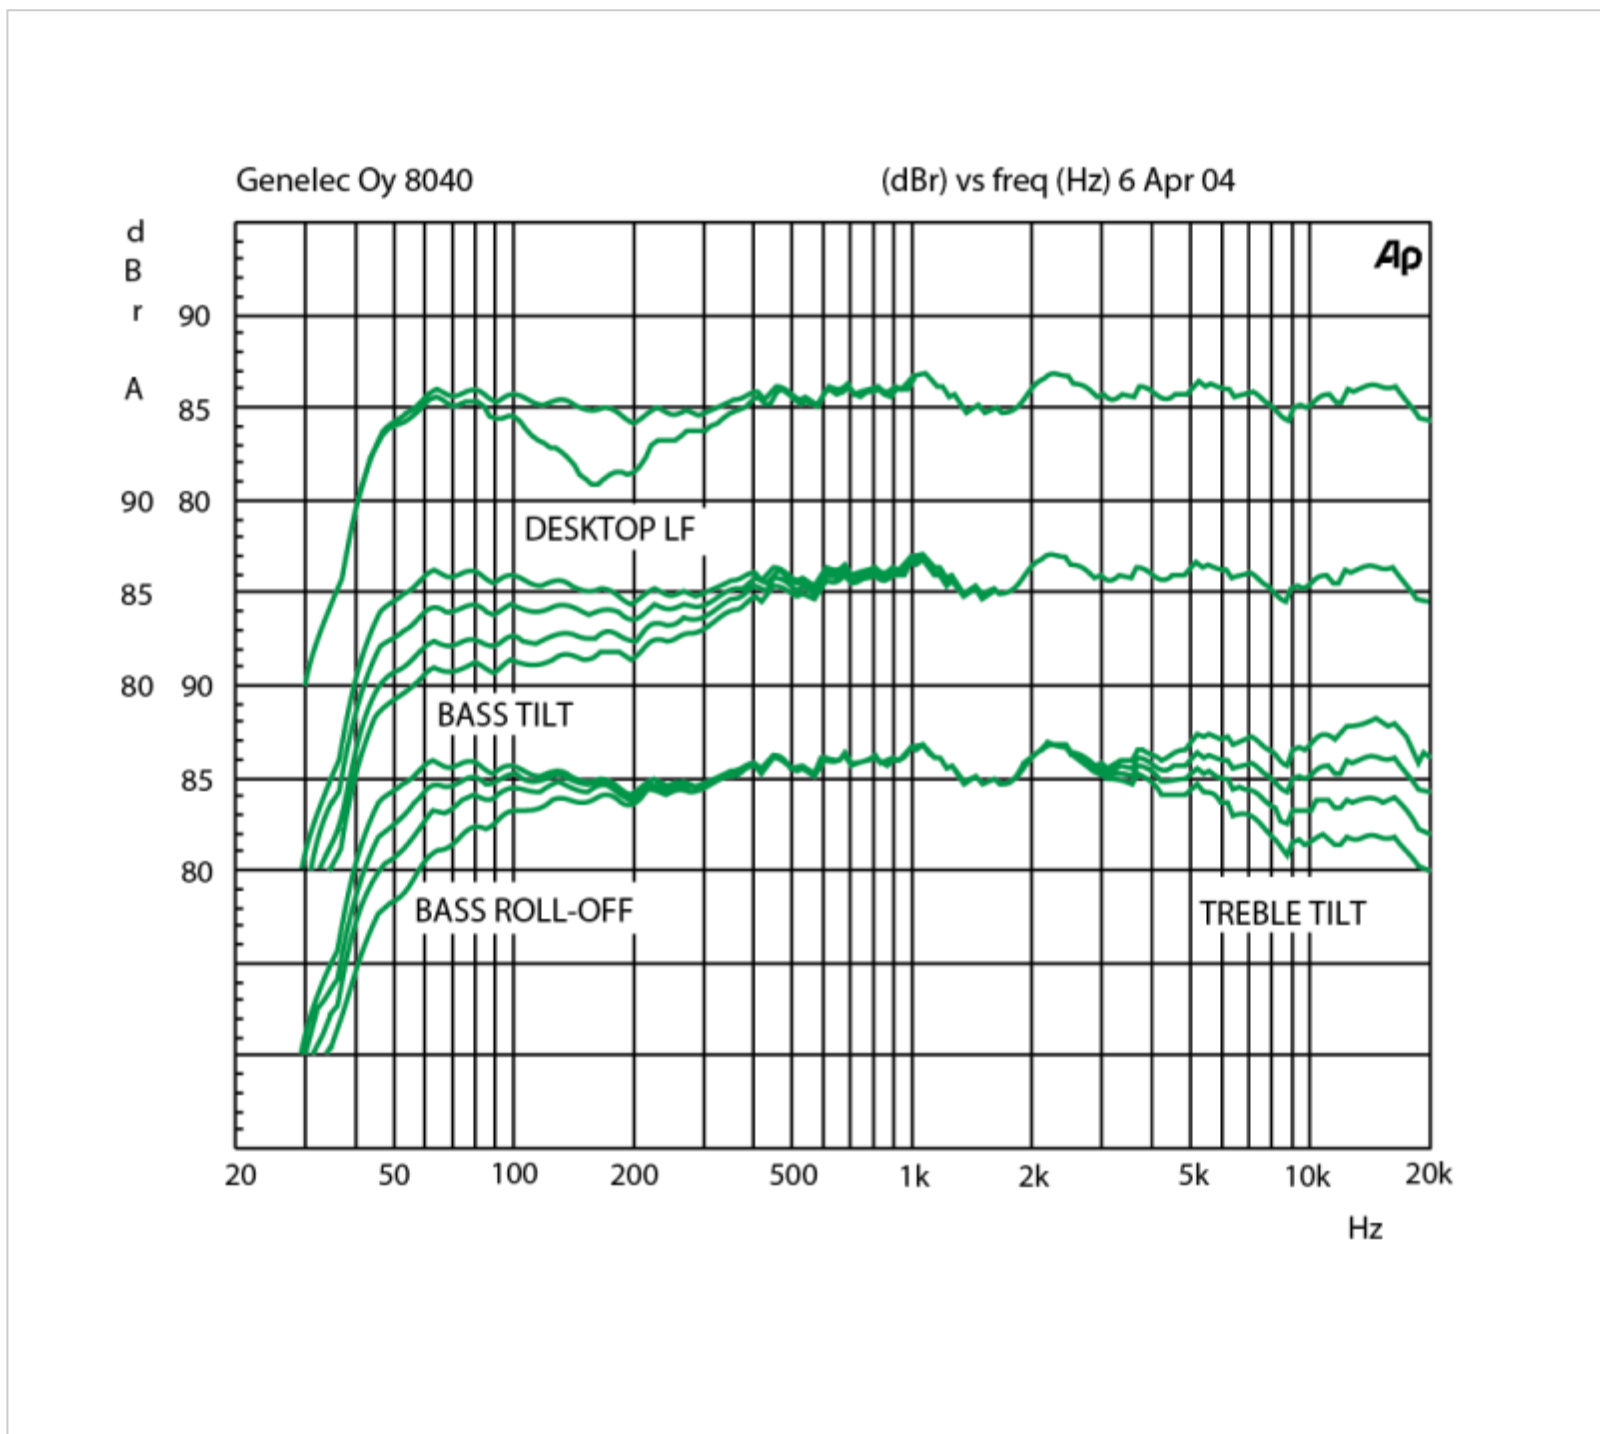

SPL

Peak SPL

≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

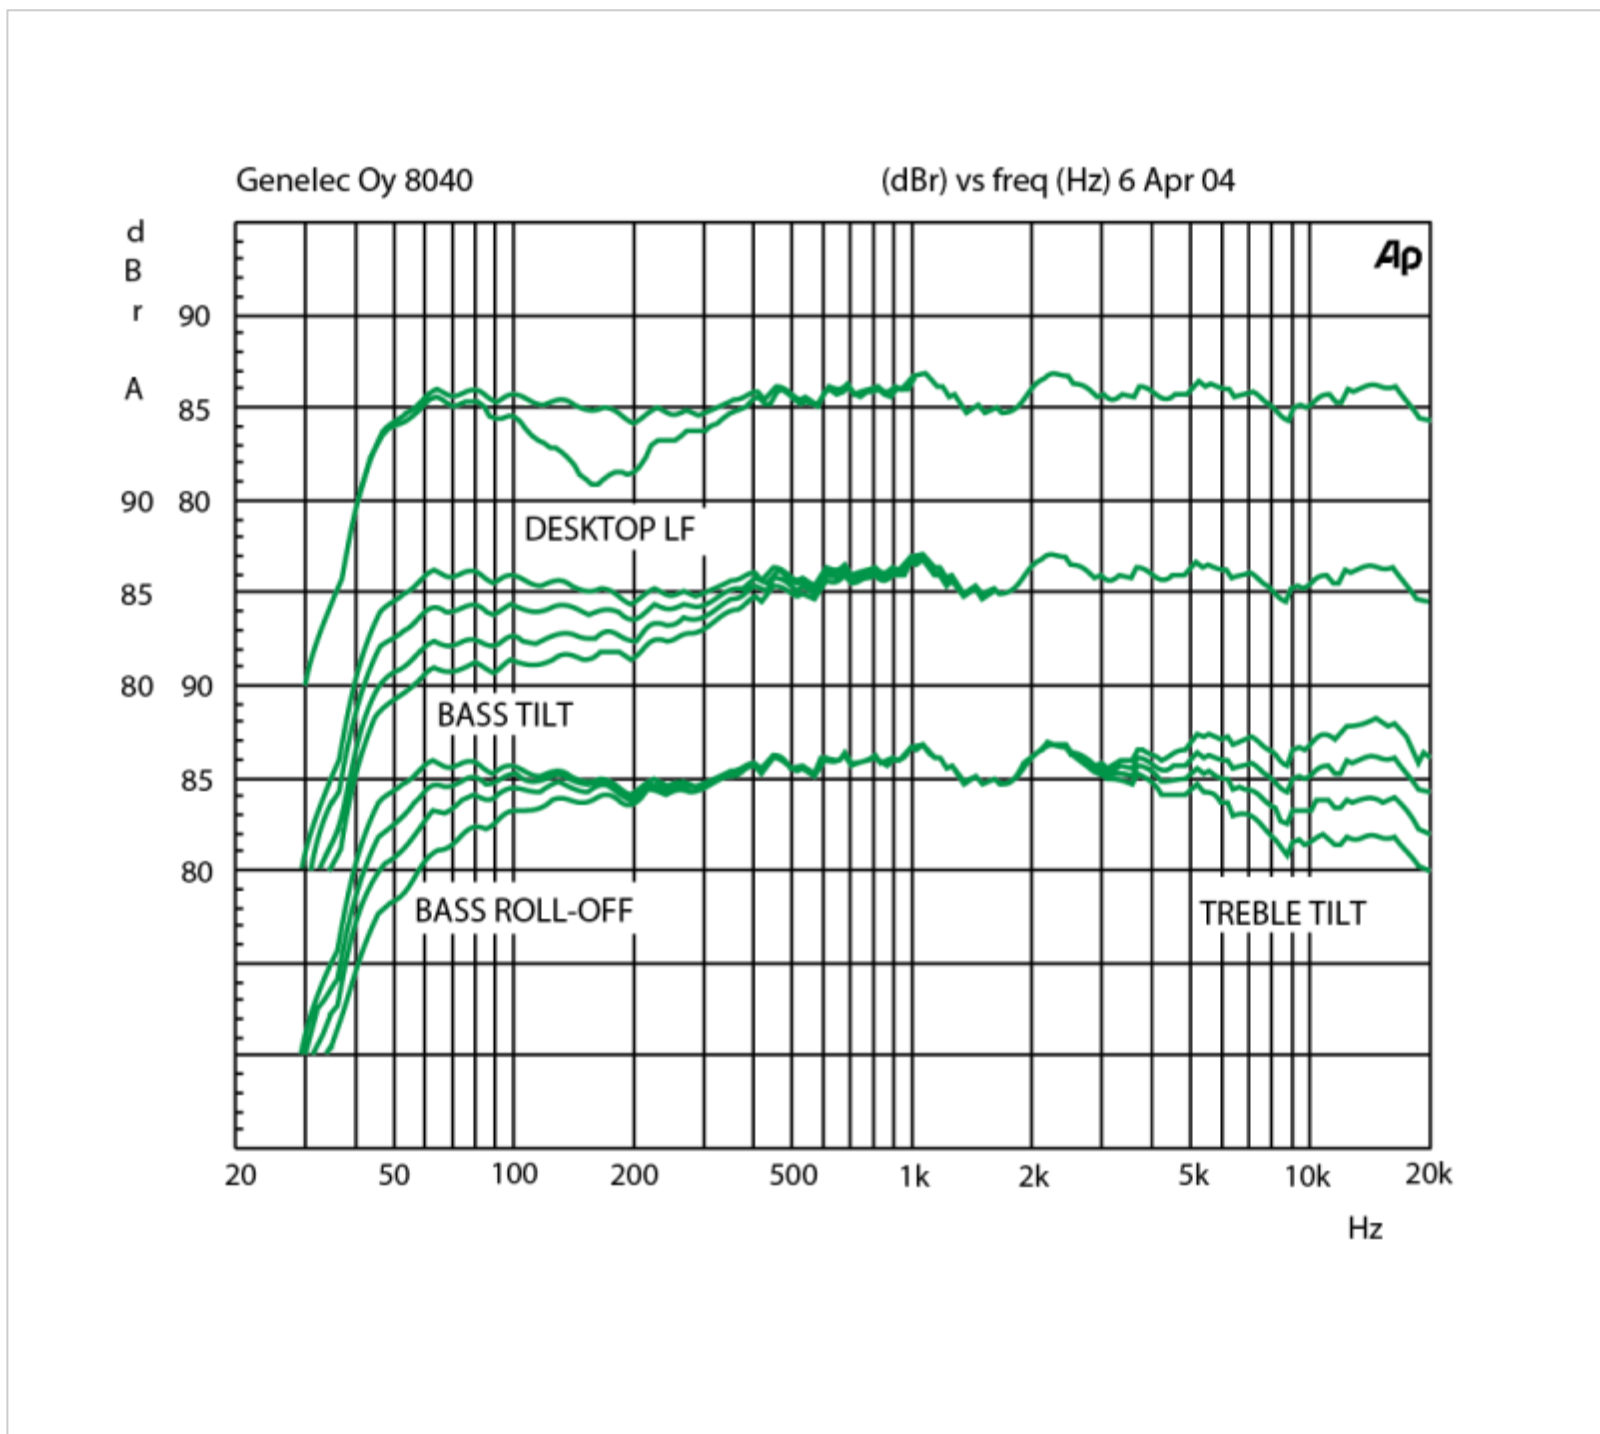

SPL

Peak SPL

≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

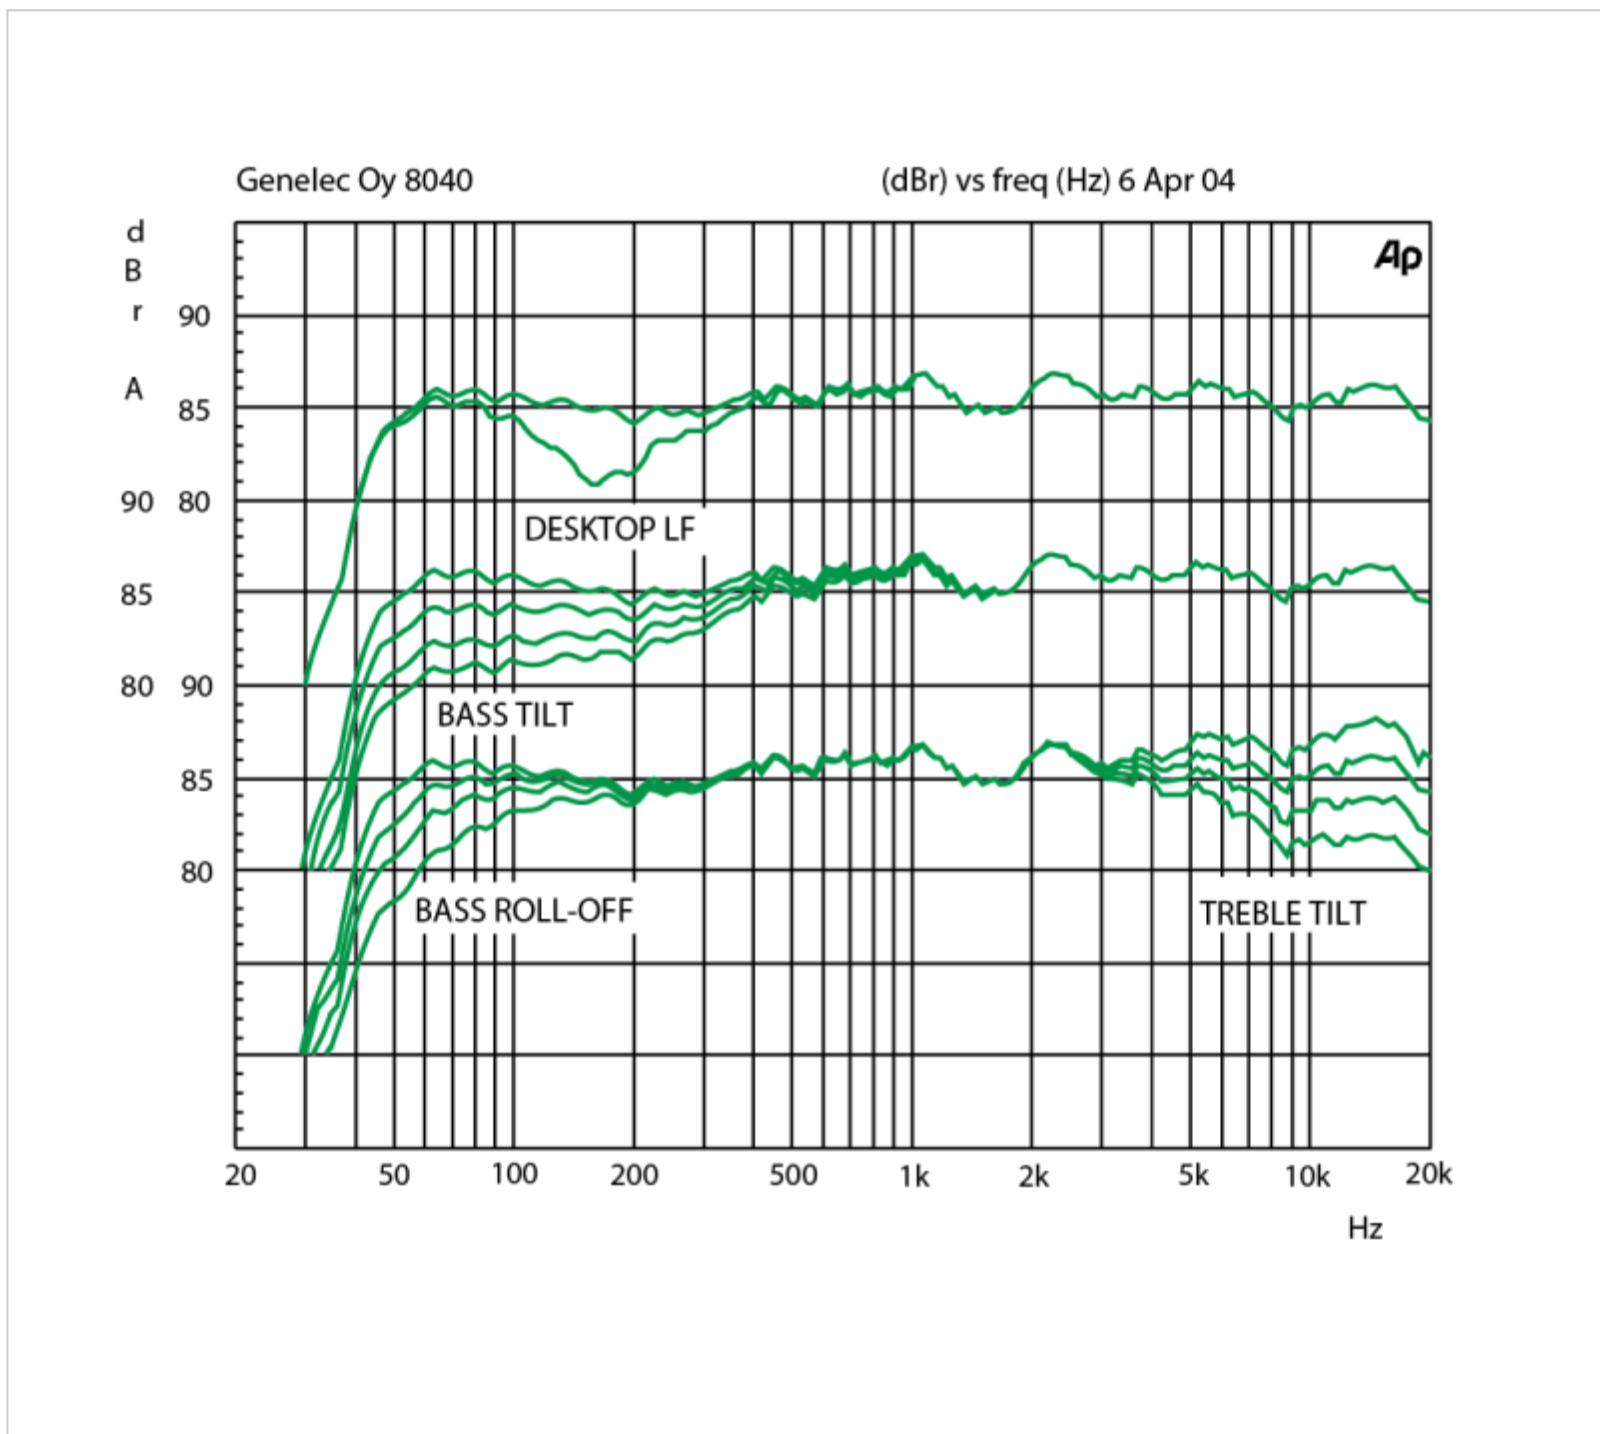

SPL

Peak SPL

≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

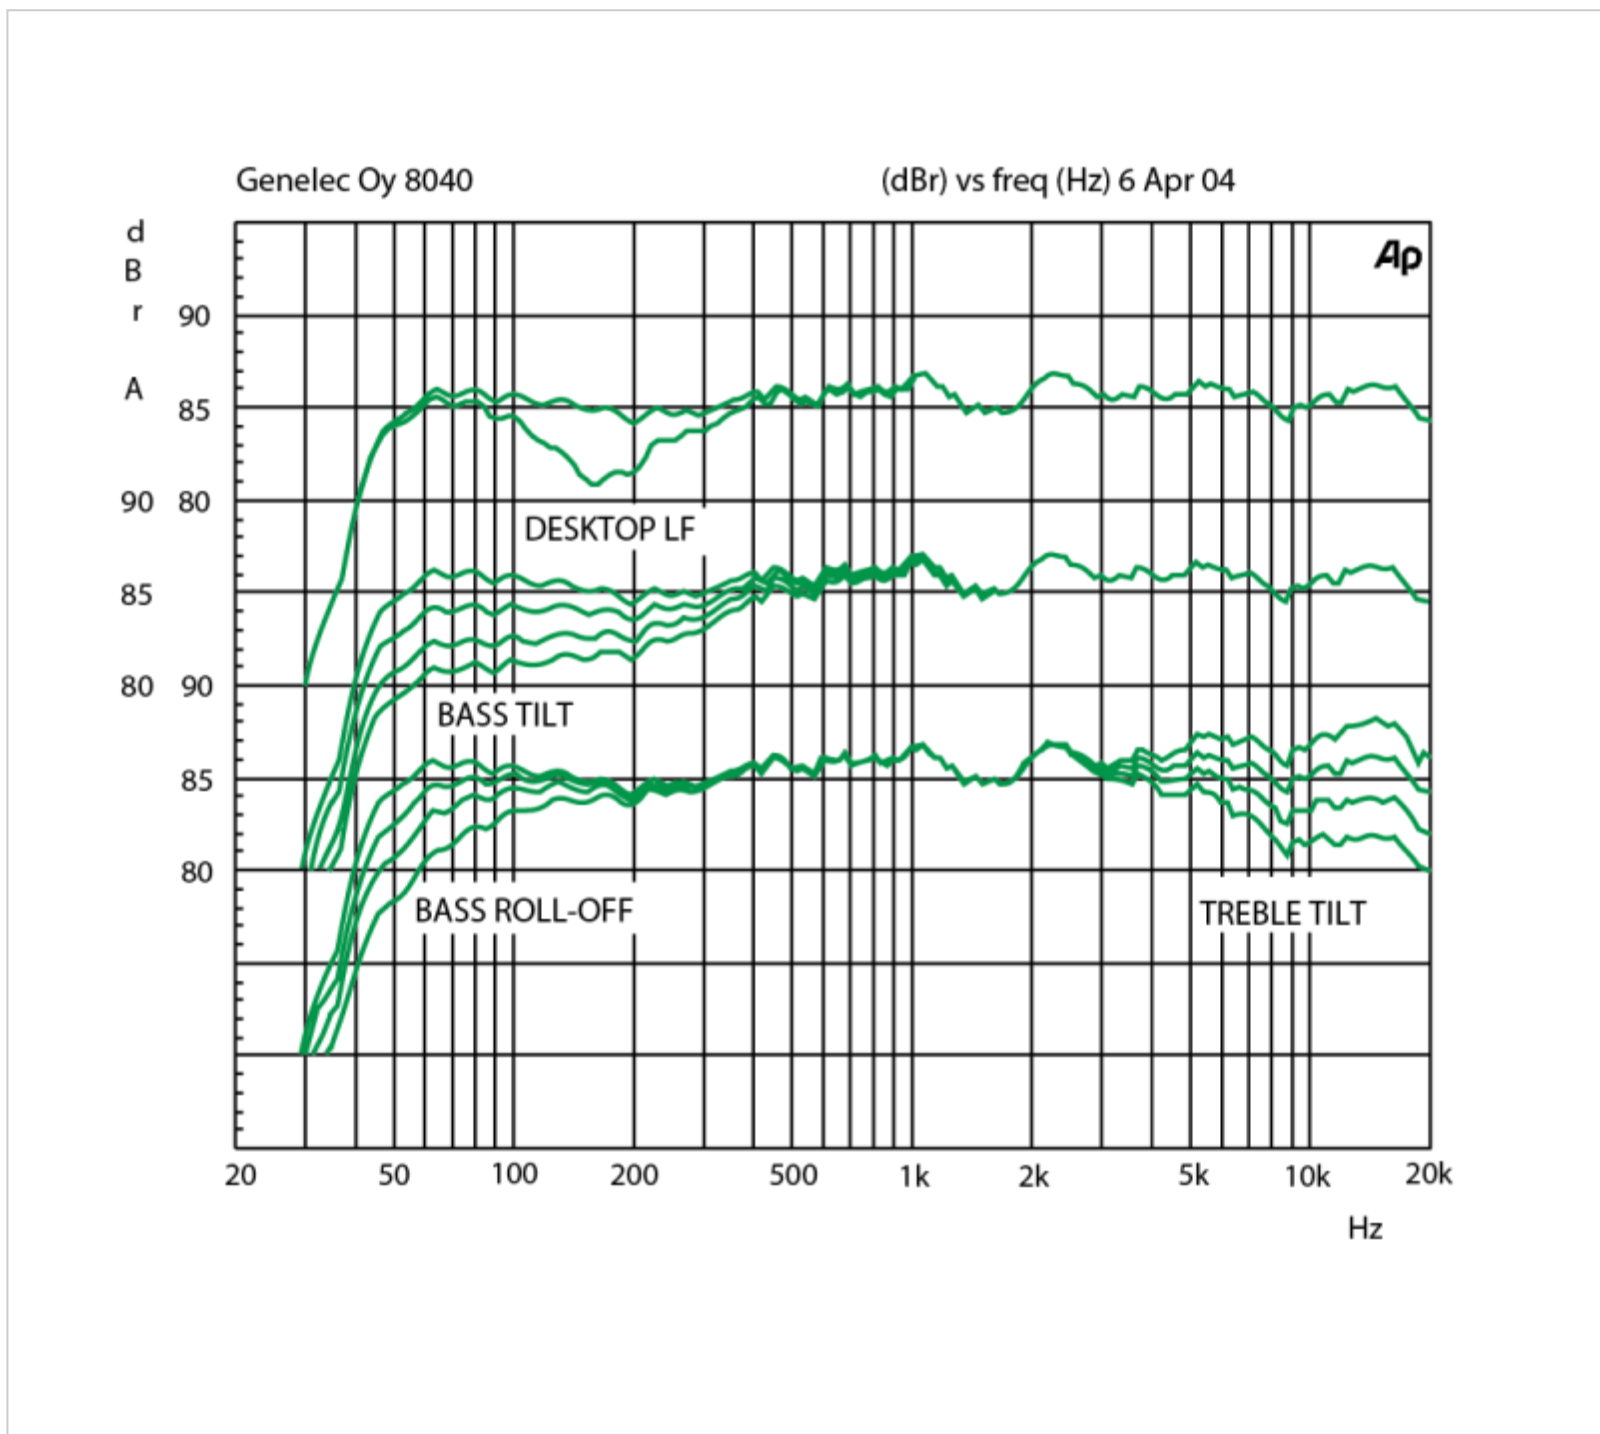

SPL

Peak SPL

≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

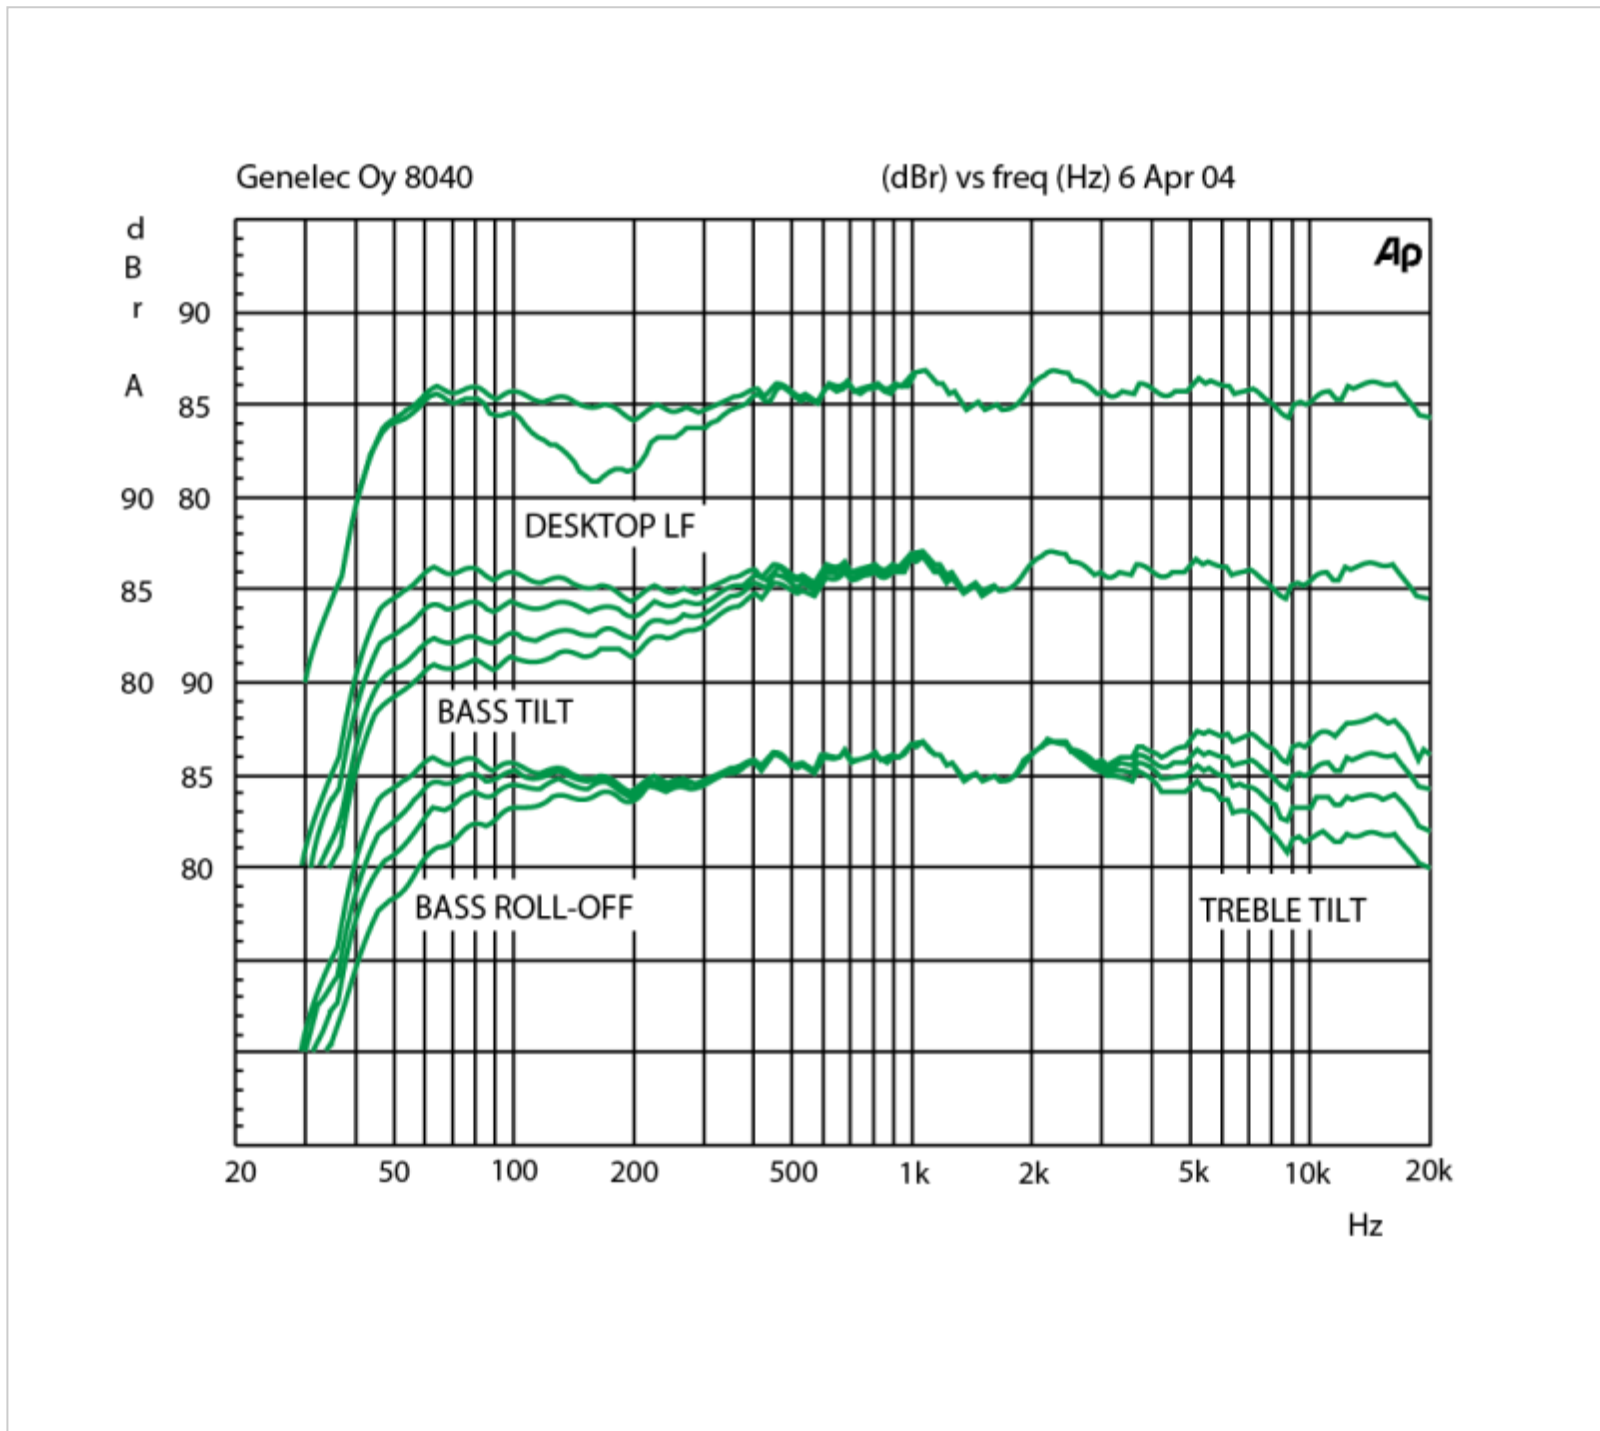

SPL

Peak SPL

≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

8040B Studio Monitor Technical Specifications

System Specifications

Frequency Response


48 Hz - 20 kHz (± 2 dB)

Low cutoff -6dB

41 Hz

High cutoff -6dB

21 kHz

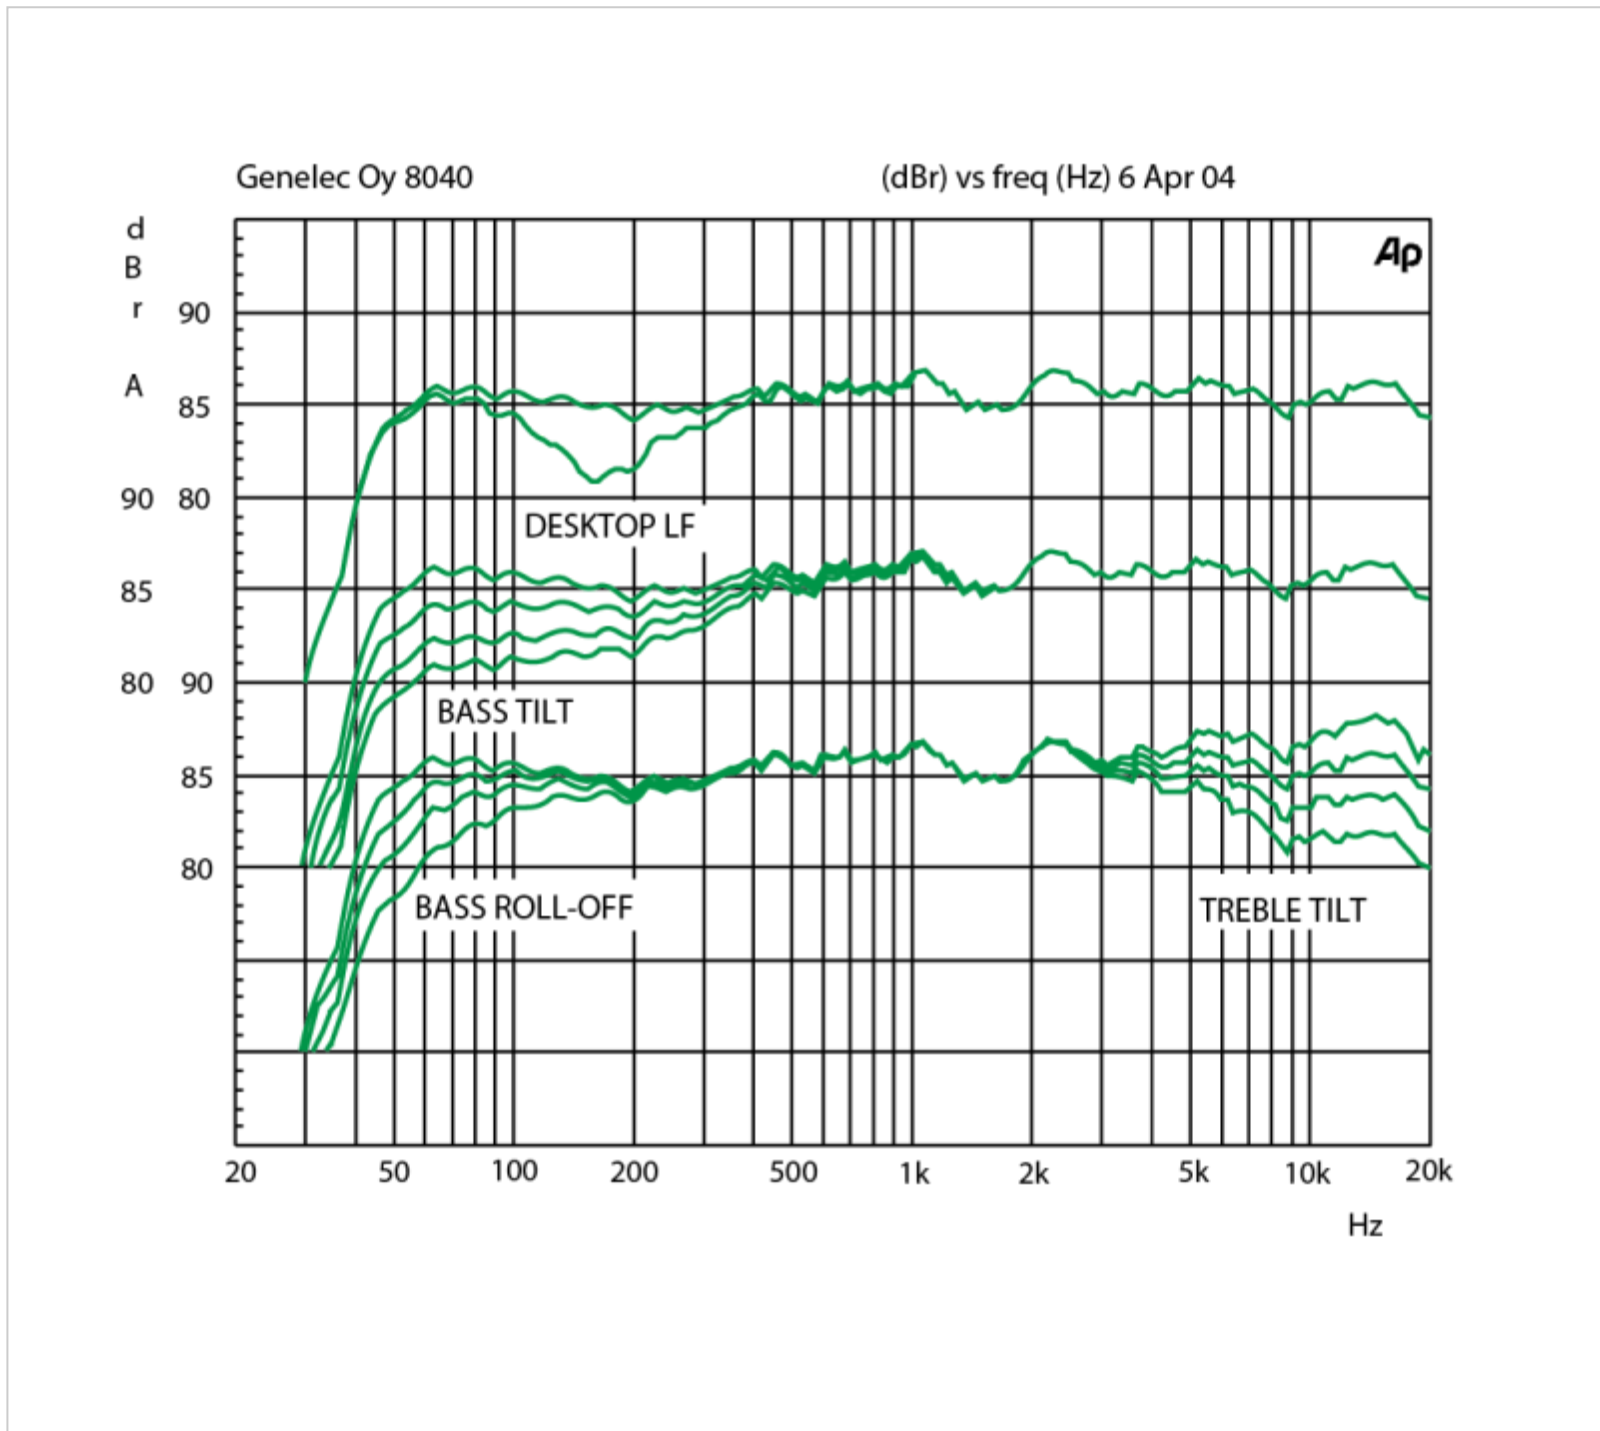

SPL

Peak SPL

≥115 dB

≥115 dB

Maximum peak acoustic output per pair at 1 m distance with music material.

Short term max SPL

≥105 dB

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

Long term max SPL

≥99 dB

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

