

**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

#### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

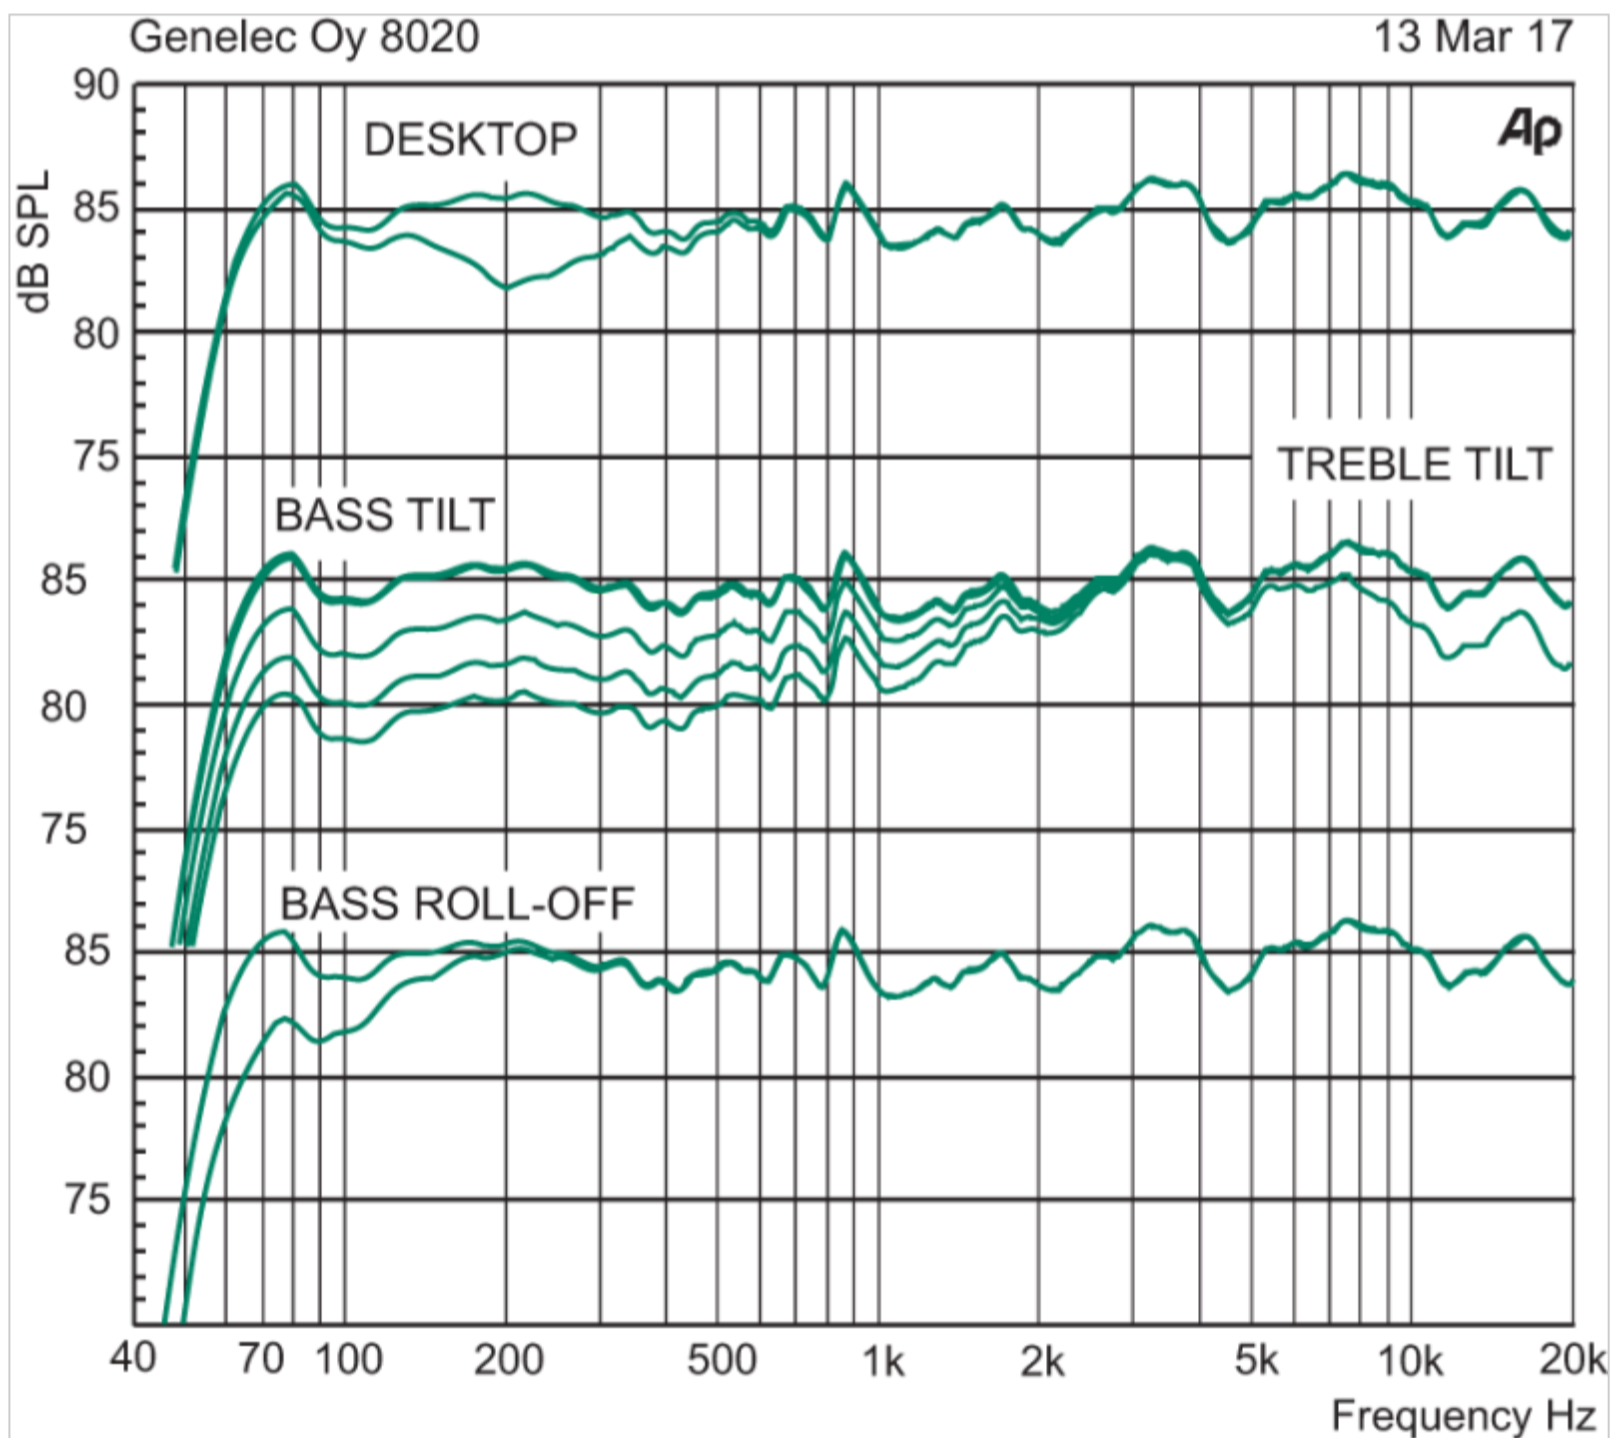

#### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.

**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

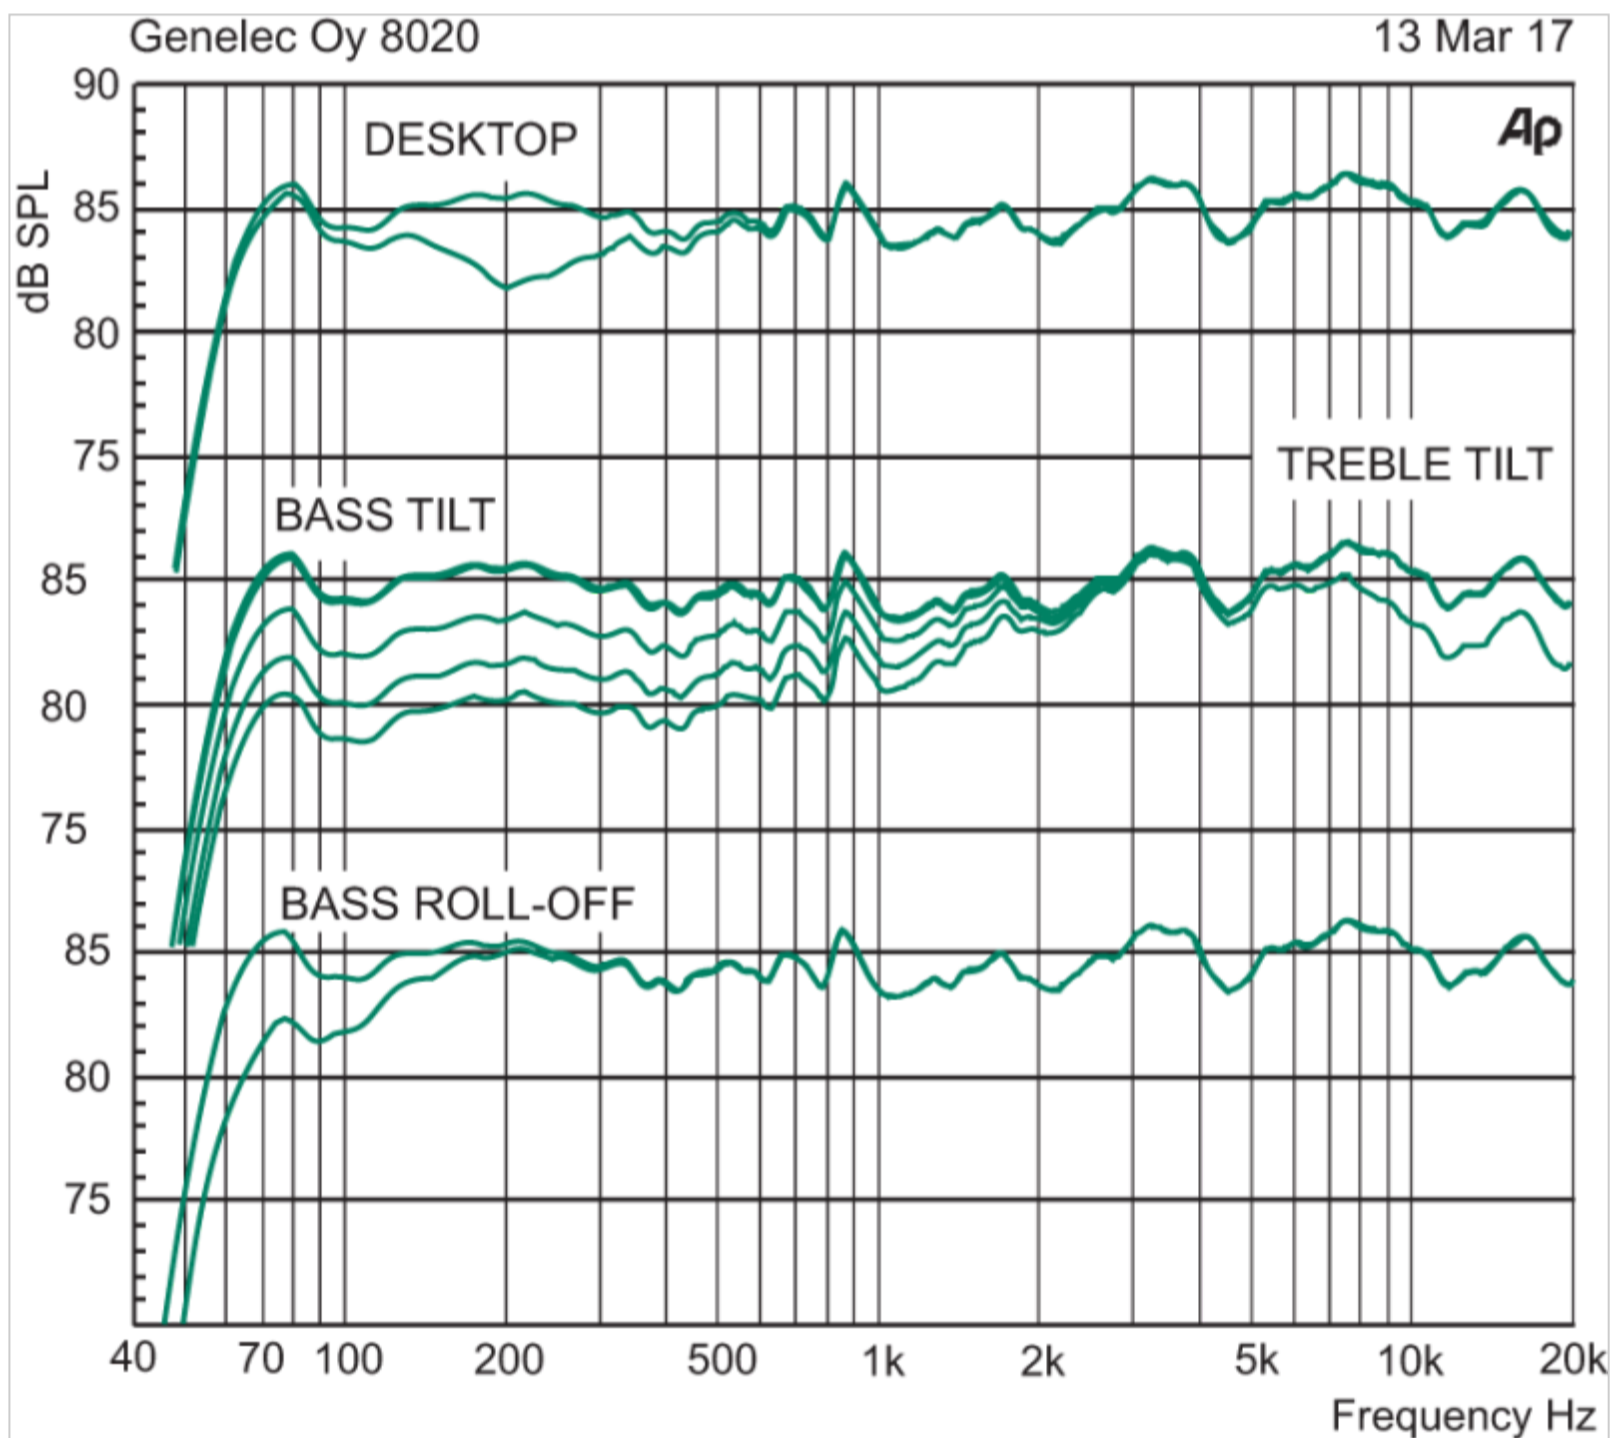

### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.

**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

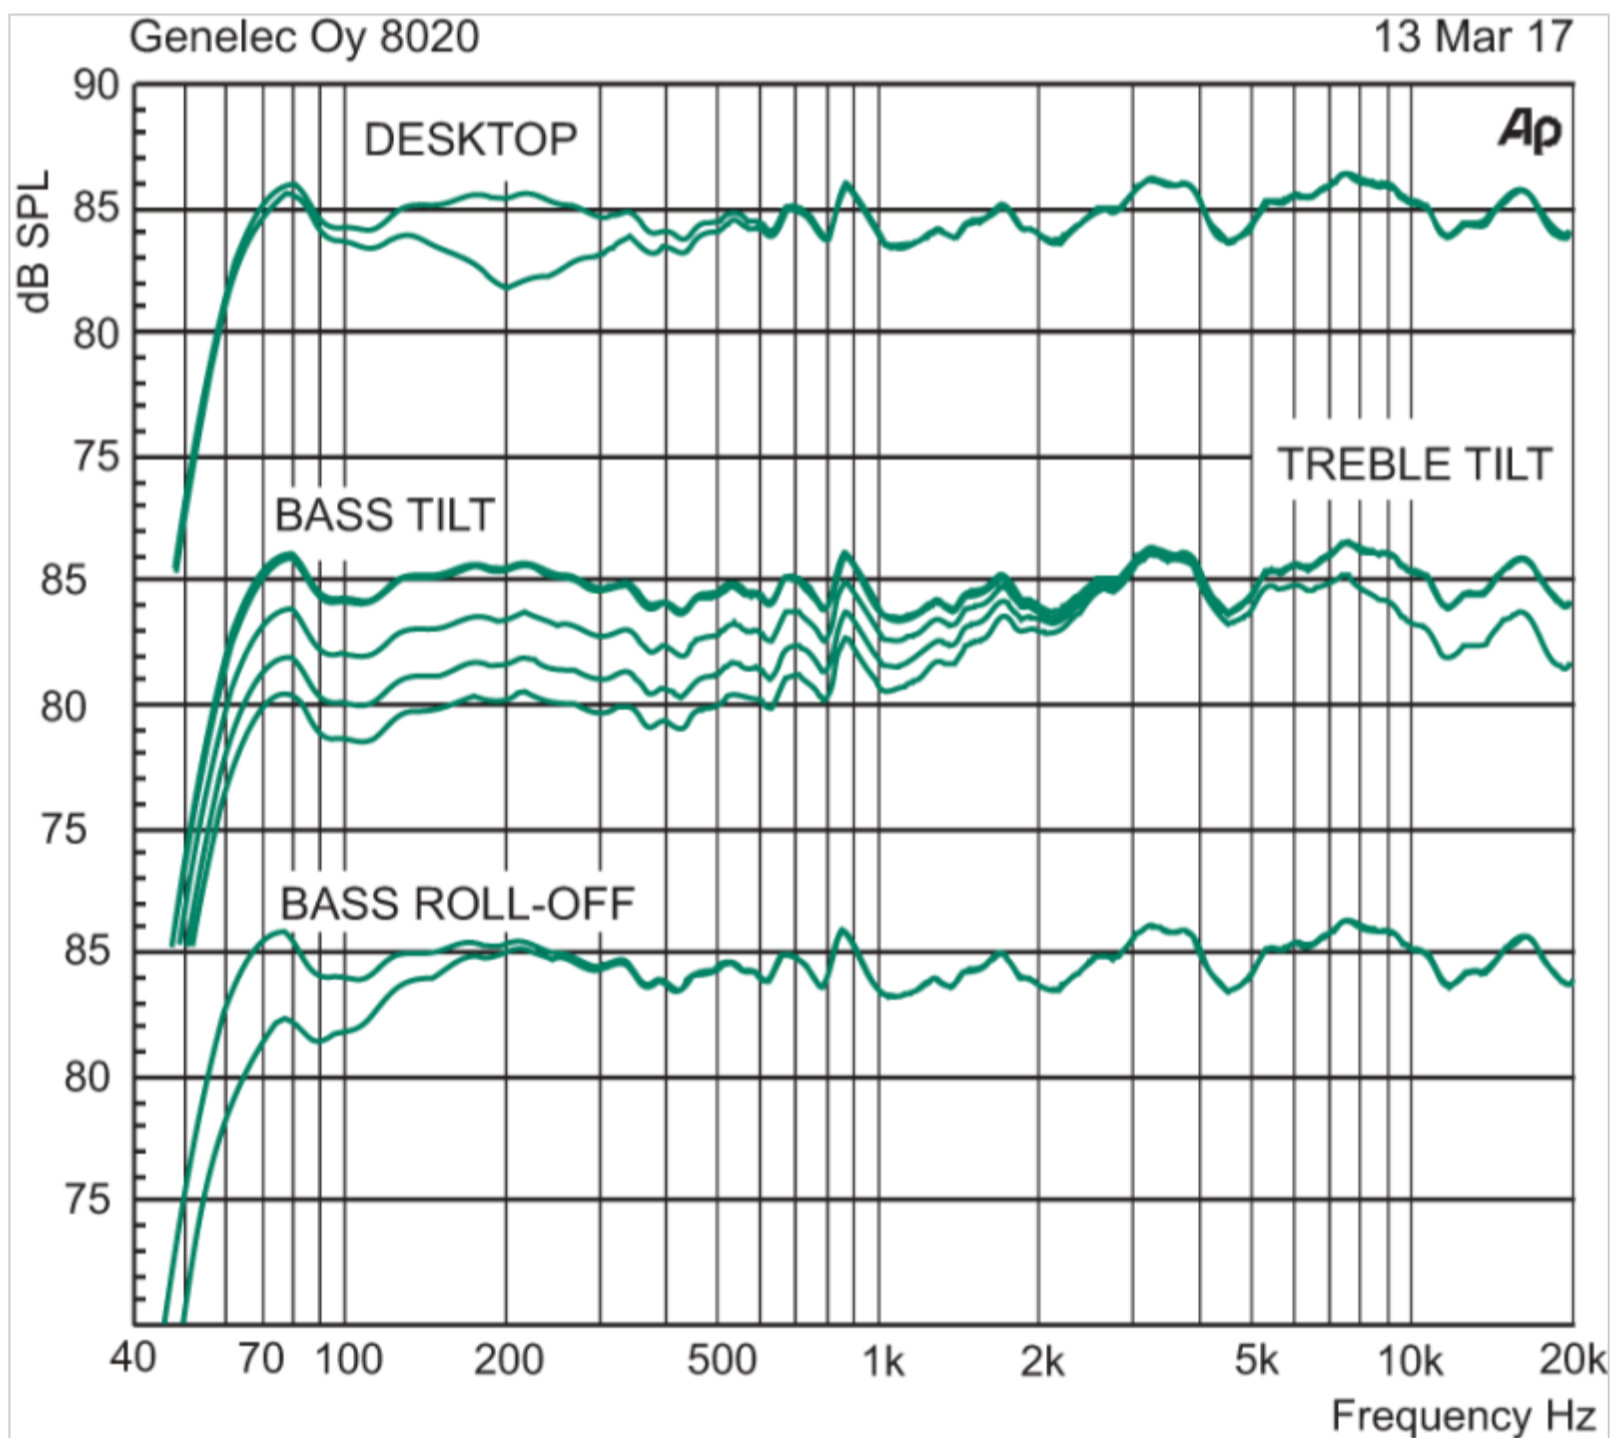

### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.

**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

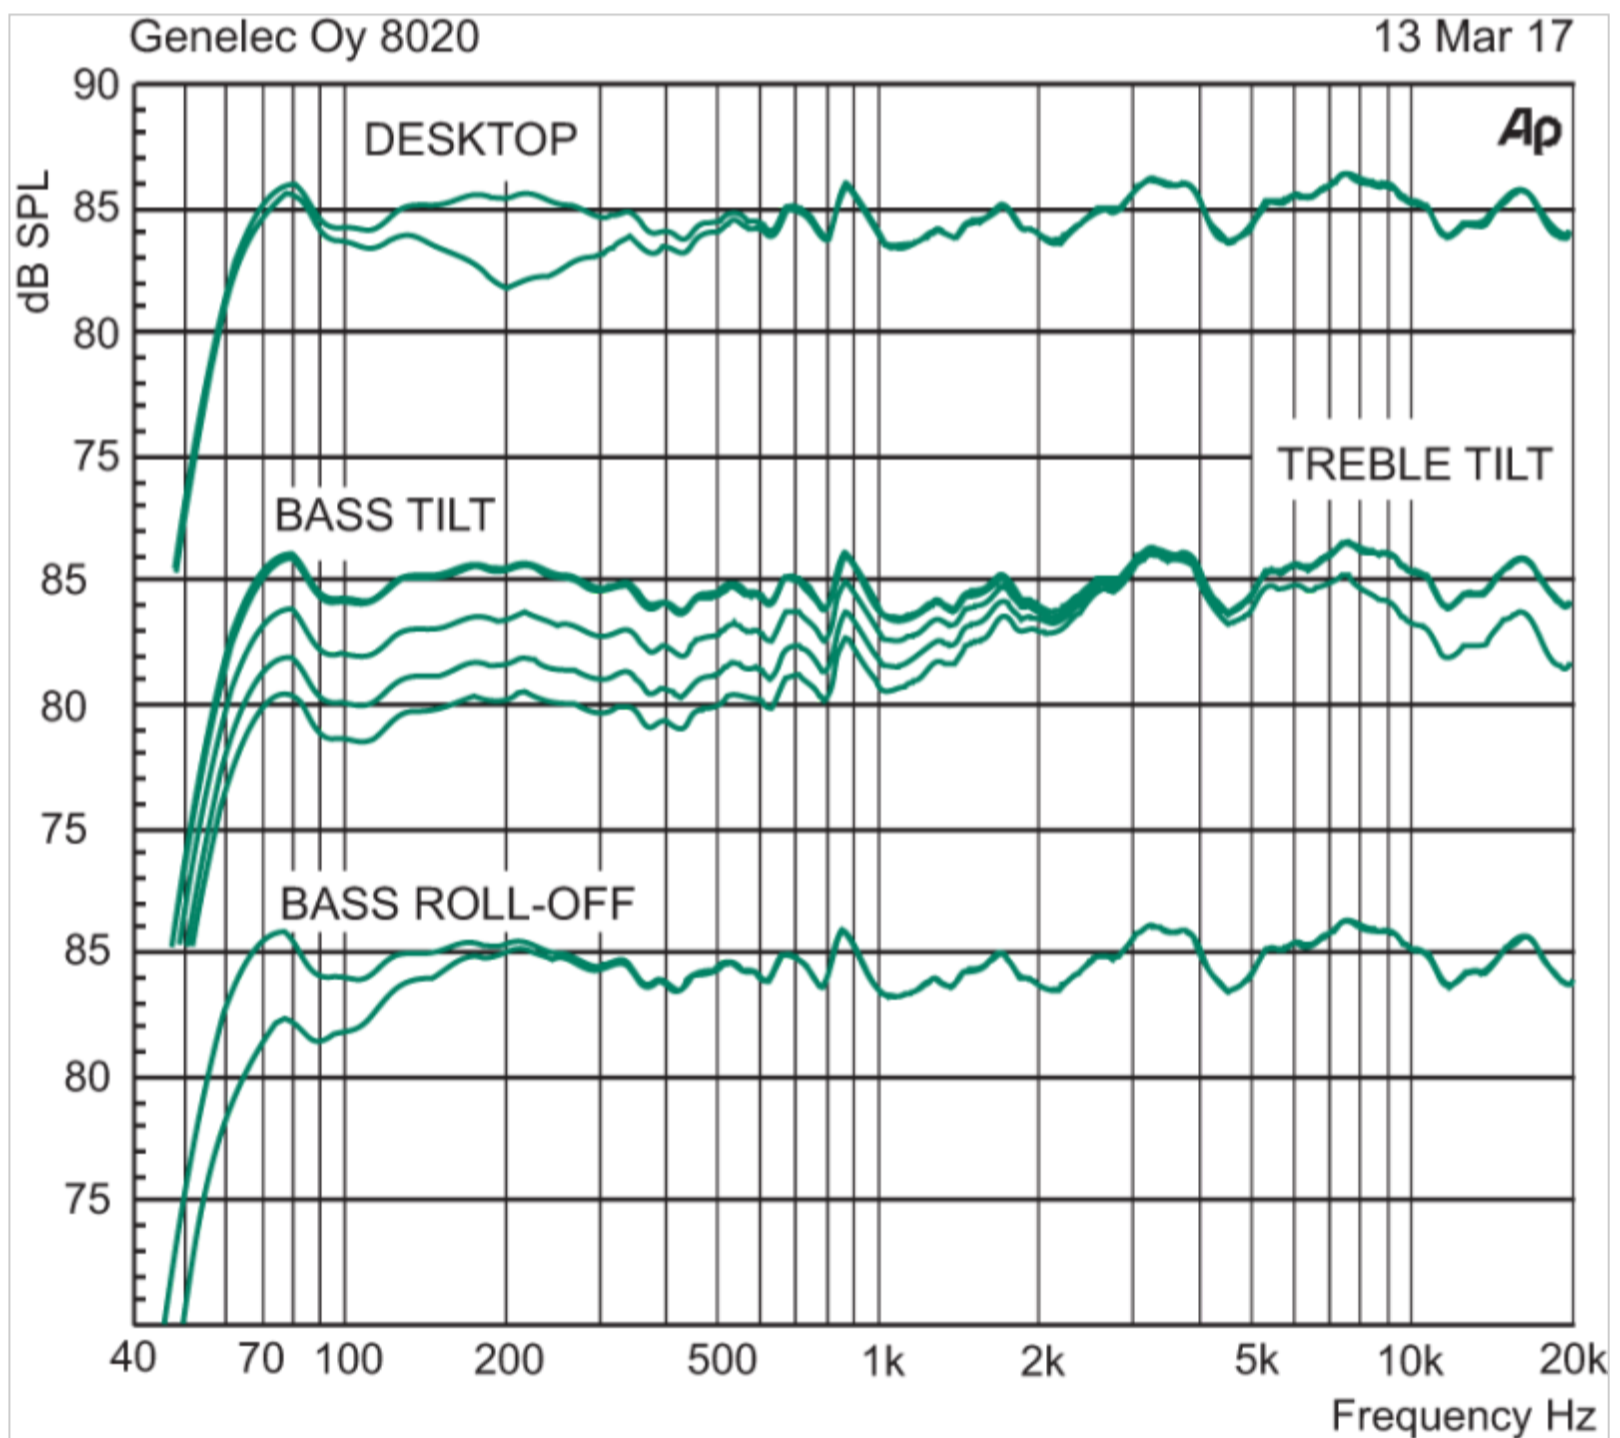

### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.

**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

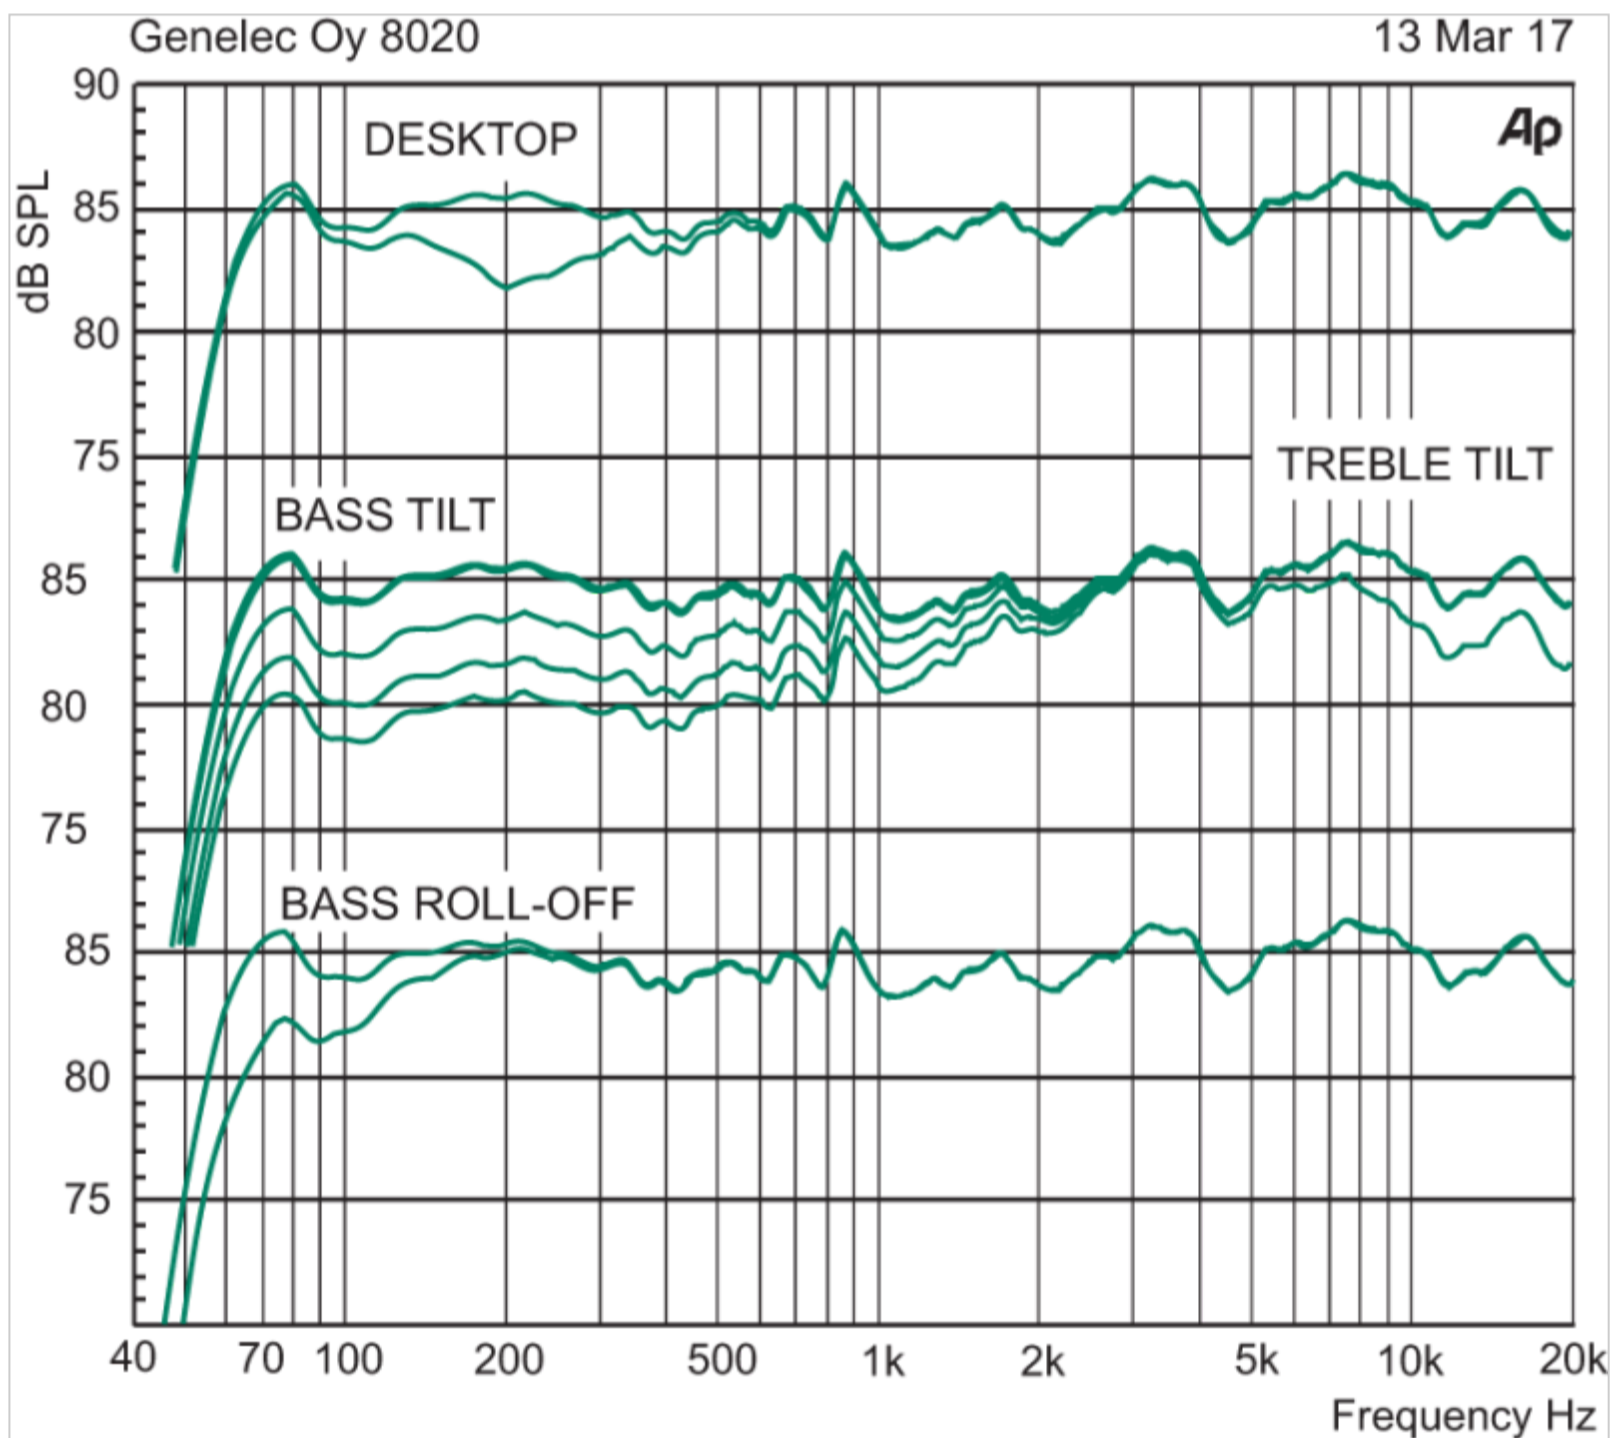

### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.



**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

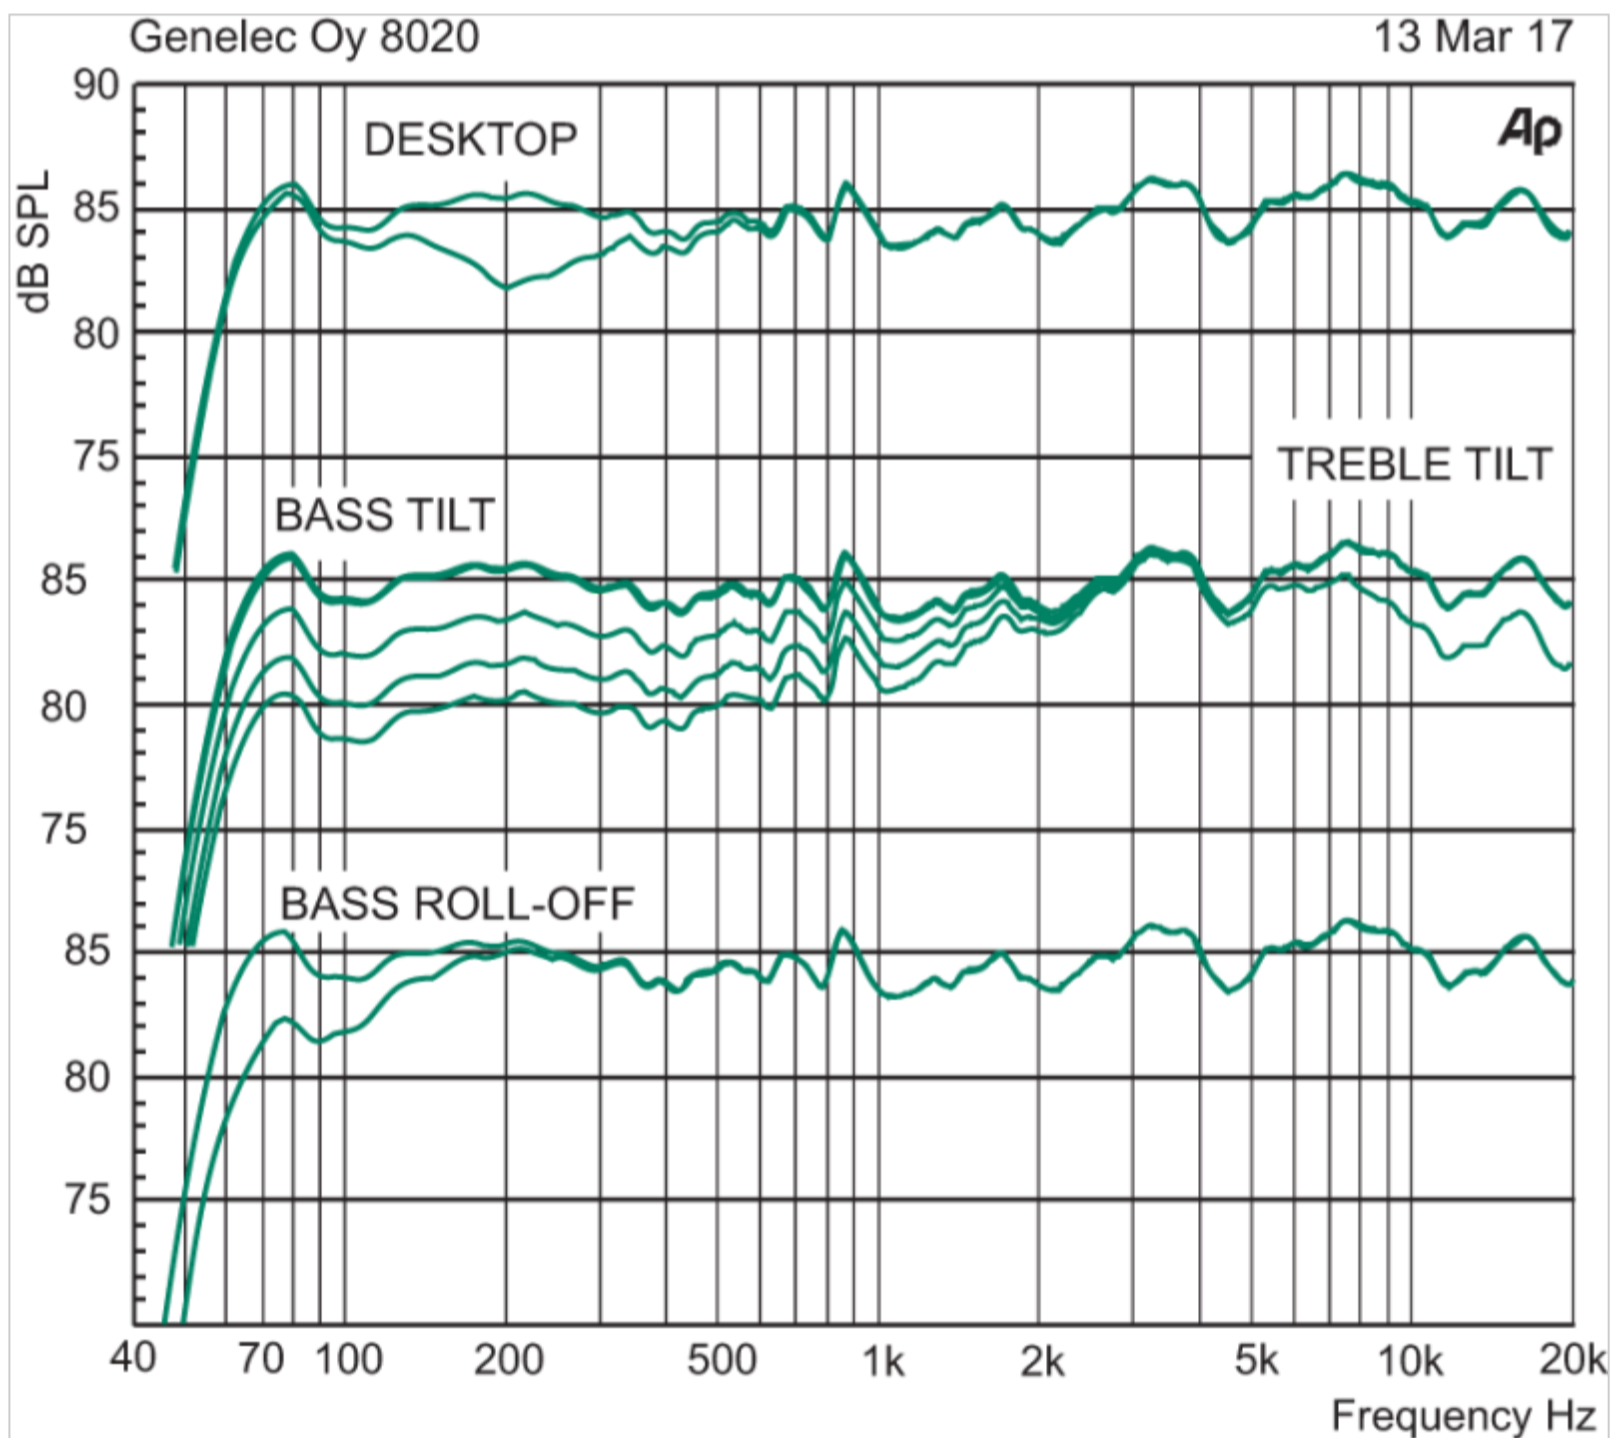

### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.

**Short term max SPL**  
**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**  
**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.

## 8020D Studio Monitor Technical Specifications


### System Specifications

### Frequency Response

62 Hz - 20 kHz ( $\pm 2.5$  dB)

Low cutoff -6dB  
56 Hz

High cutoff -6dB  
25 kHz

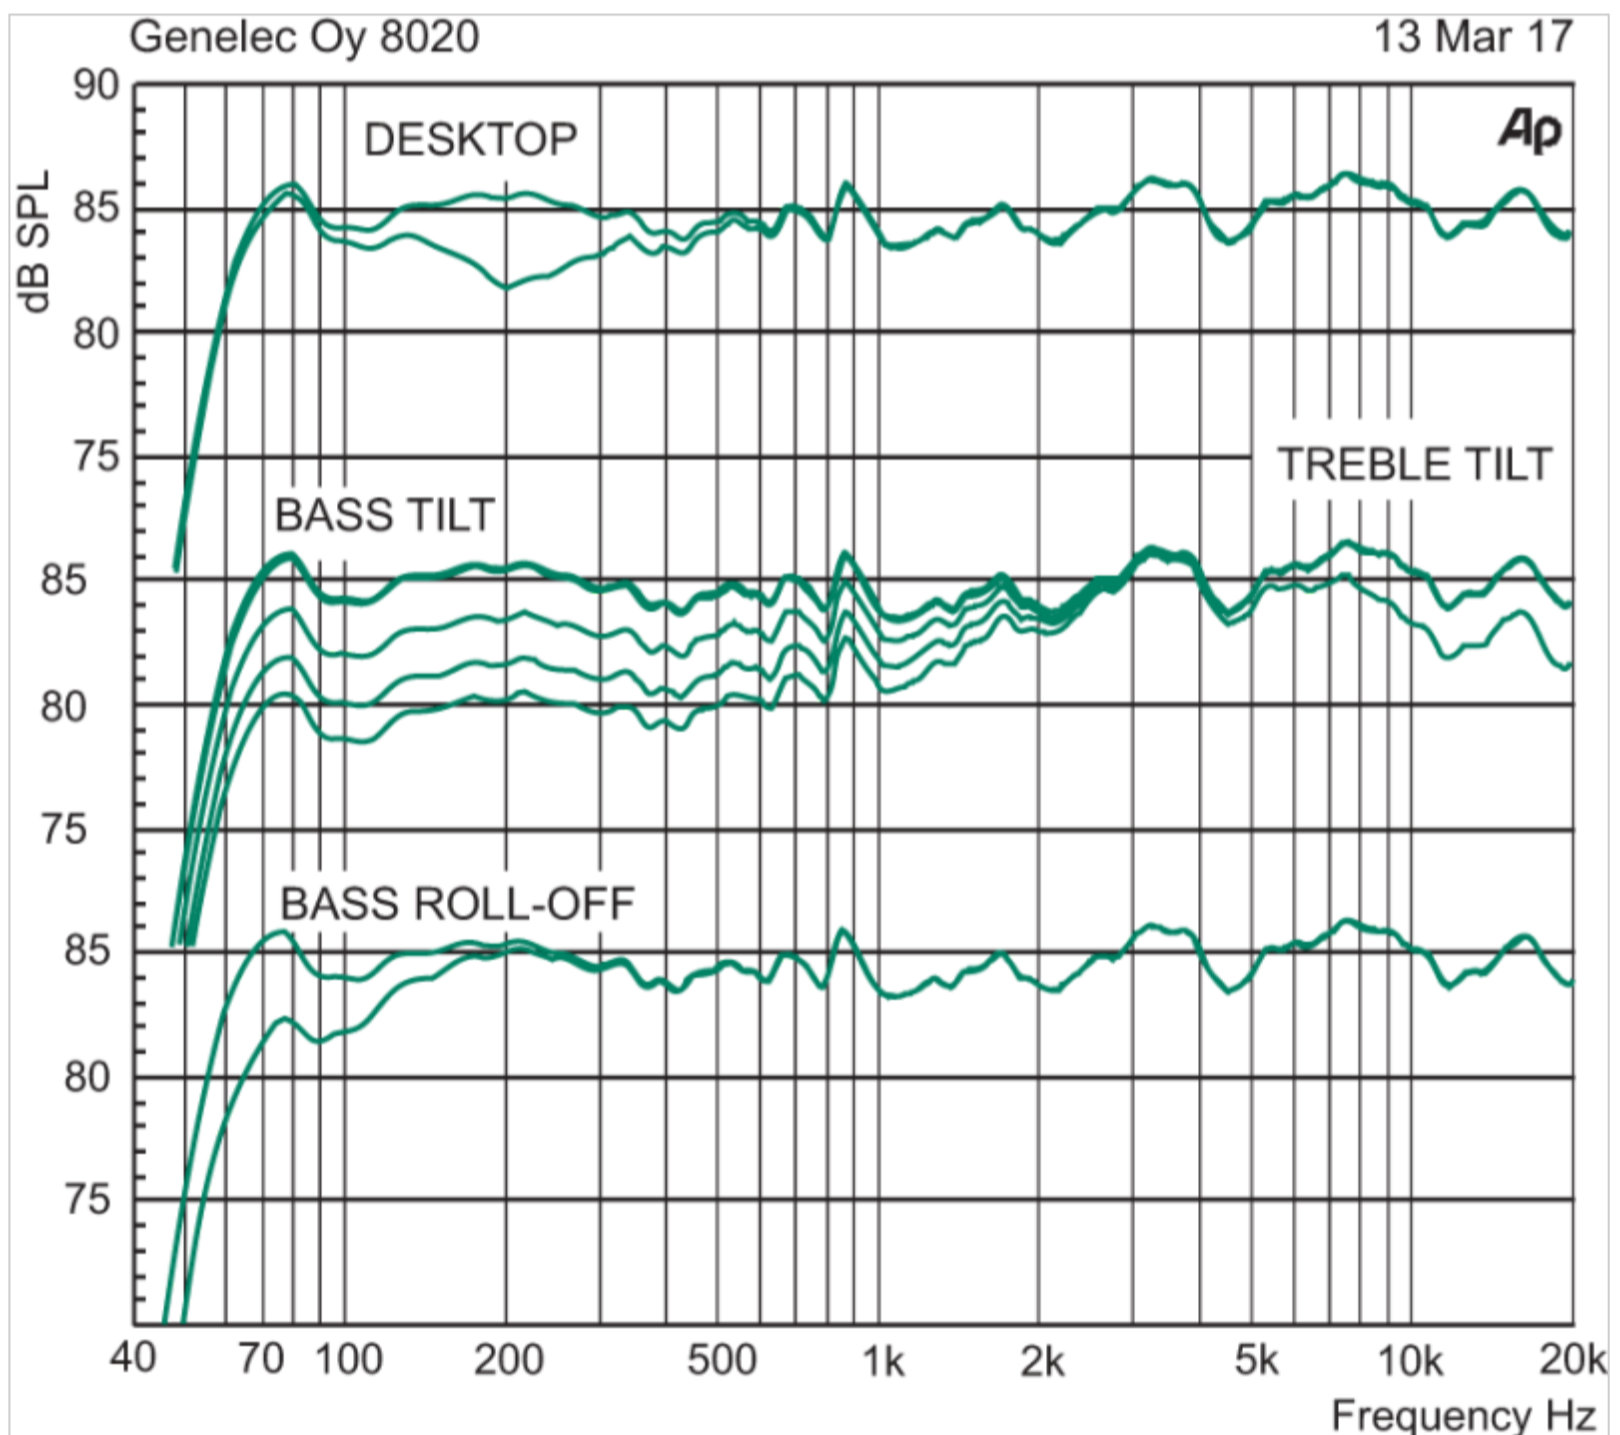

### SPL

**Peak SPL**  
**≥107 dB**

Maximum peak acoustic output per pair, at 1 m distance with music material.

**Short term max SPL**

**≥100 dB**

Maximum short term sine wave acoustic output on axis in half space, averaged from 100 Hz to 3 kHz at 1 m.

**Long term max SPL**

**≥93 dB**

Maximum long term RMS acoustic output in same conditions with IEC weighted noise (limited by driver unit protection circuit) at 1 m.



