

AMX526

Paging Microphone



For more than a decade the AMX526 has been the industry standard in desktop paging applications. The AMX526's frequency response is tailored specifically for voice paging applications. The rugged die-cast housing and heavy duty gooseneck provide the reliability you'd expect from a commercial grade product. The momentary and latching switch also provides dry contact closure operation to trigger per announce paging tones.



The AMX526 is recommend for commercial paging applications such as dispatch paging, hospitality paging, school paging and many other commercial paging applications.

Features

- Rugged dynamic capsule
- Heavy duty die cast chassis
- Heavy duty gooseneck
- Tailored for voice paging
- Momentary push to talk or (ON) toggle switch
- Dry contact closure trigger

Specifications

Transducer Type	Dynamic
Polar Pattern	Cardioid
Frequency Response	80Hz – 12Khz
Sensitivity	-70dB ± 3dB
Electrical Impedance	600Ω
Finish	Matte black with silver face plate
Cable	XLR 3 pin terminated 5 core cable 2.0 meters
Audio Connection	Pin 2 + (Red) Pin 3 – (Black) Pin 1 Earth (Shield)
Dry Contact	Yellow & White conductors inside XLR connector
Net Weight	980g
Shipping Dimensions H x W x D	270 x 185 x 130 mm

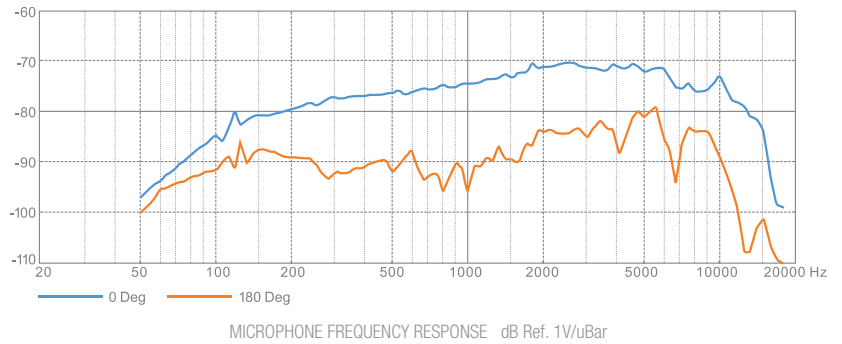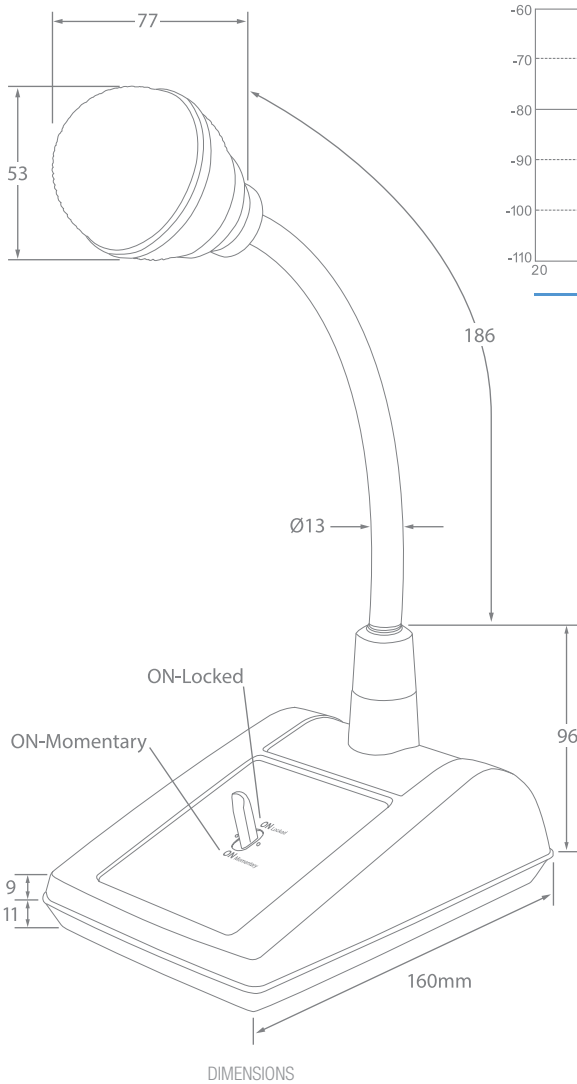

ENGINEERED BY AUSTRALIAN MONITOR
 Address: 1 Clyde Street, Silverwater NSW 2128 Australia.
 Website: www.australianmonitor.com.au
 International enquiries email:
customersupport@australianmonitor.com.au
 ABN 35 007 573 417

