



Key Features

- myViewBoard™ suite with whiteboard, wireless casting and remote device management
- Front-facing dual speakers for better engagement
- Pen-on-paper writing experience with Ultra Fine Touch Technology
- Quad Core CPU powered by Android 9.0 OS
- Low blue light certified

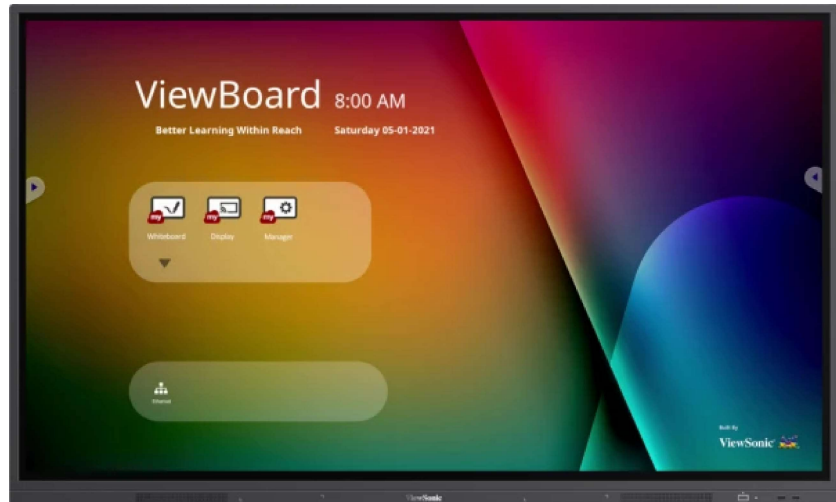

Product Description

The ViewBoard® 32 series provides a comprehensive solution for schools and teachers looking to deliver more interactive and engaging lessons. The 4K UHD display features bonding technology for clearer colors and less glare. A 20-point touchscreen interface allows users to collaborate naturally either with a finger or one of the ViewBoard styluses. The built-in access to the myViewBoard suite brings together all of the hardware with a seamless software integration. The display also features Ultra Fine Touch Technology that delivers a paper-like writing experience with instant response and high accuracy, while dual-tip pen support allows you to simultaneously write or draw with two different colors. Users will also enjoy additional connectivity via the SmartPort™ USB and multi I/O ports, including HDMI/VGA, when looking to connect other devices for further classroom support. The included myViewBoard digital whiteboarding software combines enterprise-level security with cloud-based portability and annotation tools including simple, wireless casting capability with secure single sign-on, innovative collaboration tools, easy conversion of common files, and much more. Additionally, myViewBoard Manager offers a single-point management system capable of simultaneously controlling multiple displays.

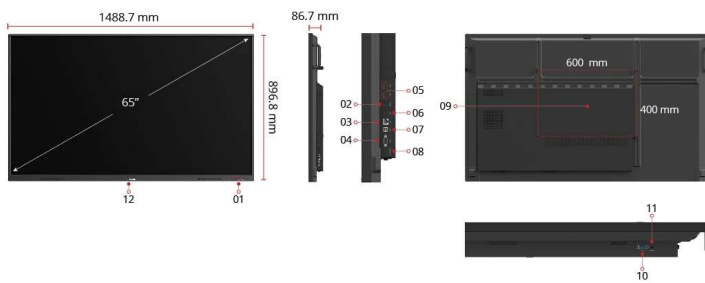

- 1. Smart Port USB™ X 2
- 2. Camera
- 3. LAN
- 4. RS232
- 5. HDMI X 2
- 6. USB 2.0
- 7. Touch

- 8. Audio Out
- 9. VESA® Wall Mount 600 x 400mm
- 10. VGA
- 11. Audio In

Visit Us  www.viewsonic.com

DISPLAY

| | |
|--------------------|---|
| Panel Size: | 65" |
| Panel Type: | TFT LCD Module with DLED Backlight |
| Display Area (mm): | 1428.48(H) x 803.52 (V) (64.5" diagonal) |
| Aspect Ratio: | 16:9 |
| Resolution: | UHD 3840x2160(Pixels) |
| Colors: | 1.07B colors (10bit) |
| Brightness: | 350 nits (typ.) |
| Contrast Ratio: | 4000:1 |
| Response Time: | 6,5ms |
| Viewing Angles: | H = 178, V = 178 typ. |
| Backlight Life: | 30,000 Hours (Min) |
| Surface Treatment: | Hardness: 9H Anti-glare coating |
| Orientation: | Landscape |

PLATFORM

| | |
|------------|--------------------------|
| Processor: | ARM quad-core Cortex-A55 |
| RAM: | 2GB DDR4 |
| Storage: | 16GB |

TOUCH

| | |
|--------------|-----------------------------------|
| Type/ Tech: | Ultra Fine Touch Technology |
| Touch Point: | 20 points touch, 2 points writing |

INPUT

| | |
|------------|---|
| HDMI: | 2.0 x2 (3840x2160 @60Hz)(HDMI2 port support ARC function) |
| RGB / VGA: | x1 |
| Audio: | x1 (PC audio in) |
| RS232: | x1 |
| OPS: | x1 (Optional Intel Standard OPS) |
| WiFi: | x1 (Optional VB-Wifi-002) |

OUTPUT

| | |
|--------|-------------------|
| Audio: | x1 (Earphone out) |
|--------|-------------------|

LAN

| | |
|-------|----|
| RJ45: | x1 |
|-------|----|

USB

| | |
|---------|--|
| Type A: | USB2.0 Front x2 (SmartPort™ USB);Rear x2 |
| Type B: | x1 for HDMI/VGA touch |

SPEAKERS

| |
|--------------------|
| 10W x 2 subwoofers |
|--------------------|

TOP CAMERA PLATE

| |
|-----|
| Yes |
|-----|

EMBEDDED OS

| |
|-----------|
| Android 9 |
|-----------|

BUNDLE SOFTWARE

| | |
|----------------------------|---|
| Basic Annotation Software: | myViewBoard Whiteboard |
| Pro Annotation Software: | myViewBoard Whiteboard for Windows(Embedded in optional Windows Slot-in PC) |
| Wireless Presentation: | myViewBoard Display |

SPECIAL FEATURES

| | |
|--|--|
| All-in-one USB port: | (combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels. |
| Simple LAN sharing between IFP and slot-in device: | 10/100M for Android & Slot-in PC |
| Light Sensor: | Yes |

POWER

| | |
|--------------|------------------------------|
| Voltage: | 162-240VAC +/- 10% |
| Consumption: | On: 175W (typ.) / Off: <0.5W |

ERGONOMICS

| | |
|---------------------|---------|
| Wall Mount (VESA®): | 600x400 |
|---------------------|---------|

OPERATING CONDITIONS

| | |
|--------------------|-----------------------------|
| Temperature (° C): | 0°C to 40°C |
| Humidity: | 10% ~ 90% RH non-condensing |

DIMENSIONS (W X H X D)

| | |
|------------------------|-----------------------------------|
| Physical (inch / mm): | 1489×897×87 mm / 58.6×35.3×3.4 in |
| Packaging (inch / mm): | 1628×208×1005 mm / 64×8.2×39.5 in |

WEIGHT

| | |
|------------------|----------------|
| Net (lb / kg): | 38.3kg/84.4lb |
| Gross (lb / kg): | 46.0kg/101.4lb |

REGULATIONS

| |
|-------------|
| BIS, CB, CE |
|-------------|

PACKAGE CONTENTS

| |
|--|
| 1. Power cable (3 meters) / 2. Remote control / 3. USB cable (3 meters) / 4. Touch pen x 2 / 5. Quick start guide / 6. RS232 adapter / 7. Clamp x 5 / 8. Webcam plate / 9. Screw x 8 / 10. HDMI cable (3 meters) |
|--|

COMPATIBLE SLOT-IN PC

| |
|-----------------------------|
| VPC12-WPO/VPC25/VPC2C/VPC27 |
|-----------------------------|