

DS-D6055UL-B/S Standing Digital Signage



- **Metallic Appearance** Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.
- **Exquisite Image** Industrial A+ interface, auto-coloring and image-enhancing engine.
- **Variable Materials** Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, number calling, pop-up pictures, etc.
- **Flexible Program Schedule** Free schedule and district display of multiple materials. Multiple play modes with customization support.
- **Centralized Management** Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview. Remote program release and local (USB) program update.
- **Organization Permission** 5-level organization available for managing materials, programs, terminals, and users. Create custom user with precise permission assignment. Multiple permission templates available.
- **Multiple Security Safeguards** 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying. Encryption of data storage and transmission to avoid data tampering. With no default password, users can activate and set initial password to guarantee the password safety.




▪ Specification

	Model	DS-D6055UL-B/S
Display	Viewing Angle	Horizontal: 178°, Vertical: 178°
	Screen Size	54.6 inch
	Active Display Area	1209.6(H) × 680.4(V) mm
	Backlight	D-LED
	Pixel Pitch	0.315(H) × 0.315(V)mm
	Resolution	3840 × 2160
	Brightness	500 cd/m ²
	Color Depth	8bit+FRG
	Contrast Ratio	5700: 1
	Response Time	6.5 ms
	Color Gamut	72% NTSC
	Refresh Rate	60 Hz
Built-in System	Operation System	Android 8.1.0
	CPU	Cortex-A17, 4-core, 1.6 GHz
	Memory	2 GB
	Storage	16 GB EMMC
Interface	Video & Audio Input	AUDIO IN × 1, HDMI IN × 2, VGA IN × 1
	Video & Audio Output	AUDIO OUT × 1
	Network Interface	1 × LAN, Wi-Fi, BT 4.2
	Data Transmission Interface	2 × USB, 1 × TF Card
	Loudspeaker	2 × built-in speaker, 8 Ω 5 W
General	Product Dimensions (W × H × D)	1962.7 (H) × 738 (V) × 450 (D) mm (77.27" × 29.06" × 17.72")
	Power Supply	100 to 240VAC, 50/60 Hz
	Power Consumption	≤ 150 W
	Working humidity	0% to 90%
	Standby Consumption	<0.5W
	Material Type	Supports DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Working temperature	0 °C to 40 °C (32 °F to 104 °F)
	Package Dimensions (W × H × D)	2100 (H) × 916 (V) × 303 (D) mm (82.68" × 36.06" × 11.93")
	Packing List	1 × Screen, 1 × Base, 1 × Key, 1 × Screw Kit, 1 × Installation Manual
	Net Weight	66.190 kg (145.92 lb.)
	Gross Weight	81.190 kg (178.99 lb.)

Available Model

DS-D6055UL-B/S

Dimension

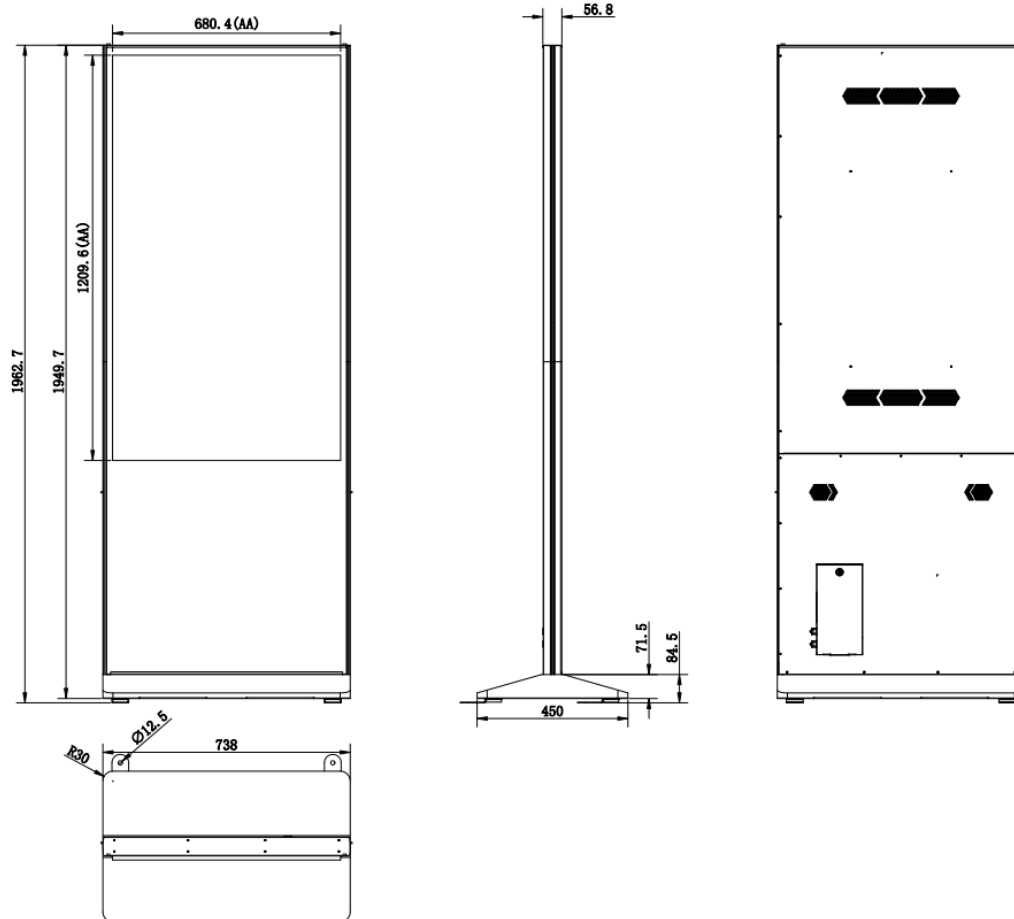

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com