

DS-D6122TH-C/T Classroom Information Release Screen



- 1920×1080P@60Hz full HD, 10-point capacitive touch, and 8-millisecond rapid response
- 27-millimeter-thick body with anti-glare toughened glass, preventing strong light interference and violent destruction
- Built-in light sensor module helps automatically adjust screen brightness to match surrounding lighting conditions, displaying clear pictures with energy saved
- Built-in 2 MP WDR camera captures clear images when facing against the light
- Recognize up to 5 persons in one second, meeting the requirements of quick attendance check for elective class
- Built-in omnidirectional microphone picks up sound within a radius of at least one meter
- Control access control devices through Wiegand protocol, and door locks with relays
- Built-in 13.56 MHz RFID card-swiping module with high response speed, compatible with the standard card of type A and B



▪ Specification



Product Model	
Product Model	DS-D6122TH-C/T
Display	
Viewing Angle	V 178°, H 178°
Screen Size	21.5 inch
Active Display Area	477.06 mm (H) × 268.79 mm (V)
Backlight	TFT-LCD
Resolution	1920 × 1080
Brightness	400 cd/m ²
Color Depth	8 bit
Contrast Ratio	≥ 1000: 1
Response Time	≤ 14 ms
Color Gamut	72%
Reliability	7 × 24 h
Built-in System	
Operation System	Android 6.0.1
Processor	Cortex-A17, 4 Cores, 1.8 GHz
Memory	2 GB
Built-in Storage	16 GB EMMC
Smart	
Lens	2 MP WDR Camera
Face Database	50,000 pictures, JPG format allowed
Face Detection Distance	Up to 5 m (196.86") 0.3 m to 1.5 m (11.81" to 59.06") recommended Adjustable through software
Face Verification Accuracy	> 99%
Face Verification Time	≤ 0.5 s/person
Touch	
Touch Type	Capacitive touch
Glass	3 mm anti-glare toughened glass
Touch Point	10
Interface	
Network Interface	LAN × 1
Data Transmission Interface	USB 2.0 × 2, Built-in Wi-Fi, Bluetooth 4.0, Card-swiping for IC card, Access control linkage
Power	
Standby Consumption	≤ 0.5 W
Power Consumption	≤ 40 W
Working Environment	
Working Temperature	0 °C to 40 °C (30 °F to 104 °F)
Working Humidity	10% to 90%

General	
Gross Weight	8.32 kg (18.34 lb)
Net Weight	7.18 kg (15.83 lb)
Package Dimensions (W × H × D)	660 mm × 584 mm × 113 mm (25.98" × 22.99" × 4.45")
Packing List	21.5-inch screen × 1, L-wrench × 1, power cord × 1, power adapter × 1, torx screw for security × 2, pack of mounting bolts × 2, quick start guide × 1
Product Dimensions (W × H × D)	518.26 mm × 359.99 mm × 27 mm (20.40" × 14.17" × 1.06") (Without wall-mounting plate)
	518.26 mm × 359.99 mm × 28.3 mm (20.40" × 14.17" × 1.11") (With wall-mounting plate)
Temperature Measurement	
Temperature Measurement Accuracy	± 0.5 °C (± 32.9 °F)
Temperature Measurement Distance	0.3 m to 1.5 m (11.81" to 59.06") recommended
Focal Length	3.1 mm
Applicable Scenes	Indoor scenes, no direct light, not directly faced by heat source or air-conditioner outlet
Indoor Temperature Requirement	5 °C to 35 °C (41 °F to 95 °F)
Field Angel	V 50°, H 37°

▪ Available Model

DS-D6122TH-C/T(海外标配),

▪ Dimension

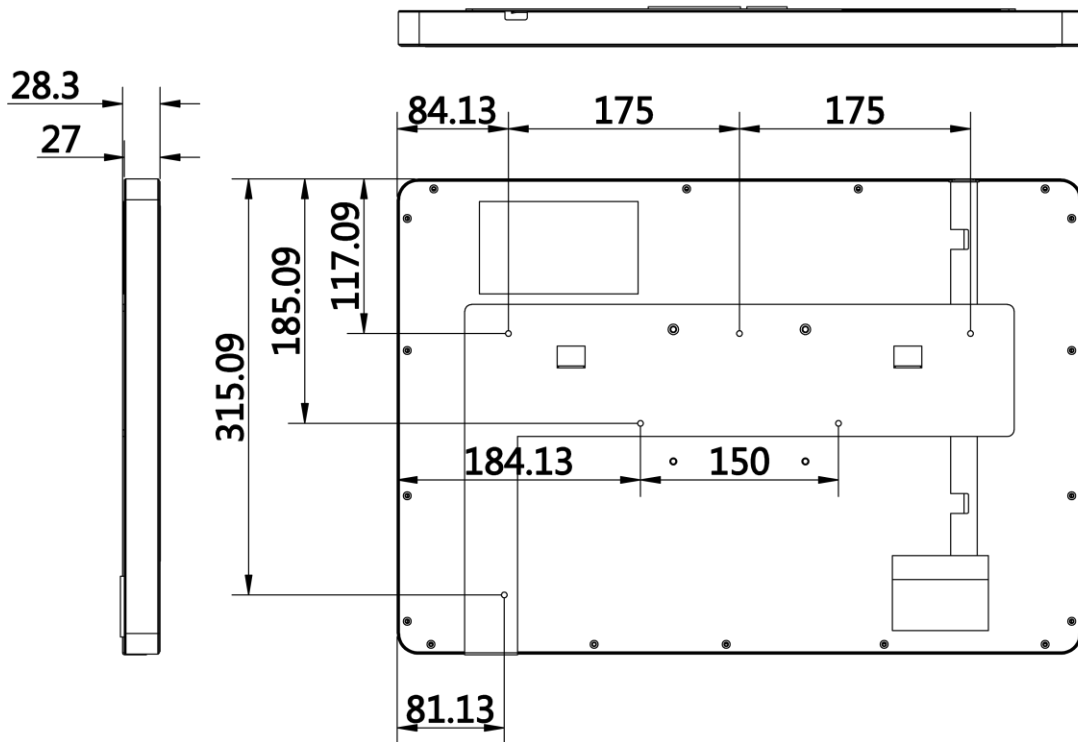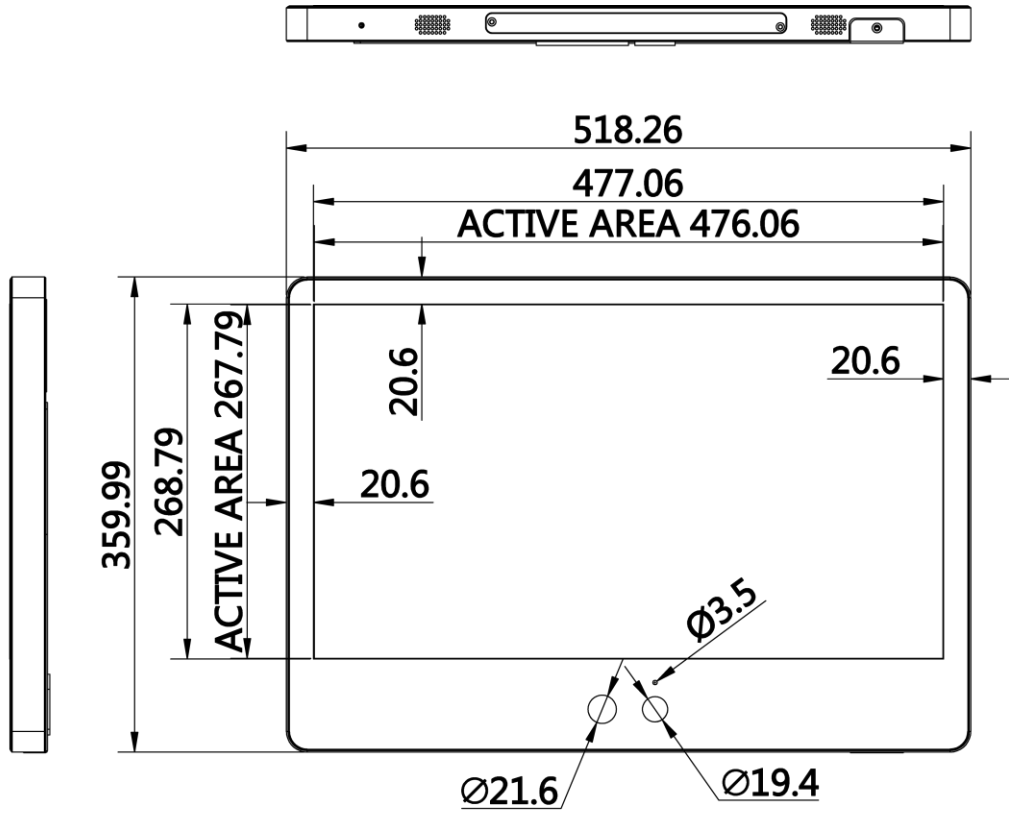



Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com