

DMInteract[®]

From Visualization to Collaboration





DMInteract DM-920

1 Pocket 15 Multi Currency
Sorter With External Display

<https://dminteract.com>
<https://dubaimachines.com>

info@dubaimachines.com
+971-4-3360300

 @dubaimachines
 @dubaimachines




BEST IN CLASS

DMINTERACT DM-920

**1-POCKET 15 MULTI-CURRENCY
COUNTING MACHINE + SORTER
WITH EXTERNAL DISPLAY**

FEATURES

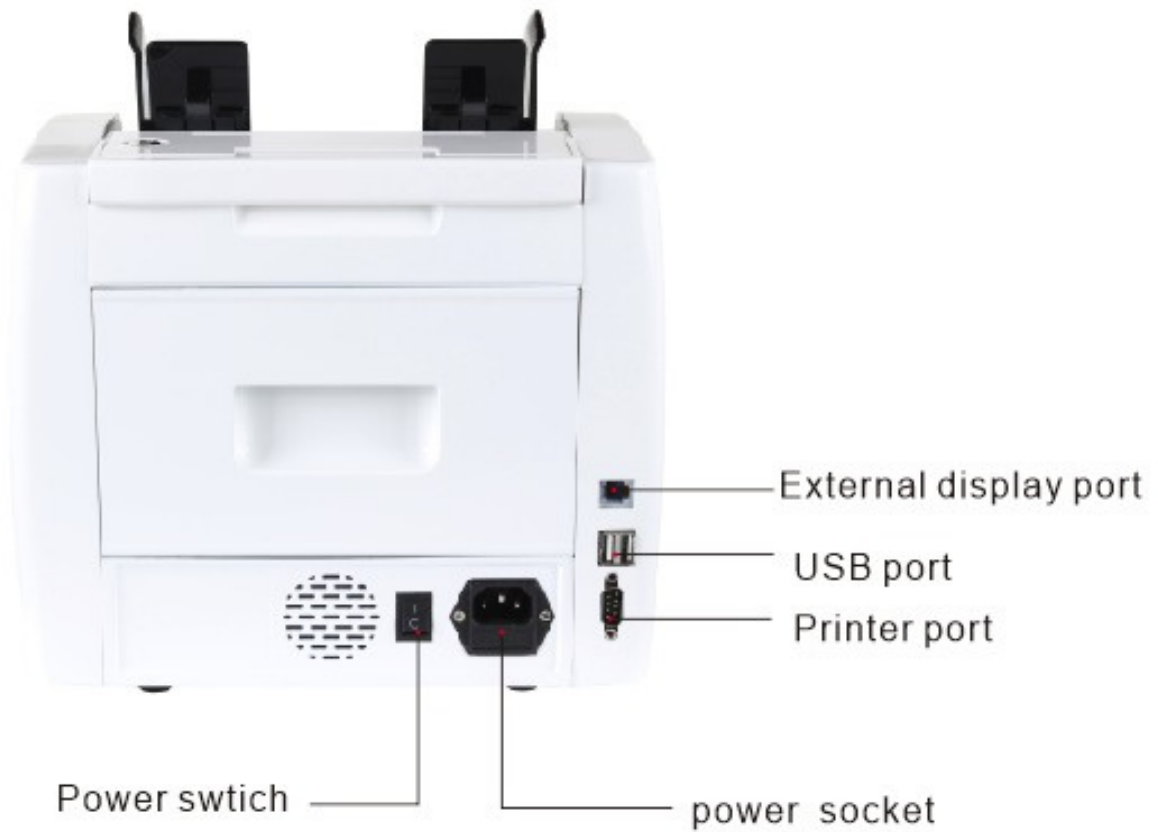

SPECIFICATION

(counting machine)

FEATURES:

- Touch panel and 3.5-inch TFT display
- Mix value counting of multi-currency.
- Auto currency identification
- Counterfeit Detection: Image, Magnetic, Infrared, Ultraviolet
- Error Detection: Double Detection, Half Note Detection, Chain Note Detection
- Serial numbers reading
- Options: Customer Display / Thermal Printer
- Interface: USB, RS-232, RJ-11
- Suitable for USD, EUR, GBP, CNY, AED, HKD, CAD, CHF, etc.

SPECIFICATIONS:

- Hopper Capacity: Max 500 notes
- Stacker Capacity: Max 200 notes
- Counting Speed: 800, 1000notes/min (MDC SDC and CNT MODE); for CNT mode 800,1000,1200 notes/min(CTN MODE only)
- Dimensions: 260x230x240mm
- Power Supply: AC 100-240V 50-60Hz • Power Consumption: <80W
- Size of Countable Notes: 50x110-85x190 mm
- Thickness of Countable Notes: 0.075-0.15
- Counting Display: 4 digits • Batch Display: 3 digits
- Net Weight: 6.5Kgs • Gross Weight: 7.5 Kg
- Unit Box Size: 362x302x295 mm

SPECIFICATION

(receipt printer)

SPECIFICATIONS:

- Printing method: line thermal printing
- Printing paper width: $57.5\pm 0.5\text{mm}$
- Print density: 8 dots/mm, 384 dots/line
- Printing speed: about 90mm/sec (the effective printing content of each line does not exceed 25%)
- Reliability: print head life: 100km
- Effective printing width: 48mm
- Interface form
- Serial port interface: DB 9 core socket (female type), supports XON/XOFF and RTS/CTS protocols. Wave Bit rate: 1200~115200bps adjustable. Data structure: 1 start bit + 7 or 8 data bits + 1 bit stop bit.
- Barcode printing command: support UPCA, UPC-E, EAN-13 , EAN, CODE39, ITF25, CODABAR, CODE93, CODE128 barcode printing

POWER REQUIREMENTS

- DC12V \pm 10%, 2A (one core).

WORKING ENVIRONMENT

- Operating temperature: 0~50°C
- Storage temperature: 20~60°C
- Operating relative humidity: 10-90%
- Machine Dimension: 184(L) X 129 (W) X 101(H) mm



SPECIAL OFFER

**ORDER
NOW**



WWW.DUBAIMACHINES.COM

WWW.DMINTERACT.COM

+971-4-3360300 - INFO@DUBAIMACHINES.COM