

DMInteract[®]

Video Walls: Unleash the Visual Power



PRODUCT OVERVIEW

DMInteract stands out as a state-of-the-art display solution, boasting a range of enticing features for an unparalleled viewing experience. With screen sizes from 46 to 65 inches, a sleek ultra-thin design, and options for minimal splicing gaps or a bezel-less display, it delivers stunning visuals. The LED backlighting enhances color vibrancy and contrast, complementing the maximum resolution of 1920×1080. Versatility is key, offering wide viewing angles, multiple installation options, and seamless connectivity through interfaces like VGA, DVI, HDMI, and USB. With a robust service life of approximately 60,000 hours, DMInteract combines longevity and exceptional image quality. Advanced control options, including Serial Port (RS232) and remote control, as well as third-party control through WI-FI or smartphones, make DMInteract a sophisticated and immersive display solution at the forefront of innovation.




MULTIPLE SCREEN SIZES:

Choose from a variety of screen sizes, including 46 inches, 49 inches, 55 inches, and 65 inches, providing options for different spaces and preferences.

MINIMAL SPLICING GAP:

Experience seamless visuals with splicing gaps as small as 0.00mm, 0.88mm or 3.5mm bezel design, providing an immersive and uninterrupted viewing experience.

Ultra-narrow border design
Perfect visual feast

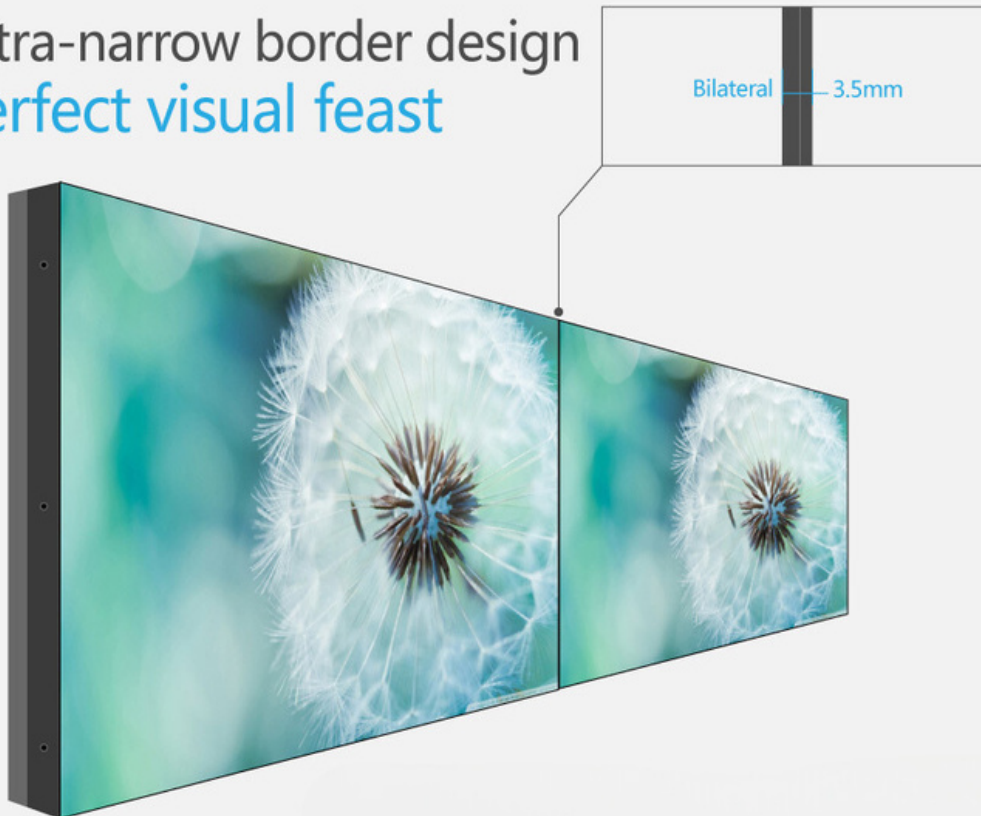

Bezel Less, 0.88mm OR 3.5mm

Parameters of stitching series stitching unit



4K SUPPORTED FULL HD RESOLUTION:

Benefit from a maximum resolution of 1920×1080 with backward compatibility, ensuring crisp and clear images for an enhanced viewing experience.



Full HD



178 Viewing Angle



Tempered Glass




LED Backlight



Narrow Bezel

178° VIEW OF ANGLE:

Enjoy a comfortable viewing experience from various angles with a 178° viewing angle, ensuring that the content looks impressive from virtually any perspective.

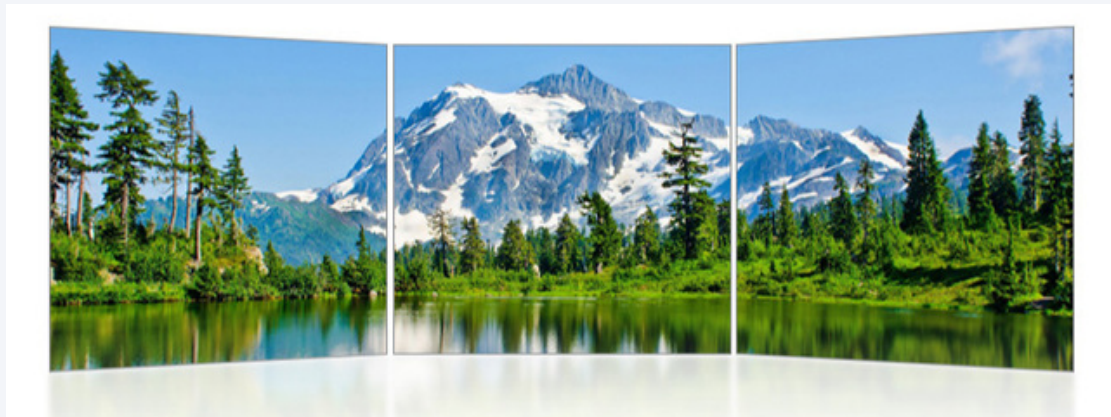

PRODUCT SPECIFICATION

Brand Name	DMInteract
Multiple Screen Sizes	46 inches, 49 inches, 55 inches, and 65 inches
Splicing Gap	3.5mm, 0.88mm & Bezel Less
Backlight	LED
Aspect Ratio	16:9
Contrast Ratio	4500:1
Max Resolution	1920×1080 (Supported 4K)
Brightness	500cd/m ²
Color Saturation:	97%
Response Time:	6ms
Viewing Angle	178°
Service Life	About 60,000 Hours

PRODUCT SPECIFICATION

Panel Color	Black
Signal Format	PAL/NTSC Adapting 480I, 576I, 720I, 720P, 1080I, 1080P
Interface Input	Power Connector, VGA, DVI, HDMI, CVBS, USB
Interface Output	CVBS, DVI
Control Port Input	Serial Port (RS232)
Control Port Output	Serial Port (RS232) x 2
Panel Control	Remote Control
Third Party Control	Wi-Fi, Smartphone, iPad (Customized)
Operating Power	$\leq 200W$
Standby Power	$\leq 3W$
Language	Multi-Language
Operating Temperature	0°C ~ 50°C
Storage Temperature	-10°C ~ 60°C

A decorative background in the top-left corner consisting of several overlapping teal-colored triangles and polygons of varying shades, creating a modern, abstract geometric pattern.

Order Now

FROM OUR STORE