

BenQ MH560 |Full HD Business Projector for Meeting Room

3,800 ANSI Lumens, Contrast Ratio : 22,000:1, Exclusive Data Review Mode, Anti Dust Sensor



**Dual
HDMI™**



**PRESENTATION
MODE**

**INFO
GRAPHIC
MODE**

**DATA
REVIEW
MODE**



Category	Spec Attribute	MH560
Display	Projection System	DLP Single 0.65" Full HD
	DMD type	0.65" 1080P
	Native Resolution	1920x 1080 pixels
	Brightness	3800 ANSI Lumens
	Contrast Ratio*	22,000:1
	Display Color	30 Bits/1.07 Billion Colors
	Aspect Ratio	Native 16:9 (5 aspect ratio selectable)
	Light Source	Lamp
	Light Source life*	Normal 6000 hr, Economic 10000 hr, SmartEco 10000 hr, LampSave 15000hr
Optical	Throw Ratio	1.49~1.64
	Zoom Ratio	1.1x
	Keystone Correction	Auto ID, Vertical +/- 40 degrees
	Projection Offset	110%
	Projection Size	70"~150"
Audio	Built-in Speaker	10Wx1
Special Feature	Security	Security Bar, Kensington lock
	Feature	ID Auto Keystone, High Brightness, Spreadsheet mode, Bright Mode, Presentation Mode, Infographic Mode, Video Mode, Srgb Mode
Compatibility	Resolution Support	VGA(640 x 480) to WUXGA_RB(1920 x 1200)
	Horizontal Frequency	15K~102KHz
	Vertical Scan Rate	23 ~ 120 Hz
	HDTV Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM, SDTV, (480i/576i), EDTV (480p/576p), HDTV (720p, 1080i/p 60Hz)
Connectivities	I/O Port	HDMI-1 x1
		HDMI-2 x1
		USB TypeA x1 (1.5A power) x1
		USB Type min B (For FW upgrade) x1
		Computer In (D-sub 15pin, Female) x1
		Monitor out (D-sub 15pin,Female) x1
		RS232 In (D-sub 9pin, male) x1
		Composite Video (RCA) x1
		S-Video x1
		Audio in (mini jack) x1
		Audio out (mini jack) x1
		Kensington anti-theft lock slot x1
		Power In x1
Power	Power Consumptions(Max/Normal/Eco)	Max 280W, Normal 260W, Eco 215W
	Standby Power consumption	Normal < 0.5Watts.
	Power Supply	100 ~ 240V AC
Dimension and Weight	Product Dimensions (WxHxD)	296 x 120 x 221 mm
	Product Weight	2.3kg +/- 200g
Operation Condition	Noise Level(Normal/Eco)	34 / 29 dBA
	Operating Temperature*	0 ~ 40°C
Accessories	Accessories (Standard)	QSG(4J.JND01.001)
		Remote Control (5J.JND06.001)
		AAA Batteryx2
		VGA cable (1.5m)
		Power Cord (1.8m)
	Accessories (Optional)	Warranty card (by Region)
		Spare Lamp Kit (5J.JND05.001)
		3D Glasses (5J.J9H25.002)
		Ceiling mount
		Qcast Mirror(5A.JH328.10X)
OSD	On Screen Display Language	WDC10
		WDC20

* The Contrast is measure by Full On Full Off standard.

** LightSource life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Connectivity




- | | Qty |
|-------------------------------------|-----|
| 1 HDMI-I | 1 |
| 2 HDMI-2 | 1 |
| 3 USB TypeA (1.5A power) | 1 |
| 4 USB Type min B (For FW upgrade) | 1 |
| 5 Computer In (D-sub 15pin, Female) | 1 |
| 6 Monitor out (D-sub 15pin, Female) | 1 |
| 7 RS232 In (D-sub 9pin, male) | 1 |
| 8 Composite Video (RCA) | 1 |
| 9 S-Video | 1 |
| 10 Audio in (mini jack) | 1 |
| 11 Audio out (mini jack) | 1 |
| 12 Kensington anti-theft lock slot | 1 |
| 13 Power In | 1 |

Ceiling / Wall Mount Chart

Ceiling/Wall mount installation diagram


Ceiling/Wall mount screw: M4
(Max L = 25 mm; Min L = 20 mm)

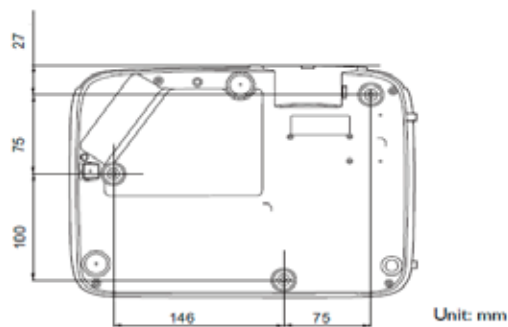

Dimensions

Dimensions

296 mm (W) x 120 mm (H) x 221 mm (D)

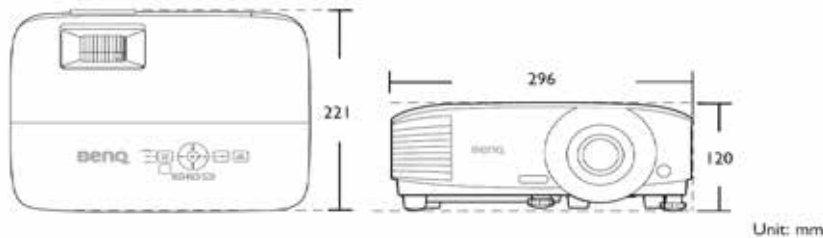

DLP®
T X S INSTRUMENTS

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE



Corporate Office: BenQ India Pvt. Ltd.

9B Building, IIIrd Floor, DLF Cyber City, DLF Phase III, Gurgaon Haryana, India - 122002,

Tel: +91 124-4501400, Fax: +91 124-4501400

www.BenQ.in, Customer Care No. 1800-419-9979, E-mail: Sales.EnquiryIn@BenQ.com



2 Years Onsite Warranty for Projector.
Lamp Warranty of 1 year or 1000 Hrs whichever is earlier

www.BenQ.in | Like BenQ India on

