

Targus

UNIVERSAL USB 3.0 DV1K-2K COMPACT DOCKING STATION



QUICK START GUIDE

410-3350-001A / DOCK120EUZ

Contents


- Targus Universal USB 3.0 DV1K-2K Compact Docking Station
- USB 3.0 cable
- AC Power adaptor



Features and specifications are subject to change without notice. Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries. All trademarks and registered trademarks are the property of their respective owners. ©2015 Manufactured or Imported by Targus Europe Ltd, Feltham, Middlesex TW14 8HA, UK.

Workstation Setup

1. Connect all peripheral devices to the docking station.




2. Connect the Targus Universal Docking Station to your host device.



Specifications

- DisplayPort (DP++)
- HDMI port
- DVI port (supports dual display mode; select any 2 out of 3 video output ports)
- 2 x USB 3.0 downstream ports (port marked with $\overleftrightarrow{+}$ supports BC 1.2 and iOS device charging up to 1.5A max)
- 2 x USB 2.0 downstream ports
- Gigabit Ethernet
- Audio In/Out ports (3.5mm headset connector)
- Security lock slot
- USB 3.0 cable
- 20W AC power adaptor

Docking Station Diagram

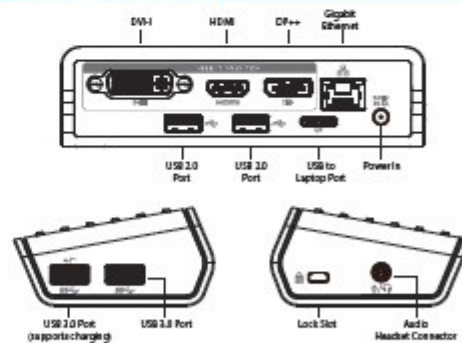

System Requirements

Hardware

- USB Port (USB 3.0 recommended)

Operating System (any of the following)

- Microsoft Windows 7, Windows 8, Windows 8.1, or Windows 10 (32/64-bit)
- Mac OS X v10.8, v10.9, or v10.10
- Android 5.0, 5.1

Visit www.targus.com for a list of the latest compatible operating systems