



# BenQ **ULTRA-THIN** Double Sided Signage

Double Your Visibility, Double Your Versatility, Double Your Possibilities!



## BenQ **ULTRA-THIN** Double Sided Signage



Because it matters

# BenQ ULTRA-THIN Double Sided Signage

DH551C / DH551F



## Ultra-Slim Panel Design

Utilizing a single panel to achieve dual-sided display capability, BenQ double-sided displays innovate the market with the world's slimmest aero-thin panel design set at less than 23.4mm – about the width of your thumb. This state-of-art technological breakthrough enables installation and placement at the most unexpected places to generate the most attention.

## High Brightness for Well-Lit Venues

Both sides of the ultra-slim display generate up to 700 nits of high brightness to fully support unique indoor and semi-outdoor applications.

## 24/7 Nonstop Operation


An amazing 50,000-hour life translates to years of nonstop signage service and reliable industrial-grade performance far more economical than consumer models.

## Diverse Mounting Capability

With various mounting accessories, BenQ dual-sided displays can be installed into surprising and novel locations to delight and inspire customers. With lightweight, ultra-slim, and universally mountable design, the possibilities to create new applications are endless.

## Specifications

		DH551C	DH551F
Panel	Screen Size	55"	55"
	Backlight/Lightsource	E-LED	E-LED
	Active Area (horizontal × vertical)(mm)	1,209.6 × 680.4 mm	1,209.6 × 680.4 mm
	Resolution (pixels)	FHD 1920 × 1080	FHD 1920 × 1080
	Brightness (typical)	700 nits / 700 nits	700 nits / 700 nits
	Contrast Ratio (typical)	3000:1	3000:1
	Viewing Angle (horizontal/vertical)	178° / 178°	178° / 178°
	Aspect Ratio	16:9	16:9
	Light Life (typical)	50,000hrs	50,000hrs
	Display Orientation	Landscape / Portrait	Landscape / Portrait
Connectivity	HDMI In/Out	x2 / No	x2 / No
Power	AC/DC In	AC	DC
	AC Power Switch	x1 (on Bottom housing)	x1 (on Power box)
	Voltage	100V ~ 240V, 50Hz / 60Hz	100V ~ 240V, 50Hz / 60Hz
	Power Consumption (typical/standby)	≤ 230W / ≤ 2W	≤ 230W / ≤ 2W
Mechanical	Dimension (WxHxD) (mm)	2,029.7 × 861.9 × 62.4mm	1,515.9 × 856.8 × 23.4mm
	Bezel Width (top/bottom/left/right) (mm)	64.2 / 53.7 / 86.7 / 86.7mm	64.2 / 239.1 / 86.7 / 86.7mm
	Weight (w/o Packing/ w/ Packing) (kg)	Display: 41.0kg / 55.0kg Stand: 53.5kg / 62.0kg	49.5 kg / 63.5 kg
Environment	Operation Temperature	0° C ~ 40° C	0° C ~ 40° C
	Storage Temperature	-10° C ~ 50° C	-10° C ~ 50° C"
	Usage (Hour/Day)	24/7	24/7
OSD	On-Screen Display Languages	English / Spanish / French / German / Italian / Portuguese / Russian / Japanese / Simplified Chinese / Traditional Chinese / (10 Languages)	English / Spanish / French / German / Italian / Portuguese / Russian / Japanese / Simplified Chinese / Traditional Chinese / (10 Languages)
Software	X-Sign (please check X-Sign website for detailed compatibility info.)	Yes	Yes
Accessory	Remote Control	Yes	Yes
	Power Cord (by region)	Yes	Yes
	HDMI Cable	Yes (x2)	Yes (x2)
	Quick Start Guide	Yes	Yes
	User's Manual Electronic File	Yes	Yes
	Stand	Yes	N/A

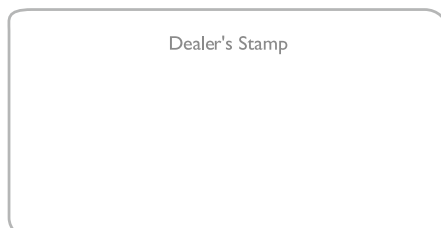

Because it matters