

<b>DISPLAY SIZE (IN.)</b> 24	<b>PANEL TYPE</b> TN
<b>RESOLUTION</b> 1920 x 1080	<b>STATIC CONTRAST RATIO</b> 1,000:1

DISPLAY	
<b>DISPLAY SIZE (IN.)</b> 24	<b>VIEWABLE AREA (IN.)</b> 24
<b>PANEL TYPE</b> TN	<b>RESOLUTION</b> 1920 x 1080
<b>RESOLUTION TYPE</b> HD (1920x1080)	<b>STATIC CONTRAST RATIO</b> 1,000:1
<b>DYNAMIC CONTRAST RATIO</b> 120,000,000:1	<b>LIGHT SOURCE</b> LED
<b>BRIGHTNESS</b> 350 cd/m2	<b>COLORS</b> 16.7M
<b>COLOR SPACE SUPPORT</b> 6 bit + A-FRC	<b>ASPECT RATIO</b> 16:9
<b>RESPONSE TIME (TYPICAL GTG)</b> 5ms	<b>RESPONSE TIME (GTG W/OD)</b> 1ms
<b>VIEWING ANGLES</b> 170° horizontal, 160° vertical	<b>BACKLIGHT LIFE (HOURS)</b> 30,000
<b>PANEL SURFACE</b> Anti-glare, Hard coating (3H)	<b>REFRESH RATE (HZ)</b> 144
<b>ADAPTIVE SYNC</b> AMD FreeSync	

COMPATIBILITY	
<b>PC RESOLUTION (MAX)</b> 1920 x 1080	<b>MAC® RESOLUTION (MAX)</b> 1920 x 1080

CONNECTOR	
<b>USB 3.0 TYPE A</b> 2	<b>USB 3.0 TYPE B</b> 1
<b>3.5MM AUDIO OUT</b> 1	<b>HDMI 1.4</b> 2
<b>DISPLAY PORT</b> 1	

**AUDIO****INTERNAL SPEAKERS**

2W (x2)

**POWER****ECO MODE (CONSERVE)**

18W

**ECO MODE (OPTIMIZED)**

24W

**CONSUMPTION (TYPICAL)**

30W

**CONSUMPTION (MAX)**

32W

**VOLTAGE**

100-240 VAC, 50-60Hz

**STAND-BY**

0.5W

**POWER SUPPLY**

Internal

**ADDITIONAL HARDWARE****KENSINGTON LOCK SLOT**

1

**CONTROLS****PHYSICAL CONTROLS**

Key Buttons 1, 2, 3, 4, 5, 6 (Power)

**ON SCREEN DISPLAY**

Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Advanced Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

**OPERATING CONDITIONS****TEMPERATURE**

32-104° F (0 - 40° C)

**HUMIDITY (NON-CONDENSING)**

20-90%

**MOUNT****VESA COMPATIBLE**

100 x 100 mm

**VIDEO SIGNAL****FREQUENCY HORIZONTAL**

HDMI: 15 ~ 160KHz, DisplayPort: 30 ~ 160KHz

**FREQUENCY VERTICAL**

HDMI: 24 ~ 144Hz, DisplayPort: 48 ~ 146Hz

**VIDEO INPUT****DIGITAL SYNC**

TMDS for HDMI (v1.4), PCI-E for DisplayPort (v1.2)

**ERGONOMICS****HEIGHT ADJUST (MM)**

120

**SWIVEL**

45°

**PIVOT (RIGHT/LEFT)**

90° / 0°

**TILT (FORWARD/BACK)**

5° / 20°

**WEIGHT (IMPERIAL)****NET (LBS)**

14.8

**NET WITHOUT STAND (LBS)**

7.5

**GROSS (LBS)**

18.7

**WEIGHT (METRIC)****NET (KG)**

6.7

**NET WITHOUT STAND (KG)**

3.4

**GROSS (KG)**

8.5

**DIMENSIONS (IMPERIAL) (WXHxD)****PACKAGING (IN.)**

25.2 x 15.6 x 8.2

**PHYSICAL (IN.)**

22.3 x 17.1 x 9.4

**PHYSICAL WITHOUT STAND (IN.)**


22.3 x 13.4 x 2.4

DIMENSIONS (METRIC) (WXHXD)	
<b>PACKAGING (MM)</b> 640.0 x 396.0 x 207.0	<b>PHYSICAL (MM)</b> 566.0 x 433.9 x 239.2
<b>PHYSICAL WITHOUT STAND (MM)</b> 566.0 x 341.0 x 60.2	

GENERAL	
<b>REGULATIONS</b> CE, CB, RoHS, ErP, REACH, EEL, WEEE, CU, UkrSEPRO, BSMI, KC, e-standby	<b>PACKAGE CONTENTS</b> XG240R Display, 1 x Power Cable, 1 x DisplayPort Cable, 1 x USB3.0 Cable, 1 x Quick Start Guide
<b>RECYCLE/DISPOSAL</b> Please dispose of in accordance with local, state or federal laws.	<b>WARRANTY</b> Three-year limited warranty on parts, labor and backlight

### DIMENSIONS

22.3 x 17.1 x 9.4 in / 566.0 x 433.9 x 239.2 mm

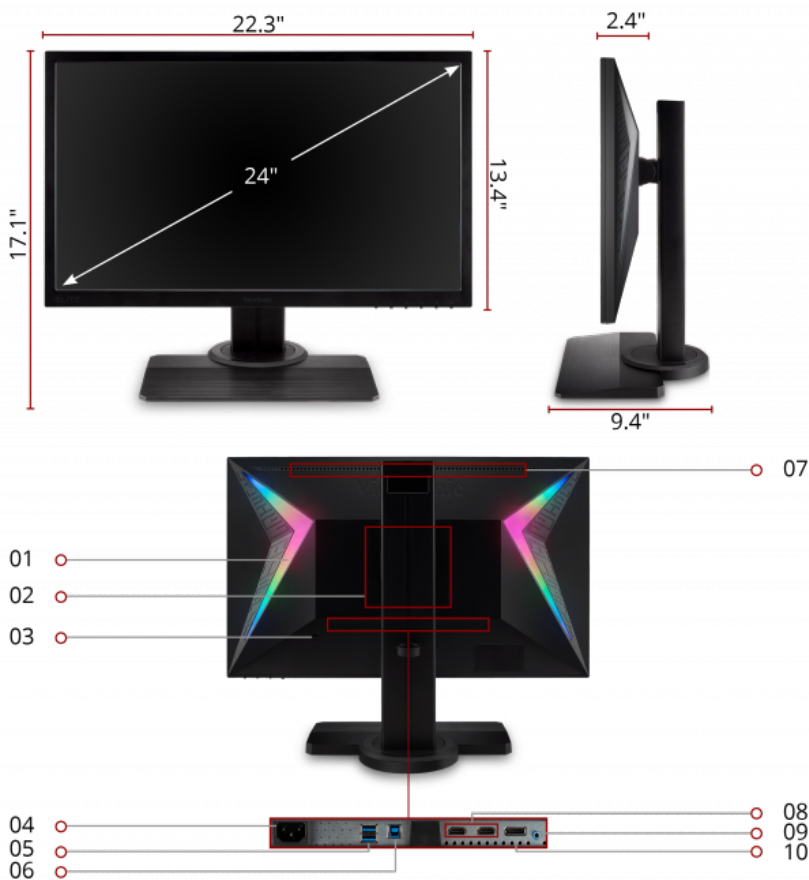

RGB Lighting VESA Compatible Wall Mount 100 x 100 mm Kensington® Lock Slot AC In USB 3.0 Type A x2 USB 3.0 Type B  
Internal Speakers HDMI 1.4 x2 Audio Out DisplayPort In