

| | |
|---|--|
| RESOLUTION 1280 x 800 | THROW RATIO 1.2 - 1.6 |
| THROW DISTANCE 2.6 - 33.3 ft / 0.78 - 10.14 m | BRIGHTNESS (LUMENS) 5,000 ANSI |

| DISPLAY | |
|--|--|
| TYPE DLP Lamp | RESOLUTION TYPE WXGA (1280x800) |
| RESOLUTION 1280 x 800 | BRIGHTNESS (LUMENS) 5,000 ANSI |
| DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m | THROW DISTANCE 2.6 - 33.3 ft / 0.78 - 10.14 m |
| THROW RATIO 1.2 - 1.6 | KEystone Vertical (+/- 40°) |
| LENS 1.3x Manual optical zoom / manual optical focus | LIGHT SOURCE (WATT) 370 |
| LIGHT SOURCE LIFE, NORMAL (HOURS) 2000 | LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 2500 |
| COLOR DEPTH 1.07B Color (R/G/B 10bit) | DYNAMIC CONTRAST RATIO 5,000:1 |
| ASPECT RATIO 16:10 | |

| VIDEO SIGNAL | |
|---|---------------------------------------|
| FREQUENCY HORIZONTAL 15K~102KHz | FREQUENCY VERTICAL 23~120Hz |

| COMPATIBILITY | |
|---|---|
| PC RESOLUTION (MAX) 1920 x 1200 | MAC® RESOLUTION (MAX) 1920 x 1200 |

| CONNECTOR | |
|------------------------------------|--------------------------------|
| USB 2.0 TYPE A 1 | USB 2.0 TYPE B 1 |
| ETHERNET LAN (RJ45) 1 | 3.5MM 12V TRIGGER 1 |
| 3.5MM AUDIO OUT 1 | 3.5MM AUDIO IN 2 |
| CONTROL (RS232) 1 | HDMI 2 |
| VGA IN 2 | VGA OUT 1 |
| COMPOSITE RCA VIDEO IN 1 | S-VIDEO IN 1 |
| MINI USB 1 | RCA AUDIO IN (L/R) 1 |
| 3D VESA 1 | IR OUT 1 |

| AUDIO | |
|--------------------------------------|--|
| INTERNAL SPEAKERS 10W (x2) | |

| POWER | |
|---|----------------------------------|
| VOLTAGE 100-240V+/- 10%, 50/60Hz AC | CONSUMPTION (MAX) 574W |
| STAND-BY <0.5W | |

| CONTROLS | |
|---|--|
| PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source | ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality) |

| OPERATING CONDITIONS | |
|----------------------|--|
|----------------------|--|

| | |
|---|---|
| TEMPERATURE 32-104° F (0 - 40° C) | HUMIDITY (NON-CONDENSING) 0-90% |
|---|---|

| ADDITIONAL HARDWARE | |
|---------------------|--|
|---------------------|--|

| | |
|----------------------------------|--|
| KENSINGTON LOCK SLOT 1 | |
|----------------------------------|--|

| WEIGHT (IMPERIAL) | |
|-------------------|--|
|-------------------|--|

| | |
|--------------------------|----------------------------|
| NET (LBS) 13.7 | GROSS (LBS) 18.7 |
|--------------------------|----------------------------|

| WEIGHT (METRIC) | |
|-----------------|--|
|-----------------|--|

| | |
|------------------------|--------------------------|
| NET (KG) 6.2 | GROSS (KG) 8.5 |
|------------------------|--------------------------|

| DIMENSIONS (IMPERIAL) (WXHxD) | |
|-------------------------------|--|
|-------------------------------|--|

| | |
|--|--|
| PACKAGING (IN.) 22.7 x 21.1 x 10.2 | PHYSICAL (IN.) 18.5 x 12.4 x 5.5 |
|--|--|


| DIMENSIONS (METRIC) (WXHxD) | |
|-----------------------------|--|
|-----------------------------|--|

| | |
|--|---|
| PACKAGING (MM) 577 x 537 x 260 | PHYSICAL (MM) 470 x 316 x 140 |
|--|---|

| GENERAL | |
|--|--|
| AV CONTROL | REGULATIONS |
| AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified | FCC, ROHS, cTUVus |
| PACKAGE CONTENTS | WARRANTY |
| PG800W projector, power cable, VGA cable, remote control with AAA batteries, Quick Start Guide | Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration). |
| RECYCLE/DISPOSAL | |
| Please dispose of in accordance with local, state or federal laws. | |

DIMENSIONS

18.5 x 12.4 x 5.5 in / 470 x 316 x 140 mm

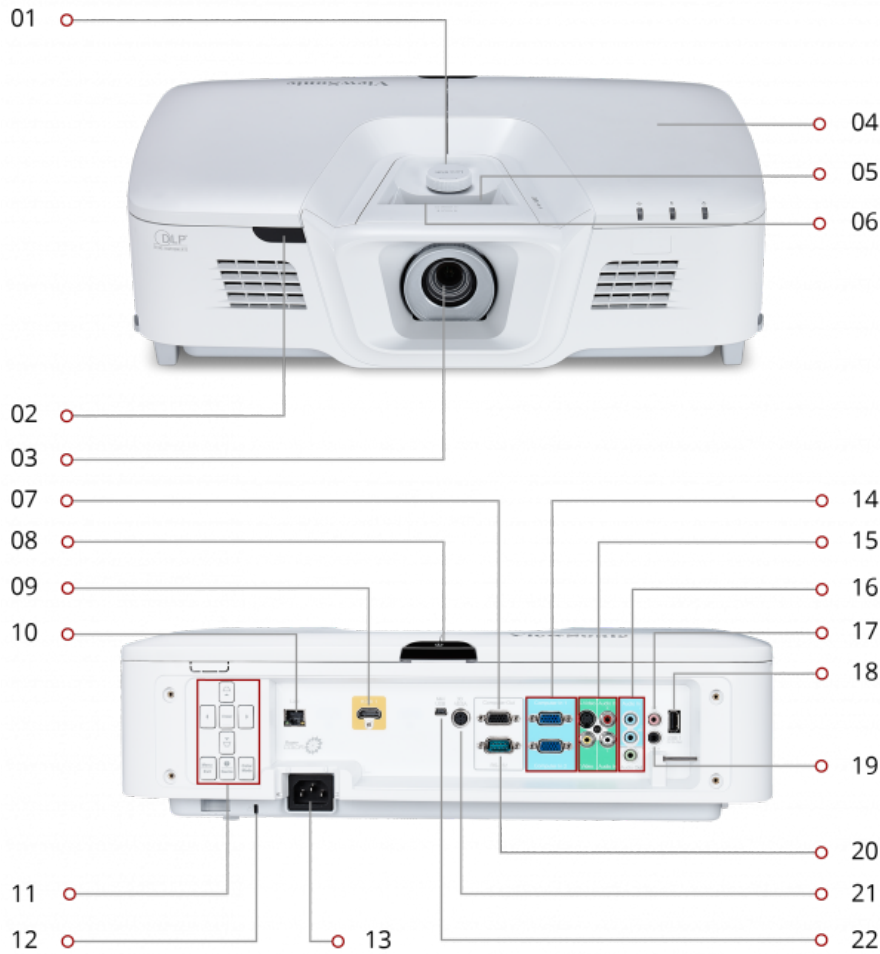

Vertical Lens Shift IR Remote Sensor Projection Lens PortAll™ (HDMI/MHL) Zoom ring Focus ring Monitor Out
 Power Switch HDMI LAN Menu Controls Kensington® Lock Slot AC In VGA (x2) Audio/Video In
 Audio In/Out IR Passthrough USB 12V DC Trigger RS232