

RESOLUTION 1024 x 768	THROW RATIO 1.3 - 2.21:1
THROW DISTANCE 2.6 – 44.2 ft / 0.79m-13.47 m	BRIGHTNESS (LUMENS) 6,200 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE XGA (1024x768)
RESOLUTION 1024 x 768	BRIGHTNESS (LUMENS) 6,200 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 2.6 – 44.2 ft / 0.79m-13.47 m
THROW RATIO 1.3 - 2.21:1	KEystone Vertical (± 30°) / Horizontal (± 25°)
LENS 1.7x Manual optical zoom / manual optical focus	LIGHT SOURCE (WATT) 370
LIGHT SOURCE LIFE, NORMAL (HOURS) 1500	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 3500
COLOR DEPTH 30 bits, 1.07B Color (10+10+10)	DYNAMIC CONTRAST RATIO 8,000:1
ASPECT RATIO 4:3	LENS SHIFT Vertical (-10.5%/+3%) / Horizontal (+/- 3.8%)

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15-100kHz	FREQUENCY VERTICAL 24-120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) Up to 1920x1080	PC RESOLUTION (MIN) Up to 1920x1080

CONNECTOR	
USB 2.0 TYPE A 1	USB 2.0 TYPE B 1
ETHERNET LAN (RJ45) 1	3.5MM AUDIO OUT 1
3.5MM AUDIO IN 3	CONTROL (RS232) 1
HDMI 1.4 1	HDMI MHL 1
DVI-D 1	VGA IN 2
VGA OUT 1	COMPOSITE RCA VIDEO IN 1
S-VIDEO IN 1	RCA AUDIO IN (L/R) 1
RCA AUDIO OUT 1	3D VESA 1
WIRED REMOTE IN 1	WIRED REMOTE OUT 1
5-BNC 1	

AUDIO	
INTERNAL SPEAKERS 7W (x2)	

POWER	
VOLTAGE 100~240VAC (Auto Switching), 50-60Hz (universal)	CONSUMPTION (MAX) 480W
STAND-BY <0.5W	

CONTROLS**PHYSICAL CONTROLS**

Power, H/V lens shift, focus, zoom, keystone/arrow keys,
left/blank, right/panel key lock, menu/exit, mode/enter,
source

ON SCREEN DISPLAY

Display, Image, Video, Audio, Basic, Advanced

OPERATING CONDITIONS**TEMPERATURE**

41-104° F (5 - 40° C)

HUMIDITY (NON-CONDENSING)

10-85%

ADDITIONAL HARDWARE**KENSINGTON LOCK SLOT**

1

WEIGHT (IMPERIAL)**NET (LBS)**

18.26

GROSS (LBS)

27.31

WEIGHT (METRIC)**NET (KG)**

8.29

GROSS (KG)

12.4

DIMENSIONS (IMPERIAL) (WXHxD)**PACKAGING (IN.)**

22.68 x 17.17 x 11.46 in.

PHYSICAL (IN.)

17.51 x 12.81 x 5.82 in.

DIMENSIONS (METRIC) (WXHxD)**PACKAGING (MM)**

576 x 436 x 291 mm


PHYSICAL (MM)

445 x 325.5 x 147.8 mm

GENERAL	
<p>AV CONTROL</p> <p>AMX Certified, Crestron Certified</p>	<p>REGULATIONS</p> <p>UL, cUL, FCC, CE, EMC, CB, ROHS, REACH, SVCH, WEEE, ErP, Mexico NOM/ENERGY, PSB, RCM, CCC</p>
<p>PACKAGE CONTENTS</p> <p>Pro9510L projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)</p>	<p>WARRANTY</p> <p>Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).</p>
<p>RECYCLE/DISPOSAL</p> <p>Please dispose of in accordance with local, state or federal laws.</p>	

DIMENSIONS

17.51 x 12.81 x 5.82 in / 445 x 325.5 x 147.8 mm

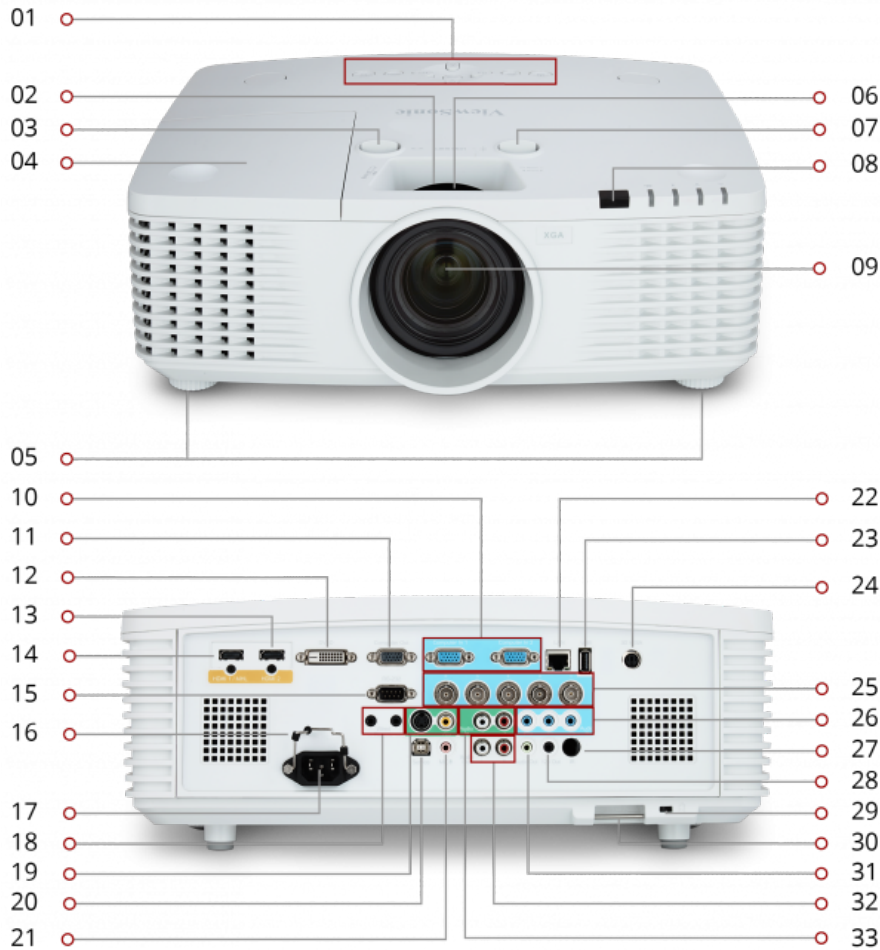

Menu Controls Zoom Ring Horizontal Lens Shift Lamp Access Elevation Feet Focus ring Vertical Lens Shift

IR Remote Sensor Projection Lens VGA (x2) Monitor Out DVI-D HDMI In HDMI/MHL In RS232

Power Cable Lock AC In Video/S-Video In Wired Remote In/Out USB Service Port Mic In LAN USB 2.0 Type A

3D VESA BNC In PC Audio In IR In/Out 12V DC Trigger Kensington Lock Slot Security Bar Audio Out
RCA Audio Out RCA Audio In