

<b>RESOLUTION</b> 1920 x 1080	<b>THROW RATIO</b> 1.5 - 1.8
<b>THROW DISTANCE</b> 3.2 - 38.4 ft / 1 - 11.7 m	<b>BRIGHTNESS (LUMENS)</b> 4,000 ANSI

<b>DISPLAY</b>	
<b>TYPE</b> DLP Lamp	<b>RESOLUTION TYPE</b> HD (1920x1080)
<b>RESOLUTION</b> 1920 x 1080	<b>BRIGHTNESS (LUMENS)</b> 4,000 ANSI
<b>DISPLAY SIZE (IN.)</b> 30 - 300 in. / 0.76 - 7.62 m	<b>THROW DISTANCE</b> 3.2 - 38.4 ft / 1 - 11.7 m
<b>THROW RATIO</b> 1.5 - 1.8	<b>KEystone</b> Vertical (+/- 40°)
<b>LENS</b> 1.2x Manual optical zoom / manual optical focus	<b>LIGHT SOURCE (WATT)</b> 240
<b>LIGHT SOURCE LIFE, NORMAL (HOURS)</b> 4000	<b>LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS)</b> 15000
<b>COLOR DEPTH</b> 1.07B Color (R/G/B 10bit)	<b>DYNAMIC CONTRAST RATIO</b> 12,000:1
<b>ASPECT RATIO</b> 16:9	

<b>VIDEO SIGNAL</b>	
<b>FREQUENCY HORIZONTAL</b> 15k~102kHz	<b>FREQUENCY VERTICAL</b> 23~120Hz

<b>COMPATIBILITY</b>	
<b>PC RESOLUTION (MAX)</b> 1920 x 1200	<b>MAC® RESOLUTION (MAX)</b> 1920 x 1200

CONNECTOR	
<b>USB 2.0 TYPE A</b> 1	<b>ETHERNET LAN (RJ45)</b> 1
<b>3.5MM AUDIO OUT</b> 1	<b>3.5MM AUDIO IN</b> 1
<b>CONTROL (RS232)</b> 1	<b>HDMI</b> 2
<b>VGA IN</b> 1	<b>VGA OUT</b> 1
<b>COMPOSITE RCA VIDEO IN</b> 1	<b>S-VIDEO IN</b> 1
<b>MINI USB</b> 1	

AUDIO	
<b>INTERNAL SPEAKERS</b> 10W (x1)	

POWER	
<b>VOLTAGE</b> 100-240V+/- 10%, 50/60Hz AC	<b>CONSUMPTION (TYPICAL)</b> 350W
<b>STAND-BY</b> <0.5W	

CONTROLS	
<b>PHYSICAL CONTROLS</b> Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	<b>ON SCREEN DISPLAY</b> Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

OPERATING CONDITIONS	
<b>TEMPERATURE</b> 32-104° F (0 - 40° C)	<b>HUMIDITY (NON-CONDENSING)</b> 0-90%

<b>ADDITIONAL HARDWARE</b>	
----------------------------	--

<b>KENSINGTON LOCK SLOT</b>
-----------------------------

1
---

<b>WEIGHT (IMPERIAL)</b>	
--------------------------	--

<b>NET (LBS)</b>	<b>GROSS (LBS)</b>
------------------	--------------------

8.1	11.0
-----	------

<b>WEIGHT (METRIC)</b>	
------------------------	--

<b>NET (KG)</b>	<b>GROSS (KG)</b>
-----------------	-------------------

3.7	5.0
-----	-----

<b>DIMENSIONS (IMPERIAL) (WXHxD)</b>	
--------------------------------------	--

<b>PACKAGING (IN.)</b>	<b>PHYSICAL (IN.)</b>
------------------------	-----------------------

16.4 x 8.2 x 13.2	13.1 x 5.3 x 10.3
-------------------	-------------------

<b>DIMENSIONS (METRIC) (WXHxD)</b>	
------------------------------------	--

<b>PACKAGING (MM)</b>	<b>PHYSICAL (MM)</b>
-----------------------	----------------------

417.0 x 207.0 x 336.0	332.0 x 135.0 x 261.0
-----------------------	-----------------------

<b>GENERAL</b>	
----------------	--

<b>AV CONTROL</b>	<b>REGULATIONS</b>
-------------------	--------------------

AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	FCC, cTUVus
----------------------------------------------------------------------------------------	-------------

<b>PACKAGE CONTENTS</b>	<b>WARRANTY</b>
-------------------------	-----------------


PG705HD projector, power cable, VGA cable, remote control, Quick Start Guide	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>RECYCLE/DISPOSAL</b>
-------------------------

Please dispose of in accordance with local, state or federal laws.
--------------------------------------------------------------------

**DIMENSIONS**

13.1 x 10.3 x 5.3 in / 332 x 261 x 135 mm

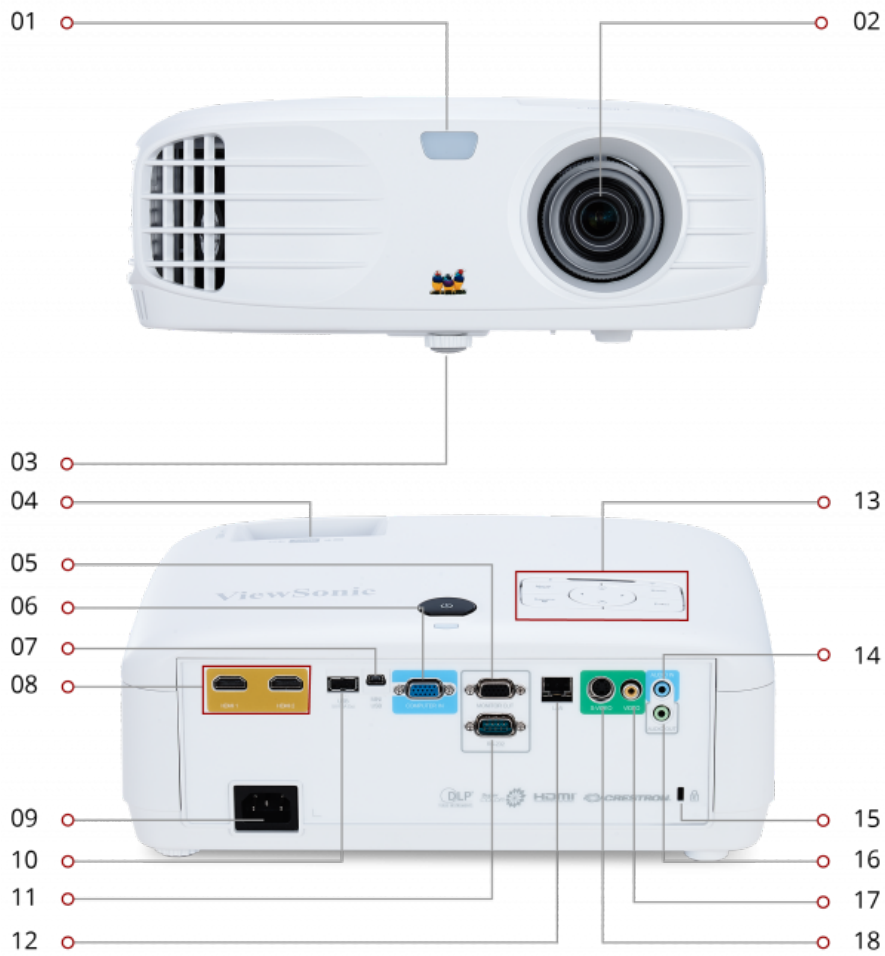

IR remote sensor   Projection lens   Elevation foot   Focus / zoom rings   Monitor Out   VGA   USB type Mini B  
HDMI (x2)   AC In   USB 2.0 Type A (powered)   RS232   LAN   Control Panel   Audio In   Kensington® Lock Slot  
Audio Out   Video In   S-Video In