

RESOLUTION 1920 x 1200	THROW RATIO 1.49-1.76
THROW DISTANCE 3.1 - 37.3 ft / 1 - 11.4 m	BRIGHTNESS (LUMENS) 4,000 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WUXGA (1920x1200)
RESOLUTION 1920 x 1200	BRIGHTNESS (LUMENS) 4,000 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 3.1 - 37.3 ft / 1 - 11.4 m
THROW RATIO 1.49-1.76	KEystone Vertical (+/- 40°)
LENS 1.2x Manual optical zoom / manual optical focus	LIGHT SOURCE (WATT) 240
LIGHT SOURCE LIFE, NORMAL (HOURS) 4000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 12,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15k~102kHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1200	PC RESOLUTION (MIN) 640 x 480
MAC® RESOLUTION (MAX) 1920 x 1200	MAC® RESOLUTION (MIN) 640 x 480

CONNECTOR	
USB 2.0 TYPE A 1	ETHERNET LAN (RJ45) 1
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 1
CONTROL (RS232) 1	HDMI 2
VGA IN 1	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	S-VIDEO IN 1
MINI USB 1	

AUDIO	
INTERNAL SPEAKERS 10W (x1)	

POWER	
VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 350W
STAND-BY <0.5W	

CONTROLS	
PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

OPERATING CONDITIONS	
TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%

ADDITIONAL HARDWARE	
----------------------------	--

KENSINGTON LOCK SLOT

1

WEIGHT (IMPERIAL)	
--------------------------	--

NET (LBS)	GROSS (LBS)
------------------	--------------------

8.1	11.0
-----	------

WEIGHT (METRIC)	
------------------------	--

NET (KG)	GROSS (KG)
-----------------	-------------------

3.7	5.0
-----	-----

DIMENSIONS (IMPERIAL) (WXHxD)	
--------------------------------------	--

PACKAGING (IN.)	PHYSICAL (IN.)
------------------------	-----------------------

16.4 x 8.2 x 13.2	13.1 x 5.3 x 10.3
-------------------	-------------------

DIMENSIONS (METRIC) (WXHxD)	
------------------------------------	--

PACKAGING (MM)	PHYSICAL (MM)
-----------------------	----------------------

417.0 x 207.0 x 336.0	332.0 x 135.0 x 261.0
-----------------------	-----------------------

GENERAL	
----------------	--

AV CONTROL	REGULATIONS
-------------------	--------------------

AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	FCC, cTUVus
--	-------------

PACKAGE CONTENTS	WARRANTY
-------------------------	-----------------


PG705WU projector, power cable, VGA cable, remote control, Quick Start Guide	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
--	--

RECYCLE/DISPOSAL

Please dispose of in accordance with local, state or federal laws.
--

DIMENSIONS

13.1 x 5.3 x 10.3 in / 332.0 x 135.0 x 261.0 mm

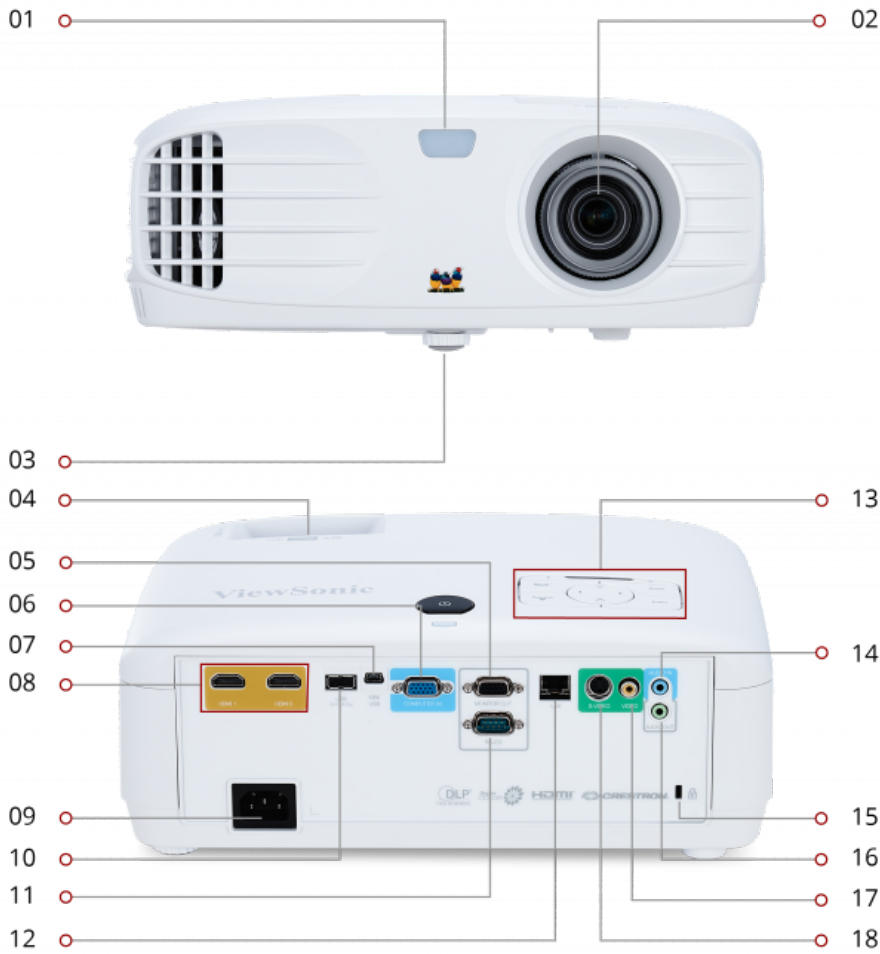

IR remote sensor Projection lens Elevation foot Focus / zoom rings Monitor Out VGA USB type Mini B
HDMI (x2) AC In USB 2.0 Type A (powered) RS232 LAN Control Panel Audio In Kensington® Lock Slot
Audio Out Video In S-Video In