

RESOLUTION 1280 x 800	THROW RATIO 0.23
THROW DISTANCE 1.43 – 1.97 ft / 0.44 – 0.60 m	BRIGHTNESS (LUMENS) 3,300 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WXGA (1280x800)
RESOLUTION 1280 x 800	BRIGHTNESS (LUMENS) 3,300 ANSI
DISPLAY SIZE (IN.) 80 – 115 in. / 2.03 – 2.92 m (with use of included mount)	THROW DISTANCE 1.43 – 1.97 ft / 0.44 – 0.60 m
THROW RATIO 0.23	KEystone Vertical (± 30°) / Horizontal (± 30°)
LENS Manual optical focus	LIGHT SOURCE (WATT) 240
LIGHT SOURCE LIFE, NORMAL (HOURS) 3000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 7500
COLOR DEPTH 30 bits, 1.07B Color (10+10+10)	DYNAMIC CONTRAST RATIO 10,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15-100kHz	FREQUENCY VERTICAL 24-120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920x1080	PC RESOLUTION (MIN) 640 x 480

CONNECTOR	
USB 2.0 TYPE A 1	USB TYPE A (5V 2A) 1
MINI USB TYPE B 2	AUDIO OUTPUT (MINI JACK) 1
ETHERNET LAN (RJ45) 1	3.5MM AUDIO IN 1
CONTROL (RS232) 1	HDMI 1.4 1
HDMI 1.4/MHL 2.0 1	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	S-VIDEO IN 1
RCA AUDIO IN (L/R) 1	RGB INPUT 2

AUDIO	
INTERNAL SPEAKERS 10W (x2)	

POWER	
VOLTAGE AC 100-240V (universal), 50-60Hz	CONSUMPTION (MAX) 410W
STAND-BY <0.5W	

CONTROLS	
PHYSICAL CONTROLS Power, My Button, COMP1., COMP2., HDMI, Auto Sync, Source, 4 direction buttons, Enter, Menu, Laser, Exit, Mouse Left, Mouse Right, Pg Up, Pg Dn, Mouse, Pattern, Blank, Keypad Lock, Volume Mute, HELP, Presentation Timer, Volume, Magnify, Eco Mode, Audio Mode, Color Mode	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

OPERATING CONDITIONS

TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%
---	---

WEIGHT (IMPERIAL)

NET (LBS) 13.38	GROSS (LBS) 18.71
---------------------------	-----------------------------

WEIGHT (METRIC)

NET (KG) 6.08	GROSS (KG) 8.5
-------------------------	--------------------------

DIMENSIONS (IMPERIAL) (WXHxD)

PACKAGING (IN.) 23.23 x 19.69 x 10.83	PHYSICAL (IN.) 17.09 x 15.28 x 6.02
---	---

DIMENSIONS (METRIC) (WXHxD)


PACKAGING (MM) 590 x 500 x 275	PHYSICAL (MM) 434 x 388 x 153
--	---

GENERAL

AV CONTROL AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	REGULATIONS FCC (including ICES003), cTUVus, NOM, TUV-Rheinland S Mark
PACKAGE CONTENTS PS750W Projector, PJ-WMK-303, Laser Curtain Module, 2 IR Pens, Power Cable, VGA Cable, Remote Control with AAA Batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)	WARRANTY Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
RECYCLE/DISPOSAL Please dispose of in accordance with local, state or federal laws.	

DIMENSIONS

17.09 x 15.28 x 6.02 in / 434 x 388 x 153 mm

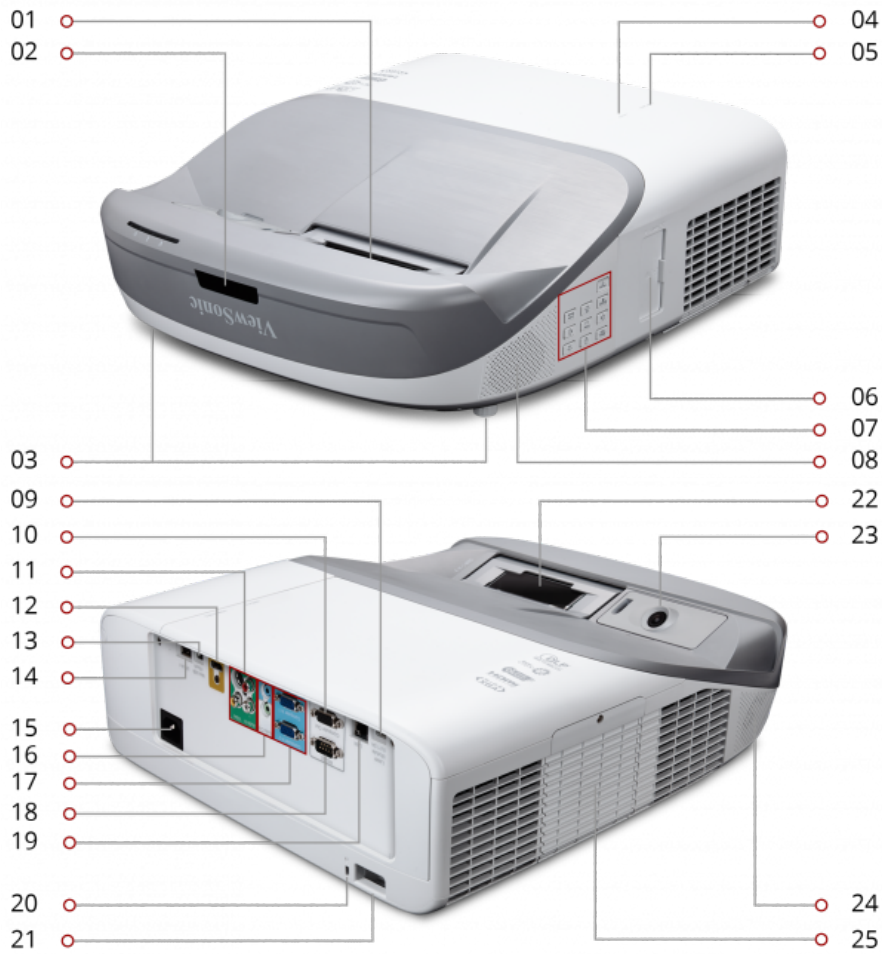

Projection Lens IR Remote Sensor Elevation Feet HDMI/MHL (inside PortAll chamber)

USB mini B (power only, inside PortAll chamber) Focus Lever Menu Controls External Speaker Laser Module control

Monitor Out AV In HDMI Mini USB Type B (for touch) USB Type A (powered) AC In Audio In/Out VGA In (x2)

RS232 LAN Kensington Lock Slot Security Bar Projection Mirror Interactive Camera Module External Speaker

Lamp Access