

<b>RESOLUTION</b> 1920 x 1080	<b>THROW RATIO</b> 0.22
<b>THROW DISTANCE</b> 0.33 - 0.75 ft / 101.6 - 228.6 mm	<b>BRIGHTNESS (LUMENS)</b> 3,300 ANSI

<b>DISPLAY</b>	
<b>TYPE</b> DLP Lamp	<b>RESOLUTION TYPE</b> HD (1920x1080)
<b>RESOLUTION</b> 1920 x 1080	<b>BRIGHTNESS (LUMENS)</b> 3,300 ANSI
<b>DISPLAY SIZE (IN.)</b> 80 – 110 in. / 2.03 – 2.92 m (with use of included mount)	<b>THROW DISTANCE</b> 0.33 - 0.75 ft / 101.6 - 228.6 mm
<b>THROW RATIO</b> 0.22	<b>KEystone</b> Vertical (± 30°) / Horizontal (± 30°)
<b>LENS</b> Manual optical focus	<b>LIGHT SOURCE (WATT)</b> 240
<b>LIGHT SOURCE LIFE, NORMAL (HOURS)</b> 3000	<b>LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS)</b> 7500
<b>COLOR DEPTH</b> 1.07B Color (R/G/B 10bit)	<b>DYNAMIC CONTRAST RATIO</b> 10,000:1
<b>ASPECT RATIO</b> 16:9	

<b>VIDEO SIGNAL</b>	
<b>FREQUENCY HORIZONTAL</b> 15K~102kHz	<b>FREQUENCY VERTICAL</b> 23~120Hz

<b>COMPATIBILITY</b>	
<b>PC RESOLUTION (MAX)</b> 1920 x 1200	<b>PC RESOLUTION (MIN)</b> 640 x 480

CONNECTOR	
<b>USB 2.0 TYPE A</b> 2	<b>ETHERNET LAN (RJ45)</b> 1
<b>3.5MM AUDIO OUT</b> 1	<b>3.5MM AUDIO IN</b> 1
<b>RS232 OUT</b> 1	<b>HDMI</b> 1
<b>HDMI MHL</b> 1	<b>VGA IN</b> 2
<b>VGA OUT</b> 1	<b>COMPOSITE RCA VIDEO IN</b> 1
<b>S-VIDEO IN</b> 1	<b>MINI USB</b> 2
<b>RCA AUDIO IN (L/R)</b> 1	

AUDIO	
<b>INTERNAL SPEAKERS</b> 10W (x2)	

POWER	
<b>VOLTAGE</b> AC 100-240V (universal), 50-60Hz	<b>CONSUMPTION (MAX)</b> 410W
<b>STAND-BY</b> <0.5W	

CONTROLS	
<b>PHYSICAL CONTROLS</b> Power, My Button, COMP1., COMP2., HDMI, Auto Sync, Source, 4 direction buttons, Enter, Menu, Laser, Exit, Mouse Left, Mouse Right, Pg Up, Pg Dn, Mouse, Pattern, Blank, Keypad Lock, Volume Mute, HELP, Presentation Timer, Volume, Magnify, Eco Mode, Audio Mode, Color Mode	<b>ON SCREEN DISPLAY</b> Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

OPERATING CONDITIONS	
----------------------	--

<b>TEMPERATURE</b> 32-104° F (0 - 40° C)	<b>HUMIDITY (NON-CONDENSING)</b> 0-90%
---	---

ADDITIONAL HARDWARE	
---------------------	--

<b>KENSINGTON LOCK SLOT</b> 1	
----------------------------------	--

WEIGHT (IMPERIAL)	
-------------------	--

<b>NET (LBS)</b> 13.4	<b>GROSS (LBS)</b> 18.7
--------------------------	----------------------------

WEIGHT (METRIC)	
-----------------	--

<b>NET (KG)</b> 6.1	<b>GROSS (KG)</b> 8.5
------------------------	--------------------------

DIMENSIONS (IMPERIAL) (WXHxD)	
-------------------------------	--

<b>PACKAGING (IN.)</b> 23.2 x 10.8 x 19.7	<b>PHYSICAL (IN.)</b> 17.1 x 6.0 x 15.3
--	--

DIMENSIONS (METRIC) (WXHxD)	
-----------------------------	--


<b>PACKAGING (MM)</b> 590.0 x 275.0 x 500.0	<b>PHYSICAL (MM)</b> 434.0 x 153.0 x 388.0
--	---

## GENERAL

<b>AV CONTROL</b>	<b>REGULATIONS</b>
AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	FCC, CE EMC, CB, ROHS, WEEE, Mexico NOM, cTUVus
<b>PACKAGE CONTENTS</b>	<b>WARRANTY</b>
PS750HD projector, wall mount, interactive module, interactive software, 2 x interactive pens, power cable, VGA cable, remote control with AAA batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
<b>RECYCLE/DISPOSAL</b>	
Please dispose of in accordance with local, state or federal laws.	

## DIMENSIONS

17.1 x 6.0 x 15.3 in / 434.0 x 153.0 x 388.0 mm

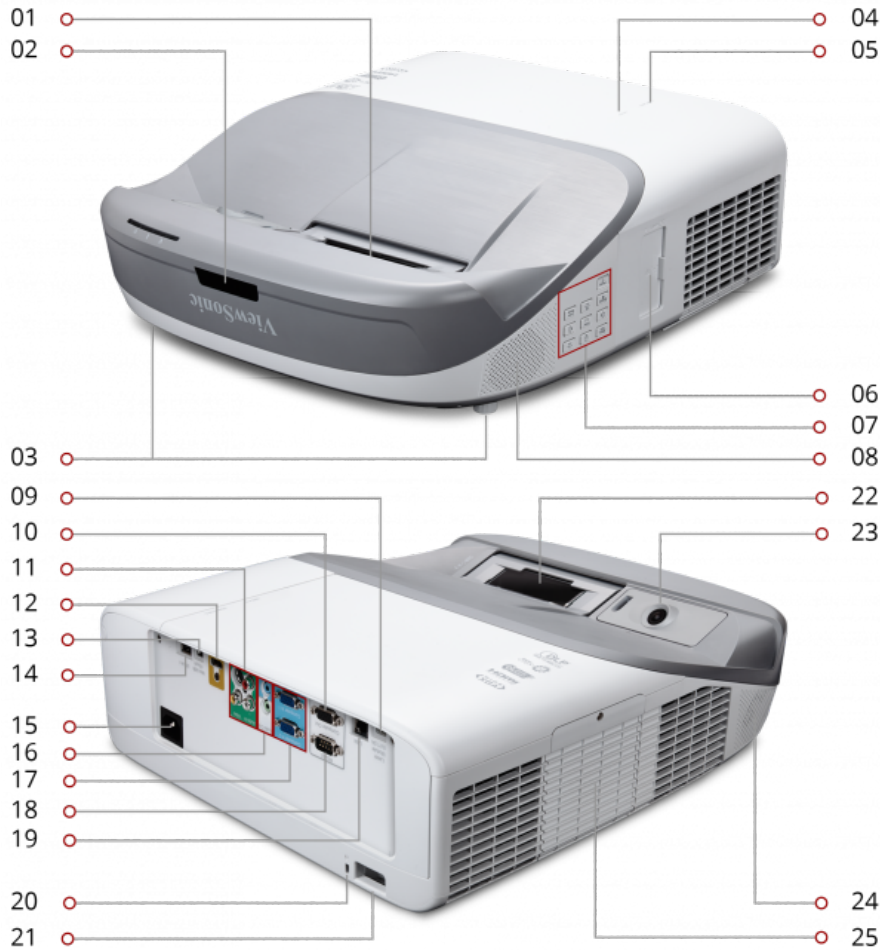

Projection Lens   IR Remote Sensor   Elevation Feet   HDMI/MHL (inside PortAll chamber)

USB mini B (power only, inside PortAll chamber)   Focus Lever   Menu Controls   External Speaker   Laser Module control

Monitor Out   AV In   HDMI   Mini USB Type B (for touch)   USB Type A (powered)   AC In   Audio In/Out   VGA In (x2)

RS232 LAN Kensington Lock Slot Security Bar Projection Mirror Interactive Camera Module External Speaker  
Lamp Access