

RESOLUTION 1280 x 800	THROW RATIO 0.5
THROW DISTANCE 2.1 - 6.2 ft / 0.6 - 1.9 m	BRIGHTNESS (LUMENS) 3,500 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WXGA (1280x800)
RESOLUTION 1280 x 800	BRIGHTNESS (LUMENS) 3,500 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 2.1 - 6.2 ft / 0.6 - 1.9 m
THROW RATIO 0.5	KEYSTONE Vertical (± 40°) / Horizontal (± 26°)
LENS Fixed Zoom	LIGHT SOURCE (WATT) 200
LIGHT SOURCE LIFE, NORMAL (HOURS) 5000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102KHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1080	PC RESOLUTION (MIN) 640 x 480
MAC® RESOLUTION (MAX) 1920 x 1080	MAC® RESOLUTION (MIN) 640 x 480

CONNECTOR	
USB 2.0 TYPE A 1	ETHERNET LAN (RJ45) 1
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 1
CONTROL (RS232) 1	HDMI 1.4 2
VGA IN 2	VGA OUT 1
COMPOSITE RCA VIDEO IN 1	MINI USB 1

AUDIO	
INTERNAL SPEAKERS 10W (x1)	

POWER	
VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 260W
STAND-BY <0.5W	

CONTROLS	
PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

OPERATING CONDITIONS	
TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%

ADDITIONAL HARDWARE**KENSINGTON LOCK SLOT**

1

WEIGHT (IMPERIAL)**NET (LBS)**

5.7

GROSS (LBS)

7.2

WEIGHT (METRIC)**NET (KG)**

2.6

GROSS (KG)

3.3

DIMENSIONS (IMPERIAL) (WXHXD)**PACKAGING (IN.)**

14.4 x 7.4 x 11.8

PHYSICAL (IN.)

11.5 x 4.5 x 9.3

DIMENSIONS (METRIC) (WXHXD)**PACKAGING (MM)**

365.0 188.0 x 300.0

PHYSICAL (MM)


292.0 x 115.0 x 236.0

GENERAL**AV CONTROL**AMX Certified, ATEN Certified, Crestron Certified, PJ
Link Certified**REGULATIONS**

FCC, cTUVus, ROHS

PACKAGE CONTENTSPS600W projector, power cable, VGA cable, remote control,
Quick Start Guide**WARRANTY**Three-year limited warranty on parts and labor, 1-year
limited warranty on lamp, 1st year free Express Exchange®
service. (One year Express Exchange Service requires
product registration).**RECYCLE/DISPOSAL**Please dispose of in accordance with local, state or federal
laws.**DIMENSIONS**

11.5 x 4.5 x 9.3 in / 292.0 x 115.0 x 236.0 mm

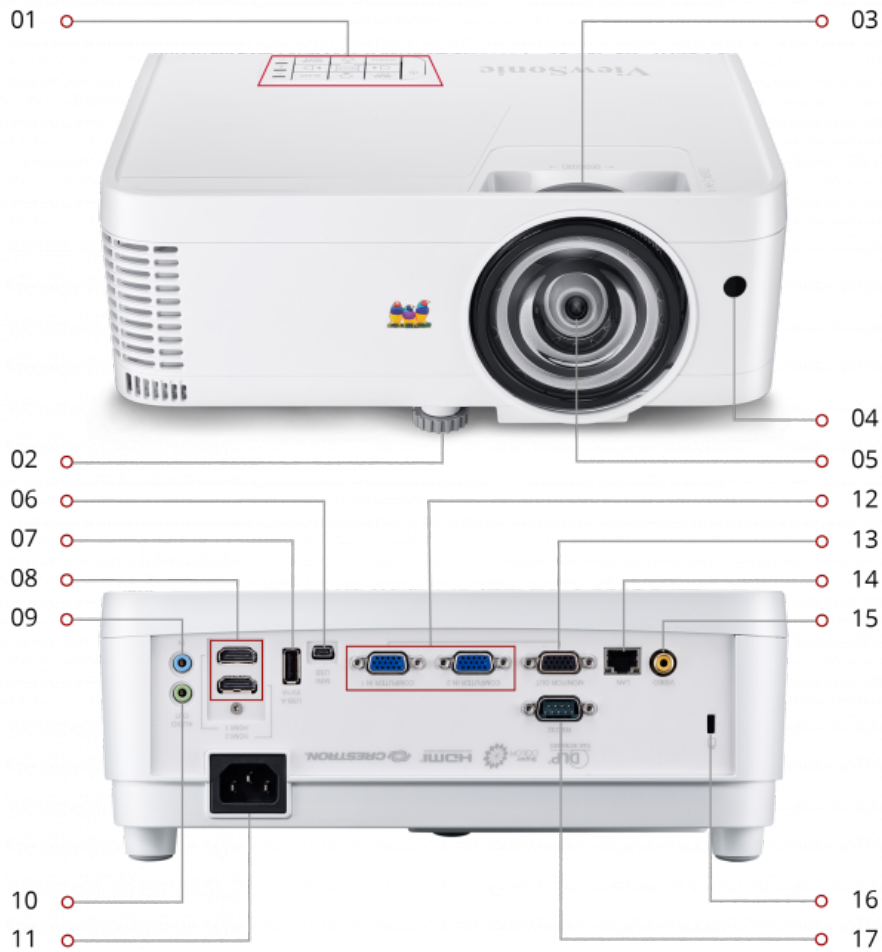

Menu Controls Elevation Feet Zoom Ring IR Remote Sensor Projection Lens USB Mini USB 2.0 Type A
HDMI (x2) Audio In Audio Out AC In VGA In (x2) Monitor Out LAN Video Kensington® Lock Slot RS232