

RESOLUTION 1280 x 800	THROW RATIO 0.49
THROW DISTANCE 2.1 - 6.2 ft / 0.6 - 1.9 m	BRIGHTNESS (LUMENS) 3,500 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WXGA (1280x800)
RESOLUTION 1280 x 800	BRIGHTNESS (LUMENS) 3,500 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 2.1 - 6.2 ft / 0.6 - 1.9 m
THROW RATIO 0.49	KEystone Vertical (+/- 40°)
LENS Fixed Zoom	LIGHT SOURCE (WATT) 200
LIGHT SOURCE LIFE, NORMAL (HOURS) 5000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102KHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1080	PC RESOLUTION (MIN) 640 x 480
MAC® RESOLUTION (MAX) 1920 x 1080	MAC® RESOLUTION (MIN) 640 x 480

CONNECTOR

USB 2.0 TYPE A 1	3.5MM AUDIO OUT 1
3.5MM AUDIO IN 1	CONTROL (RS232) 1
HDMI 1.4 1	VGA IN 2
VGA OUT 1	COMPOSITE RCA VIDEO IN 1
MINI USB 1	

AUDIO

INTERNAL SPEAKERS 2W (x1)	
-------------------------------------	--

POWER

VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 260W
STAND-BY <0.5W	

CONTROLS

PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
---	--

OPERATING CONDITIONS

TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%
---	---

ADDITIONAL HARDWARE**KENSINGTON LOCK SLOT**

1

WEIGHT (IMPERIAL)**NET (LBS)**

5.7

GROSS (LBS)

7.2

WEIGHT (METRIC)**NET (KG)**

2.6

GROSS (KG)

3.3

DIMENSIONS (IMPERIAL) (WXHxD)**PACKAGING (IN.)**

14.4 x 7.4 x 11.8

PHYSICAL (IN.)

11.5 x 4.5 x 9.3

DIMENSIONS (METRIC) (WXHxD)**PACKAGING (MM)**

365.0 x 188.0 x 300.0

PHYSICAL (MM)

292.0 x 115.0 x 236.0

GENERAL**REGULATIONS**

FCC, cTUVus, ROHS

PACKAGE CONTENTSPS501W projector, power cable, VGA cable, remote control,
Quick Start Guide**WARRANTY**


Three-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

RECYCLE/DISPOSAL

Please dispose of in accordance with local, state or federal laws.

DIMENSIONS

11.5 x 4.5 x 9.3 in / 292.0 x 115.0 x 236.0 mm

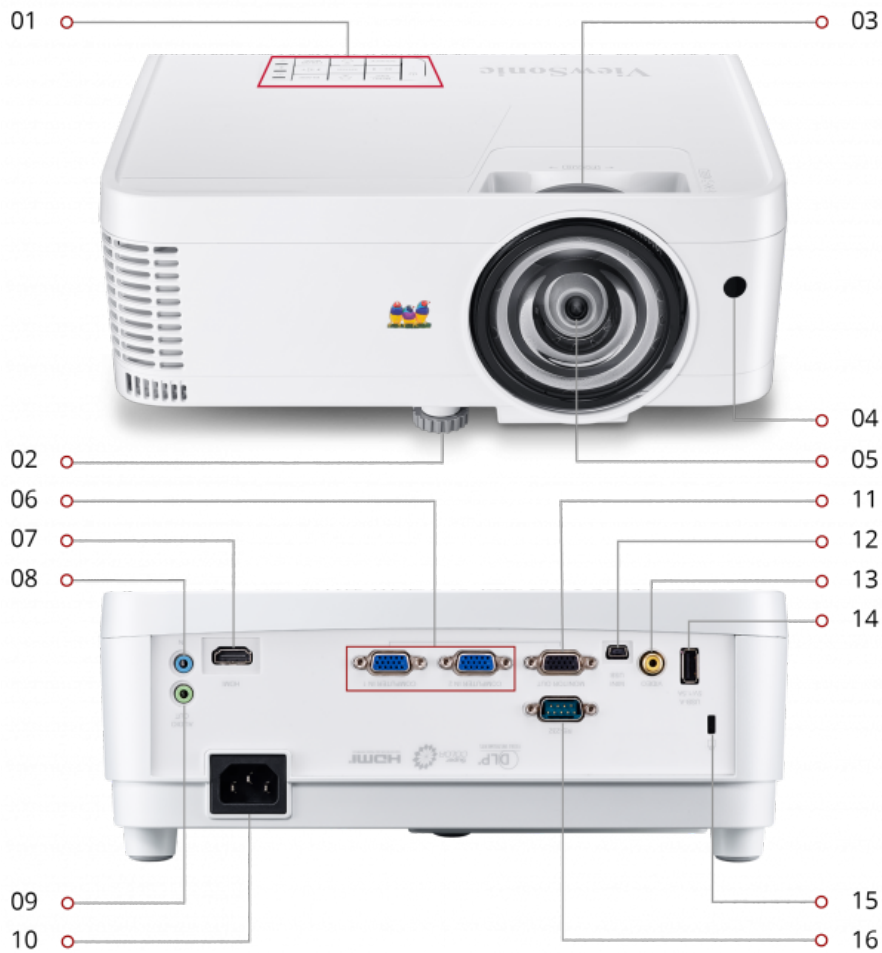

01 Menu Controls 02 Elevation Feet 03 Zoom Ring 04 IR Remote Sensor 05 Projection Lens 06 VGA In (x2) 07 HDMI 08 Audio In
 09 Audio Out 10 AC In 11 Monitor Out 12 USB Mini 13 Video 14 USB 2.0 Type A 15 Kensington® Lock Slot 16 RS232