

RESOLUTION 1280 x 800	THROW RATIO 1.55-1.70
THROW DISTANCE 3.3 - 36 ft / 1 - 11 m	BRIGHTNESS (LUMENS) 3,600 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE WXGA (1280x800)
RESOLUTION 1280 x 800	BRIGHTNESS (LUMENS) 3,600 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 3.3 - 36 ft / 1 - 11 m
THROW RATIO 1.55-1.70	KEystone Vertical ($\pm 30^\circ$) / Horizontal ($\pm 20^\circ$)
LENS 1.1x optical zoom	LIGHT SOURCE (WATT) 200
LIGHT SOURCE LIFE, NORMAL (HOURS) 5000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 16:10	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102kHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1080	PC RESOLUTION (MIN) 640 x 480
MAC® RESOLUTION (MAX) 1920 x 1080	MAC® RESOLUTION (MIN) 640 x 480

CONNECTOR

USB 2.0 TYPE A 2	USB READER 1
ETHERNET LAN (RJ45) 1	3.5MM AUDIO OUT 1
3.5MM AUDIO IN 1	CONTROL (RS-232) 1
HDMI 1	VGA IN 1
VGA OUT 1	COMPOSITE RCA VIDEO IN 1
MINI USB 1	WIFI PJ-WPD-200 (Optional)

AUDIO

INTERNAL SPEAKERS 10W (x1)

POWER

VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 270W
STAND-BY <0.5W	

CONTROLS

PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
-------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------

OPERATING CONDITIONS

TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%
---------------------------------------------	-------------------------------------------

ADDITIONAL HARDWARE	
----------------------------	--

KENSINGTON LOCK SLOT

1

WEIGHT (IMPERIAL)	
--------------------------	--

NET (LBS)	GROSS (LBS)
------------------	--------------------

5.1	7.3
-----	-----

WEIGHT (METRIC)	
------------------------	--

NET (KG)	GROSS (KG)
-----------------	-------------------

2.3	3.3
-----	-----

DIMENSIONS (IMPERIAL) (WXHxD)	
--------------------------------------	--

PACKAGING (IN.)	PHYSICAL (IN.)
------------------------	-----------------------

14.4 x 11.8 x 7.4	11.6 x 8.6 x 4.3
-------------------	------------------

DIMENSIONS (METRIC) (WXHxD)	
------------------------------------	--

PACKAGING (MM)	PHYSICAL (MM)
-----------------------	----------------------

365.0 x 300.0 x 188.0	294.0 x 218.0 x 110.0
-----------------------	-----------------------

GENERAL	
----------------	--

AV CONTROL	REGULATIONS
-------------------	--------------------

AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	FCC, cTUVus, NOM
----------------------------------------------------------------------------------------	------------------

PACKAGE CONTENTS	WARRANTY
-------------------------	-----------------


PG603W projector, power cable, VGA cable, remote control, Quick Start Guide	Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
-----------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

RECYCLE/DISPOSAL

Please dispose of in accordance with local, state or federal laws.

DIMENSIONS

11.6 x 8.6 x 4.3 in / 294 x 218 x 110 mm

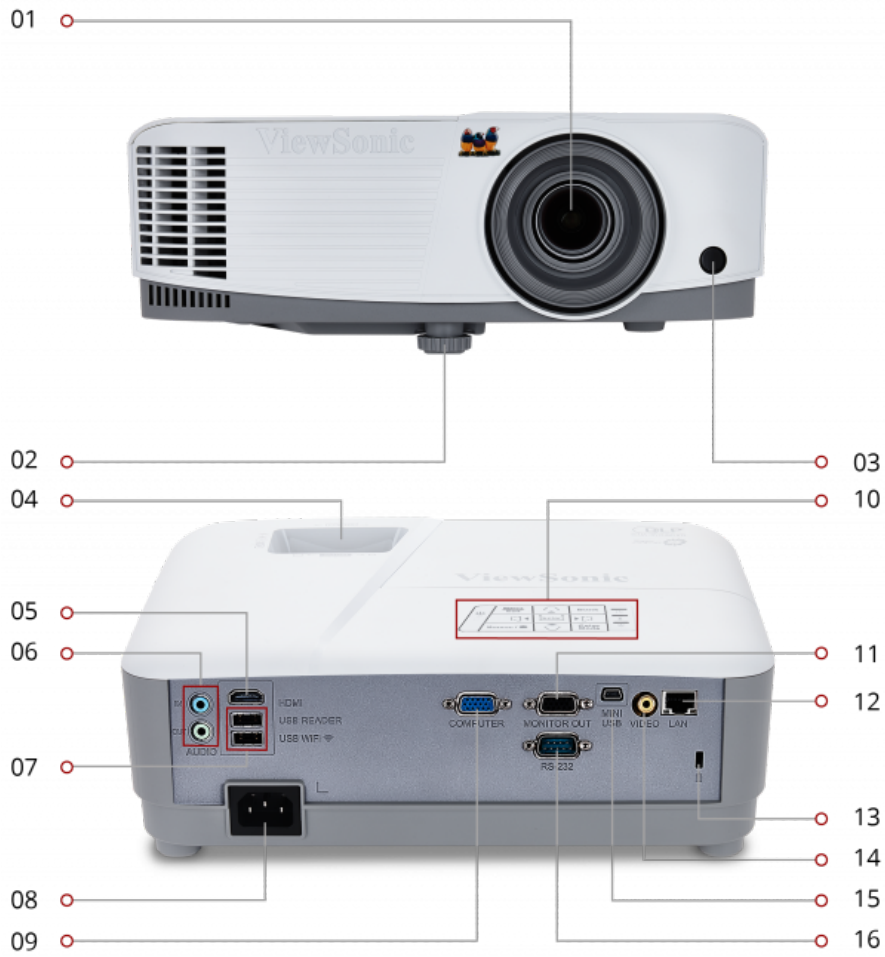

Projection lens Elevation foot IR remote sensor Focus / zoom rings HDMI Audio In/Out USB (1x Reader / 1x WiFi)
AC In VGA Control Panel Monitor Out LAN Kensington® Lock Slot Video In USB type Mini B RS232