

RESOLUTION 1024 x 768	THROW RATIO 1.96 ~ 2.15
THROW DISTANCE 3.9 - 43 ft / 1.19 - 13.11 m	BRIGHTNESS (LUMENS) 3,600 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE XGA (1024x768)
RESOLUTION 1024 x 768	BRIGHTNESS (LUMENS) 3,600 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 3.9 - 43 ft / 1.19 - 13.11 m
THROW RATIO 1.96 ~ 2.15	KEystone Vertical (+/- 40°)
LENS 1.1x optical zoom	LIGHT SOURCE (WATT) 190
LIGHT SOURCE LIFE, NORMAL (HOURS) 5000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 4:3	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102KHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) VGA (640 x 480) to WUXGA_RB (1920 x 1200)	MAC® RESOLUTION (MAX) VGA (640 x 480) to WUXGA_RB (1920 x 1200)

CONNECTOR	
MINI USB TYPE B 1	AUDIO OUTPUT (MINI JACK) 1
3.5MM AUDIO IN 1	CONTROL (RS232) 1
HDMI 1.4 1	VGA IN 2
VGA OUT 1	COMPOSITE RCA VIDEO IN 1

AUDIO	
INTERNAL SPEAKERS 2W (x1)	

POWER	
VOLTAGE AC 100-240V (universal), 50-60Hz	CONSUMPTION (TYPICAL) 260W
STAND-BY <0.5W	

OPERATING CONDITIONS	
TEMPERATURE 32-104° F (0 - 40° C)	

WEIGHT (IMPERIAL)	
NET (LBS) 4.9	GROSS (LBS) 7.1

WEIGHT (METRIC)	
NET (KG) 2.2	GROSS (KG) 6.2

DIMENSIONS (IMPERIAL) (WXHxD)	
PACKAGING (IN.) 14.4 x 11.8 x 7.4	PHYSICAL (IN.) 11.6 x 4.3 x 8.6


DIMENSIONS (METRIC) (WXHxD)	
PACKAGING (MM) 365 x 188 x 300	PHYSICAL (MM) 294 x 110 x 218

GENERAL	
REGULATIONS FCC (including ICES-003), cTUVus	PACKAGE CONTENTS PA503X projector, power cable, VGA cable, remote control, Quick Start Guide
WARRANTY 3-year limited warranty on parts and labor, 1st year free Express Exchange® service**	RECYCLE/DISPOSAL Please dispose of in accordance with local, state or federal laws.

DIMENSIONS

11.57 x 8.58 x 4.33 in / 294 x 218 x 110 mm



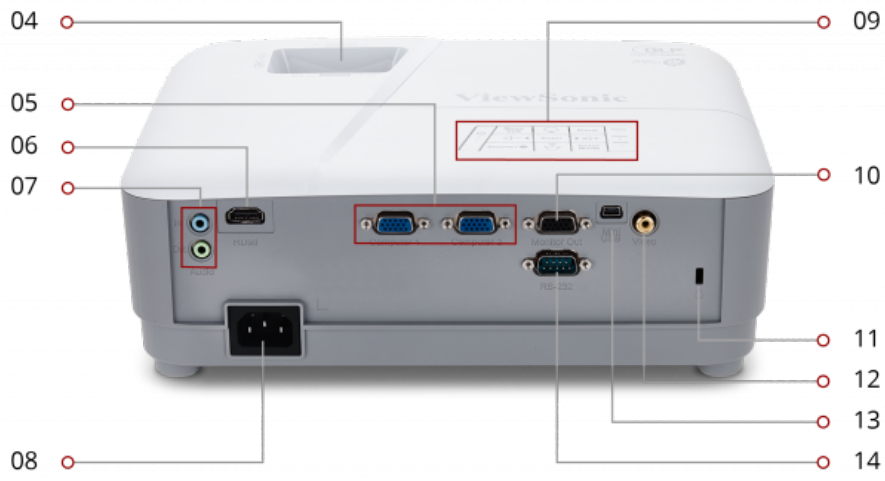

Projection lens IR remote sensor Elevation foot Focus / zoom rings VGA x2 HDMI Audio In/Out AC In
 Control Panel Monitor Out Kensington® Lock Slot Video In USB type Mini B RS232