

RESOLUTION 1024 x 768	THROW RATIO 1.96-2.15
THROW DISTANCE 3.3 - 36 ft / 1 - 11 m	BRIGHTNESS (LUMENS) 3,600 ANSI

DISPLAY	
TYPE DLP Lamp	RESOLUTION TYPE XGA (1024x768)
RESOLUTION 1024 x 768	BRIGHTNESS (LUMENS) 3,600 ANSI
DISPLAY SIZE (IN.) 30 - 300 in. / 0.76 - 7.62 m	THROW DISTANCE 3.3 - 36 ft / 1 - 11 m
THROW RATIO 1.96-2.15	KEystone Vertical ($\pm 30^\circ$) / Horizontal ($\pm 20^\circ$)
LENS 1.1x optical zoom	LIGHT SOURCE (WATT) 190
LIGHT SOURCE LIFE, NORMAL (HOURS) 5000	LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS) 15000
COLOR DEPTH 1.07B Color (R/G/B 10bit)	DYNAMIC CONTRAST RATIO 22,000:1
ASPECT RATIO 4:3	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 15K~102kHz	FREQUENCY VERTICAL 23~120Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 1920 x 1080	PC RESOLUTION (MIN) 640 x 480
MAC® RESOLUTION (MAX) 1920 x 1080	MAC® RESOLUTION (MIN) 640 x 480

CONNECTOR

USB 2.0 TYPE A 2	USB READER 1
ETHERNET LAN (RJ45) 1	3.5MM AUDIO OUT 1
3.5MM AUDIO IN 1	CONTROL (RS-232) 1
HDMI 1	VGA IN 1
VGA OUT 1	COMPOSITE RCA VIDEO IN 1
MINI USB 1	WIFI PJ-WPD-200 (Optional)

AUDIO

INTERNAL SPEAKERS 10W (x1)

POWER

VOLTAGE 100-240V+/- 10%, 50/60Hz AC	CONSUMPTION (TYPICAL) 270W
STAND-BY <0.5W	

CONTROLS

PHYSICAL CONTROLS Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source	ON SCREEN DISPLAY Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
---	--

OPERATING CONDITIONS

TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%
---	---

ADDITIONAL HARDWARE**KENSINGTON LOCK SLOT**

1

WEIGHT (IMPERIAL)**NET (LBS)**

5.1

GROSS (LBS)

7.3

WEIGHT (METRIC)**NET (KG)**

2.3

GROSS (KG)

3.3

DIMENSIONS (IMPERIAL) (WXHXD)**PACKAGING (IN.)**

14.4 x 11.8 x 7.4

PHYSICAL (IN.)

11.6 x 8.6 x 4.3

DIMENSIONS (METRIC) (WXHXD)**PACKAGING (MM)**

365.0 x 300.0 x 188.0

PHYSICAL (MM)

294.0 x 218.0 x 110.0

GENERAL**AV CONTROL**

AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified

REGULATIONS

FCC, cTUVus, NOM

PACKAGE CONTENTS

PG603X projector, power cable, VGA cable, remote control, Quick Start Guide

WARRANTY


Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

RECYCLE/DISPOSAL

Please dispose of in accordance with local, state or federal laws.

DIMENSIONS

11.6 x 8.6 x 4.3 in / 294 x 218 x 110 mm

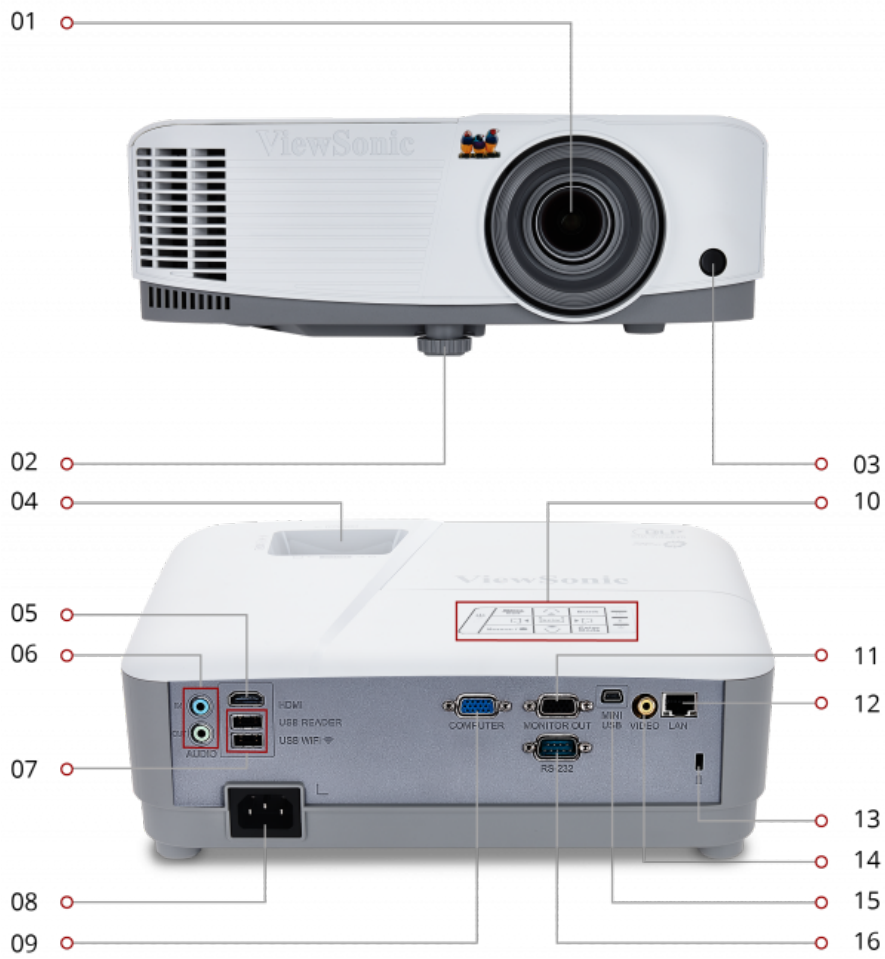

Projection lens Elevation foot IR remote sensor Focus / zoom rings HDMI Audio In/Out USB (1x Reader / 1x WiFi)
AC In VGA Control Panel Monitor Out LAN Kensington® Lock Slot Video In USB type Mini B RS232