



5SC2200IRT

Eaton 5SC 2200 VA Rack/Tower

General

Topology	Line-interactive high frequency with booster + fader, pure sinewave output
Configuration	Rack/Tower
Part Number	5SC2200IRT
Color	Black
Rating (VA/Watts)	2200/1980
Dimensions (H x W x D, mm)	86.2 x 441 x 522
Weight (kg)	26.5
Warranty	2 years

Electrical Input

Connection	(1) IEC-320-C20
------------	-----------------



Input Voltage Range	184V-276V
Nominal Voltage	230V
Input frequency Range Without Using Batteries	45–55Hz (50Hz system), 55–65Hz (60Hz system)

Electrical Output


Voltages	230V (+6/–10 %) (Adjustable to 220V/230V/240V)
----------	--

Outlets	(8) IEC-320-C13 (1) IEC-320-C19
---------	--------------------------------------



Output Frequency	50/60Hz +/-0.1 % (autosensing)
------------------	--------------------------------

Battery

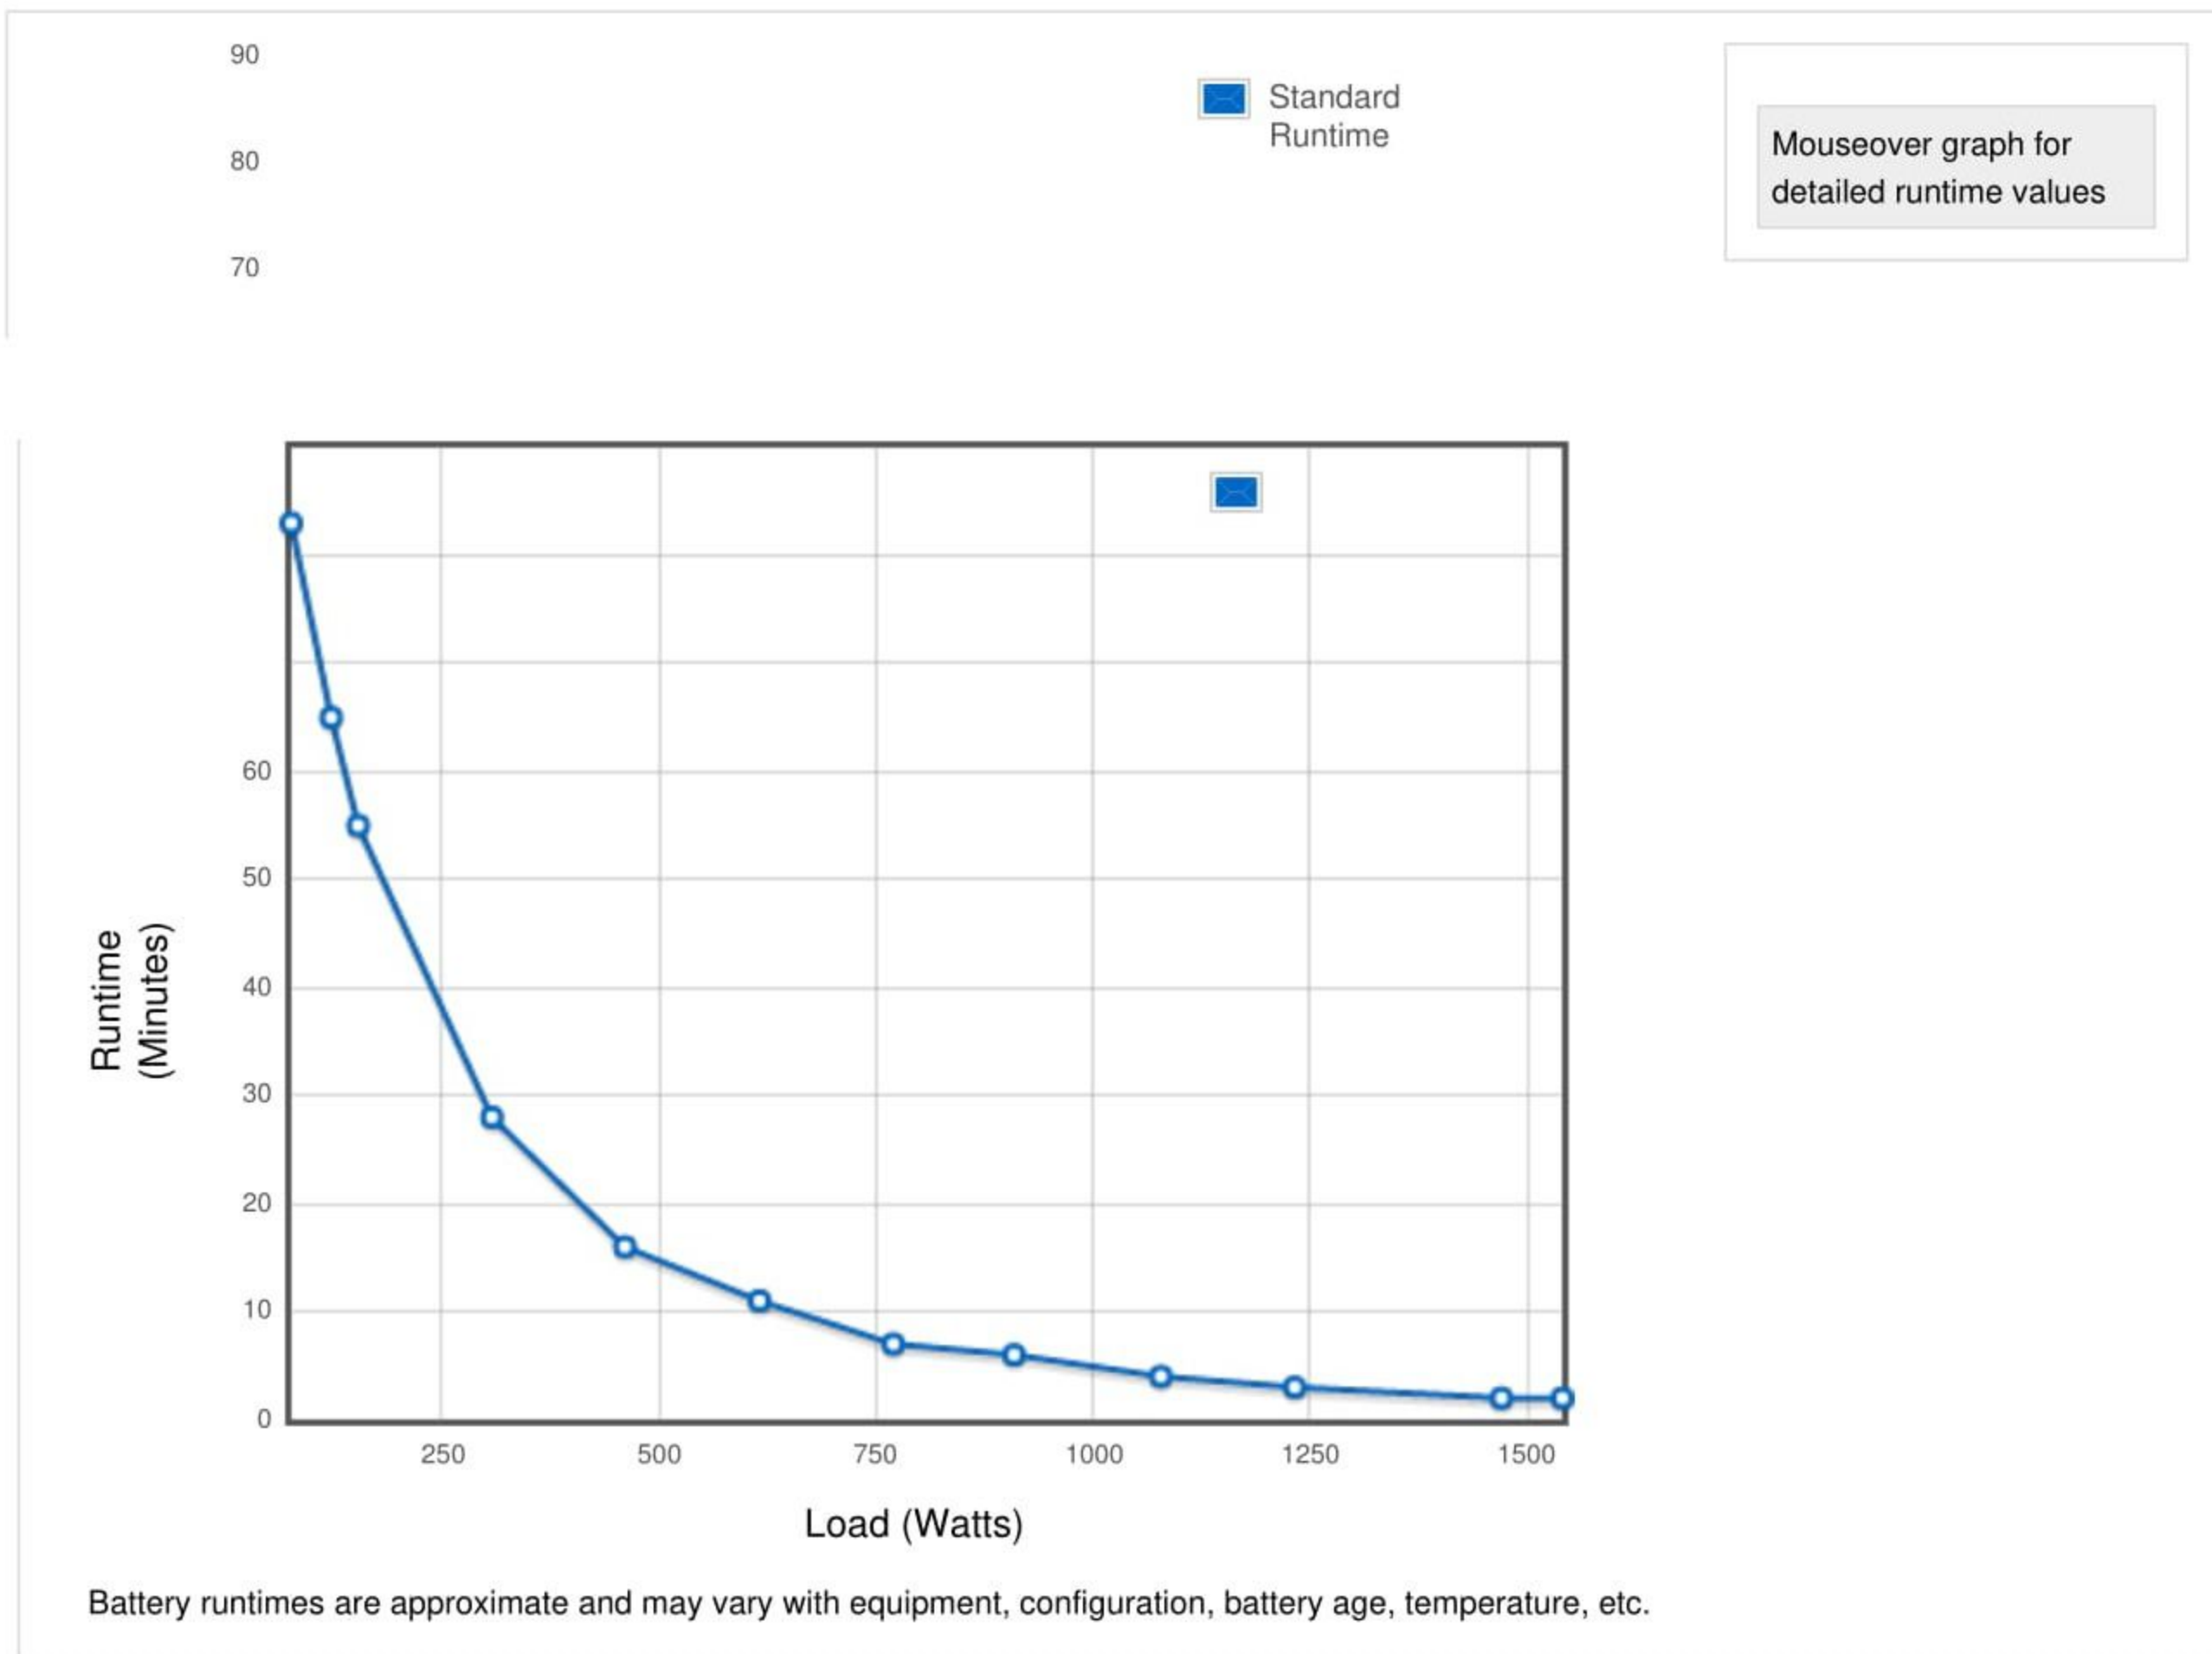

Battery Management

ABM®, Automatic battery test, deep discharge protection

Communications

Communication Ports	1 USB port + 1 RS232 serial port and relay contacts (USB and RS232 ports cannot be used simultaneously) + 1 mini terminal block for remote ON/OFF and Remote Power Off
Communication Slot	1 slot for Network management card or Relay card

Environmental & Standards

Audible Noise	<45 dB
Operating Temperature	0 to 40°C
Safety markings	IEC/EN 62040-1, UL 1778
EMC Markings	IEC/EN 62040-2
Approvals	CE, CB report (TUV)