

Overview

Cisco Catalyst 3850-48P-L switch is the next generation stackable enterprise level switch and integrated with 48 Ethernet POE + ports with upgradeable LAN base IOS image.


Quick Specs

Table 1 shows the Quick Specs.

Product Code	WS-C3850-48P-L
Enclosure Type	1 RU
Feature Set	LAN Base
Available PoE Power	435W
Network SFP uplink module selection	C3850-NM-4-1G C3850-NM-2-10G C3850-NM-4-10G
Ports	48 x 10/100/1000 (POE+)
Maximum stacking number	9
Stack bandwidth	480 Gbps
Forwarding Performance	130.95 Mpps
Switching Capacity	176 Gbps
RAM	4 G
Flash Memory	2 G
Number of AP per switch/stack	100
Number of wireless clients per switch/stack	2000
Dimensions	44.5 cm x 44.5 cm x 4.45 cm
Package Weight	17.49 Kg

Product Details

Figure 1 shows the front panel of the WS-C3850-48P-L.

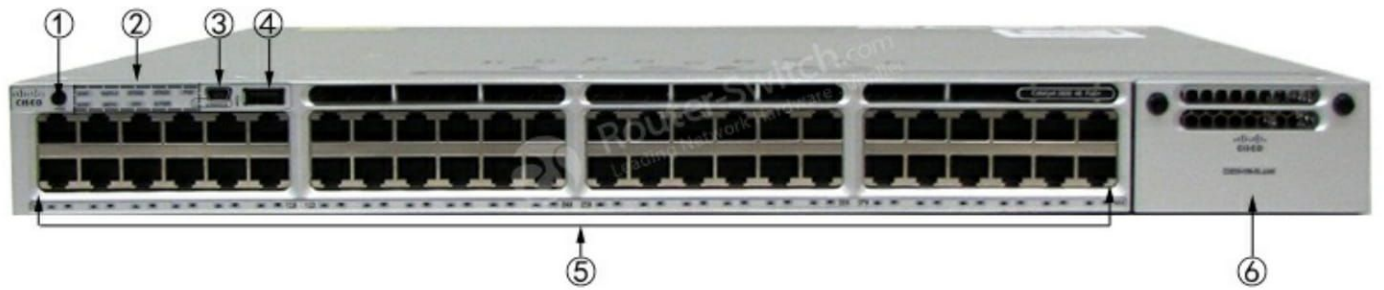


Note

(1)	Mode button	(4)	USB Type A storage port
(2)	Status LEDs	(5)	48 * 10/100/1000 Ethernet ports
(3)	USB mini-Type B (console) port	(6)	Network SFP uplink module slot

The status LEDs include STAT (status), DUPLX (duplex), SPEED, STACK, SYST (system), PoE, ACTV (active) and S-PWR (Stack Power).

The switch supports one hot-swappable network module that provides uplink ports to connect to other devices. The switch should only be operated with either a network module or a blank module installed.

Figure 2 shows the back panel of the WS-C3850-48P-L.

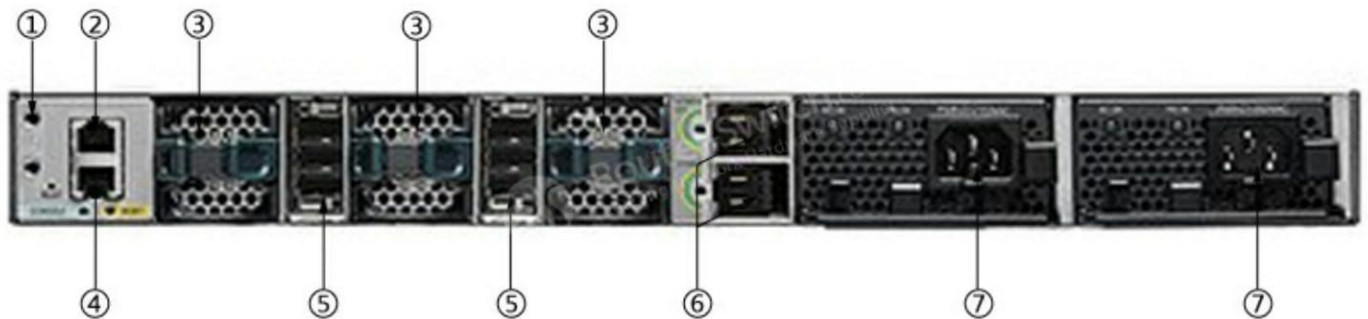

Note

(1)	Ground connector	(5)	StackWise port connectors
(2)	CONSOLE (RJ-45 console port)	(6)	StackPower connectors
(3)	Fan modules	(7)	Power supply modules
(4)	MGMT port		

Figure 3 shows the StackWise-480 and StackPower connectors.

LAN base switches can only stack with other Catalyst 3850 Series LAN base, mix stack with IP base or IP service feature set is not supported.



The Modules, Licenses and Accessories

Table 2 shows some recommended modules, licenses and accessories of this switch.

Models	Description
C3850-NM-4-1G	Cisco 3850 Series 4 x 1GE Network Module
C3850-NM-2-10G	Cisco 3850 Series 2 x 10GE Network Module
C3850-NM-4-10G	Cisco 3850 Series 4 x 10GE Network Module
L-C3850-48-L-S=	C3850-48 LAN Base to IP Base Electronic RTU License
L-C3850-48-L-E=	C3850-48 LAN Base to IP Services Electronic RTU License
PWR-C1-715WAC	Cisco 3850 Series Power Supply 715W AC
PWR-C1-715WAC/2	Cisco 3850 Series Secondary Power Supply 715W AC Config 1 Secondary Power Supply
CAB-SPWR-30CM	Catalyst 3750X and 3850 Stack Power Cable 30 CM
CAB-SPWR-150CM	Catalyst 3750X and 3850 Stack Power Cable 150 CM
STACK-T1-50CM=	Cisco StackWise-480 50cm stacking cable for Cisco Catalyst 3850 series switch
STACK-T1-1M=	Cisco StackWise-480 1m stacking cable for Cisco Catalyst 3850 series switch

Compare to Similar Items

Table 3 shows the comparison between **WS-C3850-48P-L** and **WS-C3850-48T-S**.

Models	WS-C3850-48P-L	WS-C3850-48T-S
Feature Set	LAN Base	IP Base
Network SFP uplink module selection	C3850-NM-4-1G C3850-NM-2-10G C3850-NM-4-10G	C3850-NM-4-1G C3850-NM-2-10G C3850-NM-4-10G
Ports	48 * 10/100/1000 Ethernet ports	48 * 10/100/1000 Ethernet ports
Available PoE Power	435W	N/A

Switch to Something New

[Why Upgrade to Catalyst 9300?](#) | [See the Catalyst 9300 Series](#)

Get more information

Do you have any question about the WS-C3850-48P-L?

Specification

WS-C3850-48P-L Specification	
model info:	WS-C3850-48P-L
enclosure type	Rack-mountable - 1U
Ports	48 x 10/100/1000 (POE+)
Network management Interface	● Ethernet management port: RJ-45 connectors, 4-pair Cat-5 UTP cabling ● Management console port: RJ-45-to-DB9 cable for PC connections
Available PoE Power	435W
Switching Capacity	176Gbps
Maximum stacking number	up to 9 switches with same IOS feature set in same series
Stack Bandwidth	480Gbps
Forwarding Performance	130.95Mpps
FNF (Flexible NetFlow) entries	Disabled (IP base license required)
Maximum VLANs IDs	255
MAC Address Table Size	32K
CPU	Multicore CPU
RAM	4 G
Flash Memory	2 G
Wireless	
Number of AP per switch/stack	100
Number of wireless clients per switch/stack	2000
Total number of WLANs per switch	64
Wireless bandwidth per switch	up to 40Gbps
Supported Aironet AP series	3600, 3500, 2600, 1600, 1260, 1140, 1040
Expansion / Connectivity	
Console ports	USB (Type-B), Ethernet (RJ-45)
Expansion Slot(s)	1 network module slot and 1 power redundant slot
Network Modules Selection	● C3850-NM-4-1G: 4 x 1G uplinks network module ● C3850-NM-4-10G: 4 x 10G uplinks network module ● C3850-NM-2-10G: 2 x 10G or 4 x 1G uplinks network module
Stacking cable	● STACK-T1-50CM StackWise stacking cable with a 0.5 m length ● STACK-T1-1M StackWise stacking cable with a 1.0 m length ● STACK-T1-3M StackWise stacking cable with a 3.0 m length