


CS1742/CS1744

2/4-Port USB Dual-View KVM™ Switch


- CS1742/CS1744 2/4-Port KVM Switch integrates functions of video signal dual output and USB KVMswitches. It allows a computer with dual-screen support to pair with twoVGA/SVGA/Multisyncdisplays via a USB keyboard and mouse. Furthermore, CS1742/CS1744 provides 2 USB ports, allowingeach server to share any USB peripheral device that is connected to this HUB.

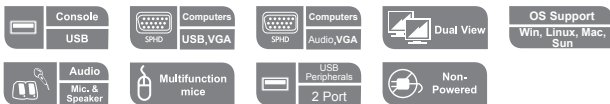

Features

- Allows one USB keyboard, USB mouse, speakers, microphone and two displays to control twodual display computers
- 2 port USB Hub built in
- Multipatform support: compatible with all operation platforms PC (Windows, Linux and mostothers), Mac and Sun
- With speaker and microphone support
- Bi-directional switching and flexible interoperability; switch permits independent PC,independent peripheral, and independent audio function, regardless of KVM switch focus
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality - up to 2048 x 1536; DDC2B
- Firmware upgradeable
- OS Support:Windows LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation*

Note: *1.PC keyboard combinations emulate SUN/Mac keyboards.
2.SUN/Mac keyboards only work with their own computers.

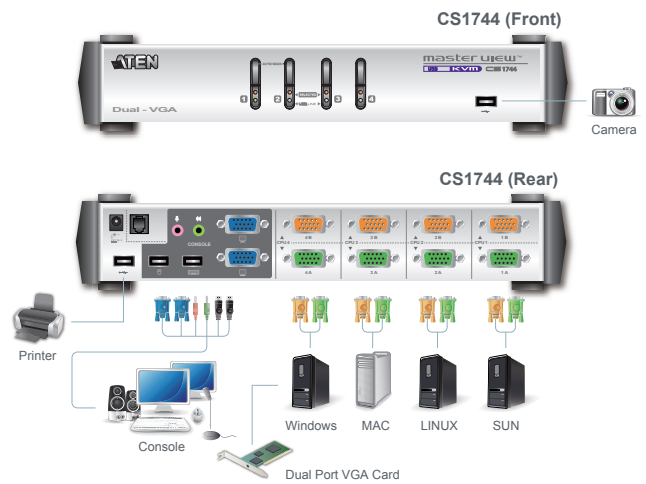

Specification

Function		CS1742	CS1744	
Computer Connections		2	4	
Port Selection		Hotkeys, Pushbutton		
USB Port/ Audio Port Selection		Hotkey		
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)	
		Video	2 x HDB-15 Female (Blue)	
		Mouse	1 x USB Type A Female (White)	
		Speaker	1 x Mini Stereo Jack Female (Green)	
		Microphone	1 x Mini Stereo Jack Female (Pink)	
	KVM Ports	Speaker/ Microphone	2 x SPHD-15 Male (Yellow)	4 x SPHD-15 Male (Yellow)
		Video1		
		Keyboard/Mouse	2 x SPHD-15 Female (Green)	4 x SPHD-15 Female (Green)
		Video2		
	USB Hub		2 x USB Type A Female (White)	
FW upgrade		1 x RJ11 Socket (Black)		
Power		1 x DC 5V Jack (Black)		
Switches	Port	2 x Pushbutton	4 x Pushbutton	
LEDs	On Line / Selected	2 (Orange)	4 (Orange)	
	USB Link	2 (Green)	4 (Green)	
Emulation	Keyboard/Mouse	USB		
Video		2048 x 1536; DDC2B		
Scan Interval		1~99 seconds (Default: 5 sec.)		
Power Consumption		DC5V, 1.25W	DC5V, 1.35W	
Environment	Operating Temp.	0~50°C		
	Storage Temp.	-20~60°C		
	Humidity	0~80% RH, Non-condensing		
Physical Properties	Housing	Metal		
	Weight	0.82 kg	1.03 kg	
	Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm	27.00 x 8.80 x 5.55 cm	

